

# LuxTrust Global Root CA

# **Certificate specifications**

Version number: 1.22

Publication Date: 04/11/2015 Effective Date: 18/11/2015



Copyright © 2015 All rights reserved

# **Document Information**

Document title:	LuxTrust Global Root CA - Certificate specifications
Document Code	N/A
Project Reference:	LuxTrust S.A.
Document Type	Technical Specification
Document Distribution List	Any
Document Classification	Public
Document Owner	CSP Board

# **Version History**

Version	Who	Date	Reason of modification			
1.0	MSC	29/08/2011	Initial Version DRAFT			
1.01	MSC	27/10/2011	Added CRL validity period, revision			
1.02	MSC	24/11/2011	Modified – Document OIDs for CAs			
1.03	MSC	09/02/2012	Modified – Added LCP for integration purposes.			
1.04	MSC	01/03/2012	<ul> <li>Modified:</li> <li>Added LCP for integration purposes for CSS</li> <li>Table for OIDs</li> <li>Modification of the CRL issuance algorithm (SHA256 to SHA1)</li> </ul>			
1.05	MSC	19/03/2012	<ul> <li>Modification of the CrcL issuance algorithm (Criticatoria of Criticatoria of Crit</li></ul>			
1.06	MSC	26/03/2012	Modifications for CSS certificates, signature will be performed using SHA1WithRsa. Changes performed in CSS certificate profile for prod and integration, page 43 and 51.			
1.07	MSC	14/06/2012	Added: TimeStamping CA and TimeStamping certificate profile			
1.08	MSC	29/06/2012	Added: Private key usage Period in TSP			
1.09	LBR	01/08/2012	Added: Certificate Profiles under LuxTrust Global Qualified CA <ul> <li>SC LORA &amp; LRS Certificate</li> </ul> <li>Modified: <ul> <li>Table for OIDs &amp; LuxTrust CA Hierarchy</li> </ul> </li>			
1.09.1	LBR	02/08/2012	Update of OID Page 22			
1.09.2	MSC	07/08/2012	Added: Certificate profile for Extended Validation Certificates : • EVCP – ETSI TS 102 042 • EVCP+ - ETSI TS 102 042 Added: Certificate profile for Secure Online File Exchange (SOFiE)			
1.10	YNU	23/08/2012	Review for validation of CP			
1.10	CSPBoard	24/08/2012	Validation			
1.11	CSPBoard	20/09/2012	Typo update			
1.12	ΥΝU ΤΚΟ	21/12/2012	<ul> <li>Added CP SSL/TLS Certificate for Client Authentication</li> <li>Added CP non SSCD NCP+ Certificates supporting Advanced Electronic Signatures for Mass Signature Services</li> <li>Various syntactical and format corrections</li> </ul>			



1.13	CSP Board	23/04/2013	insertion of ILNAS logo including accreditation reference and technical standards reference			
1.14	YNU	29/11/2013	Update specific requirements for CP under the SSL CA			
1.15	YNU	18/01/2014	Clarification on Mozilla request			
1.16	YNU	05/06/2014	Update Cp			
			- for LuxTrust Global Root Renew			
			- QcS2 et QcS3			
			- Туро			
			Add CP Seal Signature Services			
1.17	YNU	30/06/2014	Add certificate profile for eID			
			CP eID QCP+			
			CP eID NCP+			
			Update CP Seal Signature Services OID			
1.18	YNU	15/10/2014	Update AIA in SSL CA			
1.19	YNU	11/11/2014	Update AIA in CP under the SSL CA since SSL CA 2			
1.20	YNU	19/12/2014	Add Integration CP for eID			
			Update eID CP with pseudonym			
			Update Global Root CA CP with OID attribute			
			Update SSL CA profile since SSL CA 3			
1.21	CSP	25/03/2015	Update lifetime of SSL Server/Object/SSL Client auth to 24 months Update LT CA			
1.21	Board	23/03/2013	- lifetime up to 20 years			
	Dodia		- AIA			
			Update Display text			
			- EV SSL CP			
			Update eID CP			
			Update ILNAS Logo			
1.22	YNU	03/11/2015	Update Common Names in non SSL certificates			
			Remove NetscapeCertType extension from SSL and Object Signing			
			Certificates			
			Added: OCSP signing Certificate which contains an extension of type id-pkix-			
			ocsp-nocheck, as defined by RFC2560			

# **Table of content**

DOCUME	INT INFORMATION	2
VERSION	I HISTORY	2
TABLE O	F CONTENT	4
INTELLE	CTUAL PROPERTY RIGHTS	6
REFERE	NCES	7
1	INTRODUCTION	8
1.1	THE LUXTRUST PROJECT	8
1.2	GOAL OF THE LUXTRUST PKI	
1.3		
2	LUXTRUST CERTIFICATION AUTHORITIES	9
2.1	TWO-LEVEL CA HIERARCHY	
•		40
3	CERTIFICATE AND CRL PROFILES	12
3.1	CERTIFICATE TYPES	12
3.2	LuxTrust Certification Authorities – Certificates profiles	29
3.2.1	LuxTrust Global Root CA	29
3.2.2	LuxTrust Global Qualified CA	
3.2.3	LuxTrust Privacy+ CA	31
3.2.4	LuxTrust SSL CA	33
3.2.5	LuxTrust TEST CA	
3.2.6	LuxTrust Internal CA	
3.2.7	LuxTrust TSA (Timestamping) CA	
3.2.8	LuxTrust e-Government CA	
3.2.9	Certificate extensions	
3.2.10	Algorithm object identifiers	
3.2.11	Name forms	
3.2.12	Name constraints	
3.2.13	Certificate policy object identifier	
<i>3.2.14</i>	Usage of Policy Constraints extension	
<i>3.2.15</i> 3.3	Policy qualifiers syntax and semantics	
3.3 <i>3.3.1</i>	Certificate profiles	
3.3.7 3.3.2	Version number(s)	
3.3.3	LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures	
3.3.4	LuxTrust SSCD NCP+ Certificates supporting Authentication & Encryption	
3.3.5	LuxTrust non SSCD QCP Certificates supporting Advanced Electronic Signatures	
3.3.6	LuxTrust non SSCD NCP Certificates supporting Authentication & Encryption	
3.3.7	LuxTrust Signing Server Account NCP Certificates supporting Signature, Authentication & Encryption	
3.3.8	LuxTrust NCP+ Certificates supporting Mass Signature Services	
3.3.9	LuxTrust SSCD LCP+ Integration Certificates supporting Electronic Signatures	58
3.3.10	LuxTrust SSCD LCP+ Integration Certificates supporting Authentication & Encryption	
3.3.11	LuxTrust Signing Server Account LCP Certificates supporting Signature, Authentication & Encryption for it	ntegration
	purposes	62

### 

#### LuxTrust Global Root CA Certificate Specifications

3.3.12	LuxTrust Smartcard LORA Certificates supporting Signature for LRAO purposes	65
3.3.13	LuxTrust Smartcard LORA Certificates supporting Authentication & Encryption for LRAO purposes	;67
3.3.14	LuxTrust non SSCD Mass LRAO QCP Certificates supporting Advanced Electronic Signatures	
3.3.15	LuxTrust eID SSCD QCP+ Certificates supporting Qualified Signatures	
3.3.16	LuxTrust eID SSCD NCP+ Certificates supporting Authentication & Encryption	
3.3.17	LuxTrust eID SSCD LCP+ Certificates supporting Qualified Signatures	
3.3.18	LuxTrust eID SSCD LCP+ Certificates supporting Authentication & Encryption	
3.3.19	LuxTrust NCP+ Certificates supporting SEAL Signature Services	
3.3.20	LuxTrust SSL/TLS Standard Server Certificates – LCP certificates supporting Signature,	Authentication &
	Encryption	85
3.3.21	SSL/TLS Extended Validation Server Certificates - EVCP certificates supporting Signature,	Authentication &
	Encryption	
3.3.22	SSL/TLS Extended Validation Server Certificates - EVCP+ certificates supporting Signature,	Authentication &
	Encryption	
3.3.23	LuxTrust Object (or Code) Signing Certificates	
3.3.24	LuxTrust SSL/TLS Certificate for Client Authentication	
3.3.25	Timestamping Certificate Profile	
3.3.26	Certificate extensions	
3.3.27	Algorithm object identifiers	
3.3.28	Name forms	
3.3.29	Name constraints	
3.3.30	Certificate policy object identifier	
3.3.31	Usage of Policy Constraints extension	
3.3.32	Policy qualifiers syntax and semantics	
3.3.33	Processing semantics for the critical Certificate Policies	
3.4	CRL PROFILE	111
3.4.1	Version number(s)	
3.4.2	CRL entry extensions	
3.5	OCSP PROFILE	112
3.5.1	Version number(s)	
3.5.2	OCSP extensions	



## **Intellectual Property Rights**

Without limiting the "all rights reserved" copyright on the present document, and except as duly licensed under written form, no part of this publication may be reproduced, stored in or introduced into a retrieval system, or transmitted, in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise) without prior written permission of LuxTrust S.A..



### **References**

- [1] The European Directive 1999/93/EC of the European Parliament and of the Council of 13 December 1999 on a Community framework for electronic signatures.
- [2] European Data Protection Directive 95/46/EC of the European Parliament and of the Council of 24 October 1995 on the protection of individuals with regards to the processing of personal data and on the free movement of such data.
- [3] ETSI TS 101 456 Electronic Signatures and Infrastructures (ESI); Policy requirements for certification authorities issuing qualified certificates.
- [4] ETSI TS 102 042 Electronic Signatures and Infrastructures (ESI); Policy requirements for certification authorities issuing public key certificates.
- [5] ICAO (International Civil Aviation Organization) Machine Readable Travel Documents Technical Report PKI for Machine Readable Travel Documents offering ICC Read-Only Access, version 1.1, October 01, 2004
- [6] ETSI TS 102 023 Electronic Signatures and Infrastructures (ESI); Policy requirements for time-stamping authorities.
- [7] Loi du 22 mars 2000 relative à la création d'un Registre national d'accréditation, d'un Conseil national d'accréditation, de certification, de normalisation et de promotion de la qualité et d'un organisme luxembourgeois de normalisation.
- [8] Loi modifiée du 14 août 2000 relative au commerce électronique modifiant le code civil, le nouveau code de procédure civile, le code de commerce, le code pénal et transposant la directive 1999/93/EC relative à un cadre communautaire pour les signatures électroniques, la directive relative à certains aspects juridiques des services de la société de l'information, certaines dispositions de la directive 97/7/CEE concernant la vente à distance des biens et des services autres que les services financiers.
- [9] Règlement Grand-Ducal du 28 décembre 2001 portant détermination d'un système d'accréditation des organismes de certification et d'inspection, ainsi que des laboratoires d'essais et d'étalonnage et portant création de l'Office Luxembourgeois d'Accréditation et de Surveillance, d'un Comité d'accréditation et d'un Recueil national des auditeurs qualité et techniques.
- [10] Règlement Grand-Ducal du 1<sup>er</sup> juin 2001 relatif aux signatures électroniques, au paiement électronique et à la création du Comité « Commerce Electronique ».
- [11] Règlement Grand-Ducal du 21 décembre 2004 portant organisation de la notification des prestataires de services délivrant des certificats qualifiés mettant en place un système d'accréditation des prestataires de service de certification, créant un comité signature électronique et déterminant la procédure d'agrément des auditeurs externes.
- [12] LuxTrust Time Stamping Policy. Document OID 1.3.171.1.1.3.1.0, latest version in force.
- [13] Guidelines for the Issuance And Management Of Extended Validation Certificates. CA/Browser Forum. Latest version in force.
- [14] Baseline Requirements for the Issuance and Management of Publicly-Trusted Certificates. CA/Browser Forum. Latest version in force.
- [15] eID Certificate Life Cycle Procedure latest version in force
- [16] RNCID: National Register of identity cards as specified in the national law 19/06/2013, section 5, article 16
- [17] Règlement grand-ducal du 25 février 2015 modifiant le règlement grand-ducal du 18 juin 2014 relatif à la carte d'identité
- [18] [Règlement grand-ducal du 18 juin 2014 relatif à la carte d'identité
- [19] Loi du 19 juin 2013 Loi du 19 juin 2013 relative à l'identification des personnes physiques, au registre national des personnes physiques, à la carte d'identité, aux registres communaux des personnes physiques

## 1 INTRODUCTION

#### 1.1 The LuxTrust project

The LuxTrust project was created in the form of a Trusted Third Party (hereafter also "TTP"), with an international reach, aiming to establish a national expertise centre for Luxembourg. LuxTrust as TTP especially focuses on providing support for any existing business needs in terms of security and also promotes new "e-business" and "e-government" opportunities, making the best possible use of existing legal and commercial assets which are unique to Luxembourg.

Established in November 2005 through a partnership between the Luxembourg government and the major private financial actors in Luxembourg, LUXTRUST S.A. was created to become a provider of certification services as defined in the law of the Grand-Duchy of Luxembourg modified on 14/08/2000 [7] itself derived from the European Directive on electronic signatures (1999/93/EC; cf. [1]). These laws and directives set out the legal framework for electronic signatures in the Grand-Duchy of Luxembourg as well as for LuxTrust activities as TTP.

LuxTrust S.A. acts as Financial Sector Professional providing Public Key Infrastructure (PKI) services for the whole economic marketplace in Luxembourg, for both private and public organisations.

#### 1.2 Goal of the LuxTrust PKI

The Goal of LuxTrust PKI is to provide to each end-user, in Luxembourg but also outside its national borders, one single shared platform to secure both Government and Private e-applications. Security services supported and provided by the LuxTrust PKI will primarily cover the following services for all applications:

- Strong Authentication;
- Electronic Signatures;
- Encryption facilities;
- Trusted Time Stamping;

LuxTrust will also promote these services towards application service providers in order to facilitate the emergence of eapplications and accelerate eLuxembourg. Within this context, LuxTrust will form the catalyser of such services and applications.

#### 1.3 LuxTrust PKI Hierarchy

LuxTrust S.A., acting as CSP as described in the law of Grand-Duchy of Luxembourg modified on 14/08/2000 [7], is using several Certification Authorities (CAs), as shown in the certificates hierarchy, to issue LuxTrust end-users certificates. These top level CAs are displayed on Figure 1 and figure 2.

In all (CA-) certificates issued to these CAs, LuxTrust S.A. is referred to as the legal entity being the certificate issuing authority, assuming final responsibility and liability for all LuxTrust CAs and services used by LuxTrust S.A. for provision of LuxTrust certifications services through any one of its CAs.

This responsibility and liability is still valid when LuxTrust S.A. acting as CSP through any of its CAs is sub-contracting services or part of services process to third parties. Sub-contracting agreements shall include back-to-back provisions to ensure that sub-contractors shall support the liability and responsibility for the sub-contracted provisioned services.

### 2 LuxTrust Certification Authorities

As described in section 1.3, LuxTrust S.A. acting as CSP is using several Certification Authorities (CAs) to issue LuxTrust Certificates.

#### 2.1 Two-level CA hierarchy

The top level is the *LuxTrust Global Root CA*, the highest level of authority managed by LuxTrust. The LuxTrust PKI is formed using additional subordinates CAs: The legal person (organisation) responsible for these CAs is LuxTrust S.A. acting as CSP.

The LuxTrust PKI consists in a two-level CA hierarchy:

- One "LuxTrust Global Root CA" root-signing all subordinates LuxTrust CAs
- LuxTrust subordinate CAs. Each of these CAs is root-signed by the LuxTrust Global Root CA. Currently, the following CAs are foreseen:
  - LuxTrust Global Qualified CA
  - LuxTrust Privacy+ CA
  - LuxTrust SSL CA
  - LuxTrust TEST CA
  - LuxTrust Internal CA
  - LuxTrust Time Stamping Authority
  - LuxTrust eGovernment CA
- Additional CAs or CA hierarchies might be signed in the future under the LuxTrust Global Root CA

Subordinate CAs are operating within a grant of authority for issuing certificates under the LuxTrust CPS and the applicable CP. This grant has been provided by the "LuxTrust Global Root CA" (hereafter "LTGRCA") under the responsibility and authority of LuxTrust S.A. acting as CSP.

Note 1: Unless explicitly otherwise indicated, "the CA", refers to the LuxTrust Global Root CA granted to issue CA Certificates under responsibility of LuxTrust S.A. acting as CSP. "The CA" is thus legally designating LuxTrust S.A. acting as CSP.

LuxTrust S.A. acting as CSP ensures the availability of all services pertaining to the Certificates, including the issuance, suspension/un-suspension/revocation and renewal services as they may become available or required in specific applications.



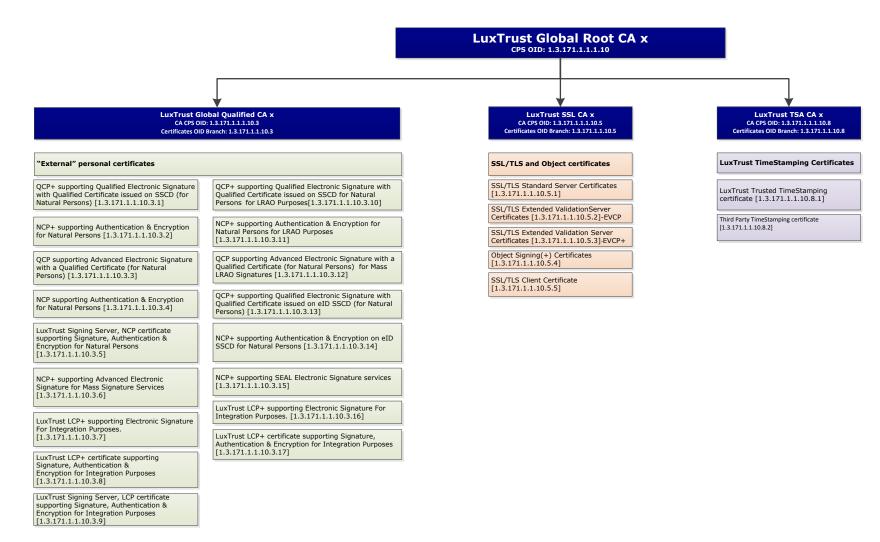


Figure 1 - LuxTrust running CA Hierarchy

VERSION 1.22

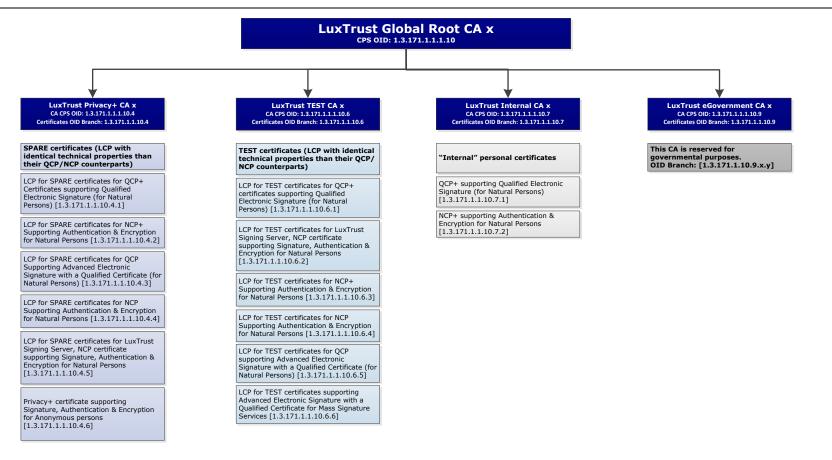


Figure 2 - LuxTrust foreseen CA Hierarchy

# 3 CERTIFICATE AND CRL PROFILES

#### 3.1 Certificate types

The following table indicates and shortly describes the various types of certificates that are to be issued by LuxTrust under the new LuxTrust Global Root CA:

CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>		
LuxTrust Qualified Ce	LuxTrust Qualified Certification Authority					
QCP+ supporting Qualified Electronic Signature (for Natural Persons) issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.1	1.3.171.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP+ compliant Qualified Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of qualified electronic signature. These Certificates are covered by the ILNAS accreditation as registered under the reference N° 2011/8/001 by the national registry of Accredited Certification Service Providers.	LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures		
NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.2	1.3.171.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption. These Certificates are covered by the ILNAS accreditation as registered under the reference N° 2011/8/001 by the national registry of Accredited Certification Service Providers.	LuxTrust SSCD NCP+ Certificates supporting Authentication & Encryption		

<sup>&</sup>lt;sup>1</sup> Corresponding CP will be defined later when field is empty.



CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
QCPsupportingAdvancedElectronicSignaturewithQualifiedCertificate(for Natural Persons)issuedbyLuxTrustGlobal Qualified CA	1.3.171.1.1.10.3.3	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP compliant Qualified Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate.	LuxTrust non SSCD QCP Certificates supporting Advanced Electronic Signatures
NCP supporting Authentication & Encryption for Natural Persons issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.4	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP compliant Normalised Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption.	LuxTrust non SSCD NCP Certificates supporting Authentication & Encryption
LuxTrustSigningServer, NCP certificatesupportingSignature,Authentication&EncryptionforNaturalPersonsissuedbyLuxTrustGlobal Qualified CA	1.3.171.1.1.10.3.5	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP compliant Normalised Certificate issued on a <b>non</b> SSCD centralized hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048- bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption.	LuxTrust Signing Server Account NCP Certificates supporting Signature, Authentication & Encryption
NCP+ supporting Advanced Electronic Mass Signature Services issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.6	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on Secure User Device (HSM), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic Mass Signature Services.	LuxTrust NCP+ Certificates supporting Mass Signature Services
LCP for INTEGRATION certificates LCP compliant certificates supporting integration Electronic Signature issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.7	1.3.171.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of electronic signature for INTEGRATION purposes of QCP+ signature certificates.	LuxTrust SSCD LCP+ Integration Certificates supporting Electronic Signatures



CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
LCP for INTEGRATION certificates LCP+ supporting Authentication & Encryption issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.8	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048- bit key size and three (3) years, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for INTEGRATION purposes of NCP+ authentication and encryption certificates.	LuxTrust SSCD LCP+ Integration Certificates supporting Authentication & Encryption
LCP for INTEGRATION certificates for NCP+ supporting Authentication & Encryption issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.9	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Normalised Certificate issued on a <b>non</b> SSCD centralized hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048- bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for INTEGRATION PURPOSES.	LuxTrust Signing Server Account LCP Certificates supporting Signature, Authentication & Encryption for integration purposes
QCP+supportingQualifiedElectronicSignaturewithQualifiedCertificateissued onSSCD forNaturalPersonsforLRAOPurposesissuedbyLuxTrustGlobalQualifiedCA	1.3.171.1.1.10.3.10	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP+ compliant Qualified Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of qualified electronic signature for LRAO Purposes.	LuxTrust Smartcard LORA Certificates supporting Signature for LRAO purposes
NCP+ supporting Authentication & Encryption for Natural Persons for LRAO Purposes issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.11	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for LRAO Purposes.	LuxTrust Smartcard LORA Certificates supporting Authentication & Encryption for LRAO purposes





I

#### LuxTrust Global Root CA Certificate Specifications

CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
QCPsupportingAdvancedElectronicSignaturewithQualifiedCertificateMassLRAOSignatureissuedbyLuxTrustGlobalQualifiedCA	1.3.171.1.1.10.3.12	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP compliant Qualified Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for Mass LRAO Signatures.	LuxTrust non SSCD Mass LRAO QCP Certificates supporting Advanced Electronic Signatures
QCP+ supporting Qualified Electronic Signature (for Natural Persons) issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.13	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP+ compliant Qualified Certificate on SSCD Hardware token (e.g., Luxemburguish eID Smart Card), with creation of the keys by the CSP, 2048 bit key size and sixty-one (61) months validity, and with a key usage limited to the support of qualified electronic signature.	LuxTrust eID SSCD QCP+ Certificates supporting Qualified Signatures
NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.14	1.3.171.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on SSCD Hardware token (e.g., Luxemburguish eID Smart Card), with creation of the keys by the CSP, 2048-bit key size and sixty-one (61) months validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption.	LuxTrust eID SSCD NCP+ Certificates supporting Authentication & Encryption
NCP+AdvancedElectronicSealSignature ServicesissuedbyLuxTrustGlobal Qualified CA	1.3.171.1.1.10.3.15	1.3.171.1.1.10.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on Secure User Device (HSM), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic Seal Signature Services.	LuxTrust NCP+ Certificates supporting SEAL Signature Services
LCP for INTEGRATION certificates LCP compliant certificates supporting integration Electronic Signature issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.16	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., Luxemburguish eID Smart Card), with creation of the keys by the CSP, 2048 bit key size and one (1) year validity, and with a key usage limited to the support of electronic signature for INTEGRATION purposes of QCP+ signature certificates.	LuxTrust eID SSCD LCP+ Certificates supporting Qualified Signatures



<b>CP</b> identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
LCP for INTEGRATION certificates LCP supporting Authentication & Encryption issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.17	1.3.171.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., Luxemburguish eID Smart Card), with creation of the keys by the CSP, 2048 bit key size and one (1) year validity, and with a key usage limited to the support of authentication (to the exclusion of electronic signature) and key & data encryption for INTEGRATION purposes of NCP+ signature certificates.	LuxTrust eID SSCD LCP+ Certificates supporting Authentication & Encryption
LuxTrust Privacy+ Certifi	cation Authority	<u> </u>		
LCP for SPARE certificates for QCP+ certificates supporting Qualified Electronic Signature (for Natural Persons) <b>issued by LuxTrust</b> <b>Privacy+ CA</b>	1.3.171.1.1.10.4.1	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of electronic signature for SPARE purposes of QCP+ signature certificates.	
LCP for SPARE certificates for NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.2	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048- bit key size and three (3) years, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for SPARE purposes of NCP+ authentication and encryption certificates.	
LCP for SPARE certificates for QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.3	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for SPARE purposes of QCP signature certificates.	



CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
LCP for SPARE certificates for NCP supporting Authentication & Encryption for Natural Persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.4	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for SPARE purposes of NCP authentication and encryption certificates.	
LCP for SPARE certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.5	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate issued on a <b>non</b> SSCD centralised hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for SPARE purposes of NCP authentication, encryption and signature certificates.	
Privacy+ certificate supporting Signature, Authentication & Encryption for Anonymous persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.6	1.3.171.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate issued on a <b>non</b> SSCD hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for authentication, encryption and signature certificates.	
LuxTrust SSL Certification	on Authority			





CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
SSL/TLS(+) Standard Server Certificates issued by LuxTrust SSL CA	1.3.171.1.1.10.5.1	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 <b>LCP</b> compliant certificate, produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1), (2) or (3) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication and secure e-mail.	LuxTrust SSL/TLS Standard Server Certificates – LCP certificates supporting Signature, Authentication & Encryption
SSL/TLS(+) Extended Validation Server Certificates - EVCP issued by LuxTrust SSL CA	1.3.171.1.1.10.5.2	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 <b>EVCP</b> compliant certificate, produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1) or (2) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication and secure e-mail.	SSL/TLS Extended Validation Server Certificates – EVCP certificates supporting Signature, Authentication & Encryption
SSL/TLS(+) Extended Validation Server Certificates – EVCP+ issued by LuxTrust SSL CA	1.3.171.1.1.10.5.3	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 <b>EVCP+</b> compliant certificate, on Secure User Device, produced by SSL CA, 2048-bit key size, (1) or (2) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication and secure e- mail.	SSL/TLS Extended Validation Server Certificates - EVCP+ certificates supporting Signature, Authentication & Encryption
Object Signing(+) Certificates issued by LuxTrust SSL CA	1.3.171.1.1.10.5.4	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 <b>LCP</b> compliant certificate produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1), (2) or (3) years validity, and a key usage combining digital signature (dS bit), key and data encryption.	LuxTrust Object (or Code) Signing Certificates



CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
LuxTrust SSL/TLS Certificate for Client Authentication issued by LuxTrust SSL CA	1.3.171.1.1.10.5.5	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 <b>LCP</b> compliant certificate produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1), (2) or (3) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for client authentication and secure e-mail.	LuxTrust SSL/TLS Certificate for Client Authentication
LuxTrust TEST Certificat	ion Authority			
LCP for TEST certificates for QCP+ certificates supporting Qualified Electronic Signature (for Natural Persons) issued by LuxTrust Test CA	1.3.171.1.1.10.6.1	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of electronic signature for TEST purposes of QCP+ signature certificates.	
LCP for TEST certificates for NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Test CA	1.3.171.1.1.10.6.2	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048- bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for TEST purposes of NCP+ authentication and encryption certificates.	
LCP for TEST certificates for QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) issued by LuxTrust Test CA	1.3.171.1.1.10.6.3	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for TEST purposes of QCP signature certificates.	



CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
LCP for TEST certificates for NCP supporting Authentication & Encryption for Natural Persons issued by LuxTrust Test CA	1.3.171.1.1.10.6.4	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for TEST purposes of NCP authentication and encryption certificates.	
LCP for TEST certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons issued by LuxTrust Test CA	1.3.171.1.1.10.6.5	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate issued on a <b>non</b> SSCD centralised hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity or validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for TEST purposes of NCP authentication, encryption and signature certificates.	
LCP for TEST certificates supporting Advanced Electronic Signature with a Qualified Certificate for Mass Signature Services issued by LuxTrust Test CA	1.3.171.1.1.10.6.6	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 101 456 QCP compliant Qualified Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for Mass Signature Services.	
LuxTrust Internal Certific	ation Authority			
QCP+supportingQualifiedElectronicSignature(for NaturalPersons)issued by LuxTrustInternal CAInternal CA	1.3.171.1.1.10.7.1	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)		



VERSION 1.22

CP identification	CP OID	Document OID	Short Description	Ref. <sup>1</sup>
NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Internal CA	1.3.171.1.1.10.7.2 ping) Certification Authority 1.3.171.1.1.10.8.1	1.3.171.1.1.10.2.6 .x(version) .y(sub-version) 1.3.171.1.1.10.2.6 .x(version) .y(sub-version)	LuxTrust certificate compliant with ETSI TS 102 023. Sole authorised usage: Signature of LuxTrust Trusted Time Stamp tokens generated by LuxTrust time-stamping authority. These Certificates are covered by the ILNAS accreditation as registered under the reference N° 2011/8/001 by the national registry of Accredited Certification Service Providers.	Timestamping Certificate Profile
Third Party TimeStamping certificate issued by LuxTrust TSA CA	1.3.171.1.1.10.8.2	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)		

Subscriber's Agreement (Purchase Orders and General Terms and Conditions) is made available to customers by LuxTrust S.A. acting as CSP.

In addition to these "external" certificate types, "Internal Certificate Policies" are exclusively reserved by LuxTrust S.A. acting as CSP for issuance of security credentials (and certificates) within the management and operation domains of the LuxTrust PKI. This encompasses but is not limited to PKI component services provider's entities (e.g., RA, SRA, TSAs, devices, components, etc.), specific officers considered as security officers, etc.

Within the present document, Certificates issued by LuxTrust S.A. acting as CSP are collectively called the "Certificates" regardless of their type, unless they are more clearly and specifically identified.

In addition to the above described certifications services, the LuxTrust CSP activities include the LuxTrust Time Stamping Services (TSS). These services consist of the management of the infrastructure, and the provisioning of Time Stamp Tokens according to the LuxTrust Time Stamping Policy [12].

These services are provided by LuxTrust S.A. acting as LuxTrust Trusted Time Stamping Services Provider (TTSSP) to the Subscribers and are an integral part of the LuxTrust PKI. Hereafter the term CSP includes the activities and provision of trusted time stamping services as expressed in the European Directive on electronic signatures (cf. [1]). LuxTrust Trusted Time Stamping services are covered within the LuxTrust Trusted Time Stamping V2 policy [12].

The LuxTrust CSP Board acts as Policy Approval Authority for LuxTrust S.A.. In particular the CSP board manages the LuxTrust Certification Practice Statement (CPS) and all related CPs, covering the statements of the practices followed by LuxTrust S.A. acting as CSP in issuing CA and end-entities certificates as well as in issuing TSTs through its TSAs.

Page 21 de 113



By means of the CPS and related CPs, LuxTrust S.A. acting as CSP indicates and guarantees that it complies with regulatory and standard texts applicable, and whether or not this guarantee is supported by an accreditation as well as the name and coordinates of the accreditation body.

Page 22 de 113

LuxTrust S.A. OID : 1.3.171.1	ETSI OIDs	QCP+	0.4.0.1456.1.1
LuxTrust PKI: 1.3.171.1.1	for info	QCP	0.4.0.1456.1.2
		NCP	0.4.0.2042.1.1
		NCP+	0.4.0.2042.1.2
		LCP	0.4.0.2042.1.3

Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
.uxTrust Certifica	ation Practice Statements							
	1		0 (master)		x	у	1.3.171.1.1. <b>1.1.0.x.y</b>	N/A
	CPS Summary							N/A
		0	Not Used		N/A	N/A	not used	N/A
		1	First document		x	у	1.3.171.1.1. <b>1.2.1.x.y</b>	N/A
	2 Full CPS GTE Chain	2	Second document		x	у	1.3.171.1.1. <b>1.2.2.x.y</b>	N/A
	Full CFS GTE Chain	3	Third document		x	у	1.3.171.1.1. <b>1.2.3.x.y</b>	N/A
		4	Fourth document		x	у	1.3.171.1.1. <b>1.2.4.x.y</b>	N/A
			etc.		x	у	1.3.171.1.1.1.1.2.5.x.y	N/A
1		0	0 Reserved		N/A			N/A
CPS LuxTrust		1	Reserved		N/A			N/A
		2	LuxTrust Global Root CA		x	у	1.3.171.1.1. <b>1.10.2.x.y</b>	N/A
		3	LuxTrust Global Qualified CA		x	у	1.3.171.1.1. <b>1.10.3.x.y</b>	N/A
	10	4	LuxTrust Privacy+ CA		x	у	1.3.171.1.1. <b>1.10.4.x.y</b>	N/A
	CPS LuxTrust Global Root	5	LuxTrust SSL CA		x	y	1.3.171.1.1. <b>1.10.5.x.y</b>	N/A
		6	LuxTrust TEST CA		x	у	1.3.171.1.1. <b>1.10.6.x.y</b>	N/A
		7	LuxTrust Internal CA		x	y	1.3.171.1.1. <b>1.10.7.x.y</b>	N/A
		8	LuxTrust Global Timestamping CA		x	y	1.3.171.1.1. <b>1.10.8.x.y</b>	N/A
		9	LuxTrust eGovernment CA		x	y	1.3.171.1.1. <b>1.10.9.x.y</b>	N/A
.uxTrust Certific	ate Policies			·			·	•
<b>10</b> P's LuxTrust Global	1 Reserved							N/A
Chain	2 Reserved							N/A



Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
		0	Master document	N/A	x	у	1.3.171.1.1.10.3.0.x.y	N/A
		1	QCP+ supporting Advanced Electronic Signature with Qualified Certificate issued on SSCD (for Natural Persons)	SmartCard PRI/PRO Signature Certificate	-	-	1.3.171.1.1.10.3.1	0.4.0.1456.1.1
		2	NCP+ supporting Authentication & Encryption for Natural Persons	SmartCard PRI/PRO Authentication Certificate	-	-	1.3.171.1.1.10.3.2	0.4.0.2042.1.2
		3	QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons)	Signing Stick PRI/PRO Signature Certificate	-	-	1.3.171.1.1.10.3.3	0.4.0.1456.1.2
		4	NCP Authentication & Encryption	Signing Stick PRI/PRO Authentication Certificate	-	-	1.3.171.1.1.10.3.4	0.4.0.2042.1.1
	3	5	NCP Authentication, Encryption & Signature [LuxTrust Signing Server]	Signing Server Certificate	-	-	1.3.171.1.1.10.3.5	0.4.0.2042.1.1
	LuxTrust Global Qualified CA Certificates issued to Natural Persons	6	NCP+ supporting AdES for Mass Signature Services	Mass Signature Service signature Certificate	-	-	1.3.171.1.1.10.3.6	0.4.0.2042.1.1
		7	LuxTrust LCP+ supporting Electronic Signature For Integration purposes.	Integration SmartCard Signature Certificate	-	-	1.3.171.1.1.10.3.7	0.4.0.2042.1.3
		8	LuxTrust LCP+ certificate supporting Signature, Authentication & Encryption for Integration purposes	Integration SmartCard Authentication Certificate	-	-	1.3.171.1.1.10.3.8	0.4.0.2042.1.3
	9	9	LuxTrust LCP Certificates supporting Signature, Authentication & Encryption for integration purposes	Integration Signing Server Certificate	-	-	1.3.171.1.1.10.3.9	0.4.0.2042.1.3
		10	QCP+ supporting Advanced Electronic Signature with Qualified Certificate issued on SSCD (for Natural Persons) for Natural Persons for LRAO Purposes	SmartCard LORA Signature Certificate	-	-	1.3.171.1.1.10.3.10	0.4.0.1456.1.1



Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
		11	NCP+ supporting Authentication & Encryption for Natural Persons for LRAO Purposes	SmartCard LORA Authentication Certificate	-	-	1.3.171.1.1.10.3.11	0.4.0.2042.1.2
		12	QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) for Mass LRAO Signatures [1.3.171.1.1.10.3.12]	Mass LRAO Signature Certificate	-	-	1.3.171.1.1.10.3.12	0.4.0.1456.1.2
		13	QCP+ supporting Advanced Electronic Signature with Qualified Certificate issued on SSCD (for Natural Persons)	elD SmartCard Signature Certificate	-	-	1.3.171.1.1.10.3.13	0.4.0.1456.1.1
		14	NCP+ supporting Authentication & Encryption for Natural Persons	eID SmartCard Authentication Certificate	-	-	1.3.171.1.1.10.3.14	0.4.0.2042.1.2
		15	NCP+ supporting Advanced Electronic Seal Signature Services	Seal Signature Services	-	-	1.3.171.1.1.10.3.15	0.4.0.1456.1.2
		16	LuxTrust LCP+ supporting Electronic Signature For Integration purposes.	Integration eID SmartCard Signature Certificate	-	-	1.3.171.1.1.10.3.16	0.4.0.2042.1.3
		17	LuxTrust LCP+ certificate supporting Signature, Authentication & Encryption for Integration purposes	Integration eID SmartCard Authentication Certificate	-	-	1.3.171.1.1.10.3.17	0.4.0.2042.1.3
		0	Master document		x	у	1.3.171.1.1.10.4.0.x.y	N/A
	<b>4</b> LuxTrust Privacy+ CA	1	LCP for SPARE certificates for QCP+ Certificates supporting Qualified Electronic Signature (for Natural Persons)	SmartCard SPARE Signature certificate	-	-	1.3.171.1.1.10.4.1	0.4.0.2042.1.3
		2	LCP for SPARE certificates for NCP+ Supporting Authentication & Encryption for Natural Persons	SmartCard SPARE Authentication Certificate	-	-	1.3.171.1.1.10.4.2	0.4.0.2042.1.3



#### VERSION 1.22

Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
		3	LCP for SPARE certificates for QCP Supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons)	Signing Stick SPARE Signature Certificate	-	-	1.3.171.1.1.10.4.3	0.4.0.2042.1.3
		4	LCP for SPARE certificates for NCP Supporting Authentication & Encryption for Natural Persons	Signing Stick SPARE Authentication Certificate	-	-	1.3.171.1.1.10.4.4	0.4.0.2042.1.3
		5	LCP for SPARE certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons	Signing Server SPARE certificate	-	-	1.3.171.1.1.10.4.5	0.4.0.2042.1.3
		6	Privacy+ certificate supporting Signature, Authentication & Encryption for Anonymous persons	Signing Server Privacy+ Certificate	-	-	1.3.171.1.1.10.4.6	
		0	Master document	N/A	x	у	1.3.171.1.1.10.5.0.x.y	N/A
10		1	SSL/TLS Standard Server Certificates	SSL/TLS Standard Server Certificates	-	-	1.3.171.1.1.10.5.1	0.4.0.2042.1.3
CP's LuxTrust Global Chain		2	SSL/TLS(+) Extended Validation Server Certificates — EVCP	SSL/TLS Extended Validation Server Certificates	-	-	1.3.171.1.1.10.5.2	0.4.0.2042.1.4
	<b>5</b> LuxTrust SSL CA	3	SSL/TLS(+) Extended Validation Server Certificates - EVCP+	SSL/TLS Extended Validation Server Certificates on Secure Device	-	-	1.3.171.1.1.10.5.3	0.4.0.2042.1.5
		4	Object Signing(+ ) Certificates	Object Signing(+ ) Certificates	-	-	1.3.171.1.1.10.5.4	0.4.0.2042.1.3
		5	SSL/TLS Client Certificate	SSL/TLS Client Certificate			1.3.171.1.1.10.5.5	0.4.0.2042.1.3
		0	Master document	N/A	x	у	1.3.171.1.1.10.6.0	N/A
ŀ	6	1	LCP for TEST certificates for QCP+ certificates		-	-	1.3.171.1.1.10.6.1	0.4.0.2042.1.3

Page 26 de 113



Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
	LuxTrust TEST CA		supporting Qualified Electronic Signature (for Natural Persons)					
		2	LCP for TEST certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons		-	-	1.3.171.1.1.10.6.2	0.4.0.2042.1.3
		3	LCP for TEST certificates for NCP+ Supporting Authentication & Encryption for Natural Persons		-	-	1.3.171.1.1.10.6.3	0.4.0.2042.1.3
		4	LCP for TEST certificates for NCP Supporting Authentication & Encryption for Natural Persons		-	-	1.3.171.1.1.10.6.4	0.4.0.2042.1.3
		5	LCP for TEST certificates for QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons)		-	-	1.3.171.1.1.10.6.5	0.4.0.2042.1.3
		6	LCP for TEST certificates supporting Advanced Electronic Signature with a Qualified Certificate for Mass Signature Services		-	-	1.3.171.1.1.10.6.6	0.4.0.2042.1.3
		0	Master document	N/A	x	у	1.3.171.1.1.10.7.0	N/A
		1	QCP+ supporting Qualified Electronic Signature (for Natural Persons)	RA SmartCard Signature certificate	-	-	1.3.171.1.1.10.7.1	0.4.0.1456.1.2
	7 LuxTrust Internal CA	2	NCP+ supporting Authentication & Encryption for Natural Persons	RA SmartCard Authentication certificate	-	-	1.3.171.1.1.10.7.2	0.4.0.2042.1.2
		0	Master document	N/A			1.3.171.1.1.10.8.0	N/A
	8	1	LuxTrust Trusted TimeStamping certificate	LuxTrust Trusted TimeStamping certificate			1.3.171.1.1.10.8.1	
	LuxTrust Global Timestamping CA	2	Third Party TimeStamping certificate	Third Party TimeStamping certificate			1.3.171.1.1.10.8.2	
		0	Master document	N/A			1.3.171.1.1.10.9.0	N/A
	<b>8</b> LuxTrust eGovernment CA	Reser ved for future use						



Document category	Document	Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID

#### 3.2 LuxTrust Certification Authorities – Certificates profiles

LuxTrust certificates are X.509 v3, compliant with RFC 5280.

LuxTrust CAs certificate profiles description is available as follows:

#### 3.2.1 LuxTrust Global Root CA

	Lux	Trust Glo	obal Roo	ot CA	
Base Profile	OID	Included	Critical	Value	
Version		x		V3	
SerialNumber		х		As provided by CA or by LuxTrust S.A.	
SignatureAlgorithm					
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing CA Signature	
Validity					
NotBefore		х		Key Generation Process Date/Time	
NotAfter		x		Key Generation Process Date/Time + 10;20 years	Fixed
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001). 20 years certificate requires a 4096 key length.	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x <sup>2</sup>	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust Global Root x <sup>2</sup>	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies <sup>3</sup>	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.10	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier	CPSuri	х		https://repository.luxtrust.lu	Fixed

 $^{2}$  X is a sequential value to distinguish the old CA from the renewed CA. The value 1 is omitted as it is the first CA issued.

<sup>3</sup> Since LuxTrust Global Root 2

Page 29 de 113



VERSION 1.22

	Lux	Trust Glo	obal Roo	t CA	
Base Profile	OID	Included	Critical	Value	
KeyUsage	{id-ce 15}	х	TRUE <sup>7</sup>		
CertificateSigning				Set	Fixed
crlSigning				Set	Fixed
authorityKeyIdentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash	
subjectKeyIdentifier	{id-ce 14}	х	FALSE		
Keyldentifier		х		SHA-1 Hash	
BasicConstraints	{id-ce 19}	х	TRUE <sup>7</sup>		
CA		х		TRUE	Fixed
pathLenConstraint		Х		None	Fixed

#### 3.2.2 LuxTrust Global Qualified CA

	LuxTrust Global Qualified CA						
Base Profile	OID	Included	Critical	Value			
Version		х		V3			
SerialNumber		х		As provided by CA or by LuxTrust S.A.			
SignatureAlgorithm							
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed		
SignatureValue		х		Issuing LTGRCA Signature			
Validity							
NotBefore		х		Key Generation Process Date/Time			
NotAfter		x		Key Generation Process Date/Time +up to 20 years	Fixed		
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001). 20 years certificate requires a 4096 key length.			
lssuer							
CountryName	{ id-at-6 }	х		LU	Fixed		
CommonName	{ id-at-3 }	x		LuxTrust Global Root x <sup>2</sup>	Fixed		
organizationName		х		LuxTrust S.A.	Fixed		
Subject							
CountryName	{ id-at-6 }	х		LU	Fixed		
CommonName	{ id-at-3 }			LuxTrust Global Qualified CA x <sup>4</sup>	Fixed		

 $^4$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.





VERSION 1.22

	LuxTr	ust Glob	al Qualif	ied CA	
Base Profile	OID	Included	Critical	Value	
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	Х	FALSE		
policyIdentifier		х		1.3.171.1.1.10.3	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier	CPSuri	х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE <sup>7</sup>		
keyCertSign				Set	Fixed
crlSign				Set	Fixed
authorityKeyIdentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Authority public key	
authorityInfoAccess <sup>5</sup>	{id-pe 1}		False		
AccessMethod	{Id-ad-1}				
accessLocation		х		http://ltgroot.ocsp.luxtrust.lu	Fixed
AccessMethod	{Id-ad-2}		False		
accessLocation		x		http://ca.luxtrust.lu/LTGRCAx <sup>22</sup> .crt	Fixed
subjectKeyIdentifier	{id-ce 14}	Х	FALSE		
Keyldentifier		х		SHA-1 Hash of Subject public key	
cRLDistributionPoints	{id-ce 31}	х	FALSE		
distributionPoint					
FullName		х		http://crl.luxtrust.lu/LTGRCAx <sup>6</sup> .crl	Fixed
BasicConstraints	{id-ce 19}	Х	TRUE <sup>7</sup>	N/A	
CA		Х		TRUE	Fixed
pathLenConstraint		х		0 (Zero)	Fixed

#### 3.2.3 LuxTrust Privacy+ CA

LuxTrust Privacy+ CA								
Base Profile	OID	Included	Critical	Value				
Version		х		V3				
SerialNumber		х		As provided by CA or by LuxTrust S.A.				
SignatureAlgorithm								
Algorithm	1.2.840.113549.1.1.11	Х		SHA256 with RSA Encryption	Fixed			

<sup>&</sup>lt;sup>5</sup> Since LuxTrust Global Qualified CA 3

 $<sup>^{6}</sup>$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued

<sup>&</sup>lt;sup>7</sup> Criticality of this extension should be carefully considered with regards to the compliance with RFC 5280 stating in its section 4.2.1.10 that "*This* extension MUST appear as a critical extension in all CA certificates that contain public keys used to validate digital signatures on certificates. This extension MAY appear as a critical or non-critical extension in CA certificates that contain public keys used exclusively for purposes other than validating digital signatures on certificates".



LuxTrust Privacy+ CA						
Base Profile	OID	Included	Critical	Value		
SignatureValue		х		Issuing LTGRCA Signature		
Validity						
NotBefore		Х		Key Generation Process Date/Time		
NotAfter		х		Key Generation Process Date/Time +up to 6 years	Fixed	
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).		
lssuer						
CountryName	{ id-at-6 }	х		LU	Fixed	
CommonName	{ id-at-3 }	Х		LuxTrust Global Root x <sup>2</sup>	Fixed	
organizationName		х		LuxTrust S.A.	Fixed	
Subject						
CountryName	{ id-at-6 }	х		LU	Fixed	
CommonName	{ id-at-3 }			LuxTrust Privacy+ CA x <sup>8</sup>	Fixed	
organizationName		Х		LuxTrust S.A.	Fixed	
CertificatePolicies	{id-ce 32}	Х	FALSE			
policyldentifier		Х		1.3.171.1.1.1.10.4	Fixed	
policyQualifiers				N/a		
policyQualifierId	{ id-qt-1 }	Х		CPS	Fixed	
Qualifier		Х		https://repository.luxtrust.lu	Fixed	
KeyUsage	{id-ce 15}	Х	TRUE <sup>7</sup>			
keyCertSign				Set	Fixed	
crlSign				Set	Fixed	
authorityKeyIdentifier	{id-ce 35}	Х	FALSE			
Keyldentifier		Х		SHA-1 Hash of Authority public key		
subjectKeyldentifier	{id-ce 14}	Х	FALSE			
Keyldentifier		х		SHA-1 Hash of Subject public key		
cRLDistributionPoints	{id-ce 31}	х	FALSE			
distributionPoint						
FullName		х		http://crl.luxtrust.lu/LTGRCAx <sup>6</sup> .crl	Fixed	
BasicConstraints	{id-ce 19}	х	TRUE <sup>7</sup>	N/a		
CA		х		TRUE	Fixed	
pathLenConstraint		х		0 (Zero)	Fixed	

 $<sup>^{8}</sup>$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.

#### 3.2.4 LuxTrust SSL CA

LuxTrust SSL CA							
Base Profile	OID	Included	Critical	Value			
Version		х		V3			
SerialNumber		х		As provided by CA or by LuxTrust S.A.			
SignatureAlgorithm							
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed		
SignatureValue		х		Issuing LTGRCA Signature			
Validity							
NotBefore		х		Key Generation Process Date/Time			
NotAfter		х		Key Generation Process Date/Time +up to 20 years	Fixed		
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001). <b>20 years certificate requires a 4096 key</b> length.			
Issuer							
CountryName	{ id-at-6 }	х		LU	Fixed		
CommonName	{ id-at-3 }	X		LuxTrust Global Root x <sup>2</sup>	Fixed		
organizationName	(	X		LuxTrust S.A.	Fixed		
Subject							
CountryName	{ id-at-6 }	Х		LU	Fixed		
CommonName	{ id-at-3 }			LuxTrust SSL CA x <sup>9</sup>	Fixed		
organizationName		х		LuxTrust S.A.	Fixed		
CertificatePolicies	{id-ce 32}	х	FALSE				
policyldentifier (1)		х		1.3.171.1.1.1.10.5	Fixed		
policyQualifiers (1)				N/a			
policyQualifierId (1)	{ id-qt-1 }	Х		CPS	Fixed		
Qualifier (1)		Х		https://repository.luxtrust.lu	Fixed		
policyldentifier (2)	{ anyPolicy }	Х		2.5.29.32.0	Fixed		
policyQualifiers (2)				N/a	1		
policyQualifierId (2)							
Qualifier (2)							
KeyUsage	{id-ce 15}	Х	TRUE <sup>7</sup>				
keyCertSign				Set	Fixed		
crlSign				Set	Fixed		
authorityKeyIdentifier	{id-ce 35}	х	FALSE				

 $<sup>^9</sup>$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.22

LuxTrust SSL CA							
Base Profile	OID	Included	Critical	Value			
Keyldentifier		х		SHA-1 Hash of Authority public key			
authorityInfoAccess <sup>10</sup>	{id-pe 1}		False				
AccessMethod	{Id-ad-1}						
accessLocation		х		http://ltgroot.ocsp.luxtrust.lu	Fixed		
AccessMethod	{Id-ad-2}		False				
accessLocation		x		http://ca.luxtrust.lu/LTGRCAx <sup>22</sup> .crt	Fixed		
subjectKeyldentifier	{id-ce 14}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Subject public key			
cRLDistributionPoints	{id-ce 31}	х	FALSE				
distributionPoint							
FullName		Х		http://crl.luxtrust.lu/LTGRCAx <sup>2</sup> .crl	Fixed		
BasicConstraints	{id-ce 19}	Х	TRUE <sup>7</sup>	N/a			
CA		Х		TRUE	Fixed		
pathLenConstraint		х		0 (Zero)	Fixed		

#### 3.2.5 LuxTrust TEST CA

	LuxTrust TEST CA							
Base Profile	OID	Included	Critical	Value				
Version		х		V3				
SerialNumber		х		As provided by CA or by LuxTrust S.A.				
SignatureAlgorithm								
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed			
SignatureValue		х		Issuing LTGRCA Signature				
Validity								
NotBefore		Х		Key Generation Process Date/Time				
NotAfter		Х		Key Generation Process Date/Time +up to 6 years	Fixed			
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).				
Issuer								
CountryName	{ id-at-6 }	х		LU	Fixed			
CommonName	{ id-at-3 }	х		LuxTrust Global Root x <sup>2</sup>	Fixed			
organizationName		х		LuxTrust S.A.	Fixed			
Subject								
CountryName	{ id-at-6 }	х		LU	Fixed			

 $<sup>^{10}</sup>$  Since LuxTrust SSL CA 4





VERSION 1.22

LuxTrust TEST CA							
Base Profile	OID	Included	Critical	Value			
CommonName	{ id-at-3 }			LuxTrust TEST CA x <sup>11</sup>	Fixed		
organizationName		х		LuxTrust S.A.	Fixed		
CertificatePolicies	{id-ce 32}	х	FALSE				
policyldentifier		х		1.3.171.1.1.1.10.6	Fixed		
policyQualifiers				N/a			
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed		
Qualifier		х		https://repository.luxtrust.lu	Fixed		
KeyUsage	{id-ce 15}	х	TRUE <sup>7</sup>				
keyCertSign				Set	Fixed		
crlSign				Set	Fixed		
authorityKeyIdentifier	{id-ce 35}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Authority public key			
subjectKeyldentifier	{id-ce 14}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Subject public key			
cRLDistributionPoints	{id-ce 31}	х	FALSE				
distributionPoint							
FullName		х		http://crl.luxtrust.lu/LTGRCA <sup>6</sup> .crl	Fixed		
BasicConstraints	{id-ce 19}	Х	TRUE <sup>7</sup>	N/A			
CA		Х		TRUE	Fixed		
pathLenConstraint		х		0 (Zero)	Fixed		

#### 3.2.6 LuxTrust Internal CA

LuxTrust Internal CA								
Base Profile	OID	Included	Critical	Value				
Version		х		V3				
SerialNumber		х		As provided by CA or by LuxTrust S.A.				
SignatureAlgorithm								
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed			
SignatureValue		х		Issuing LTGRCA Signature				
Validity								
NotBefore		х		Key Generation Process Date/Time				
NotAfter		Х		Key Generation Process Date/Time +up to 6 years	Fixed			
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).				
Issuer								

 $^{11}$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.

Page 35 de 113



VERSION 1.22

LuxTrust Internal CA							
Base Profile	OID	Included	Critical	Value			
CountryName	{ id-at-6 }	Х		LU	Fixed		
CommonName	{ id-at-3 }	Х		LuxTrust Global Root x <sup>2</sup>	Fixed		
organizationName		Х		LuxTrust S.A.	Fixed		
Subject							
CountryName	{ id-at-6 }	Х		LU	Fixed		
CommonName	{ id-at-3 }			LuxTrust Internal CA x <sup>12</sup>	Fixed		
organizationName		Х		LuxTrust S.A.	Fixed		
CertificatePolicies	{id-ce 32}	х	FALSE				
policyldentifier		х		1.3.171.1.1.10.7	Fixed		
policyQualifiers				N/a			
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed		
Qualifier		х		https://repository.luxtrust.lu	Fixed		
KeyUsage	{id-ce 15}	х	TRUE <sup>7</sup>				
keyCertSign				Set	Fixed		
crlSign				Set	Fixed		
digitalSignature				Set	Fixed		
nonRepudiation				Set	Fixed		
authorityKeyIdentifier	{id-ce 35}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Authority public key			
subjectKeyldentifier	{id-ce 14}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Subject public key			
cRLDistributionPoints	{id-ce 31}	х	FALSE				
distributionPoint							
FullName		х		http://crl.luxtrust.lu/LTGRCA <sup>6</sup> .crl	Fixed		
BasicConstraints	{id-ce 19}	х	TRUE <sup>7</sup>	N/a			
CA		х		TRUE	Fixed		
pathLenConstraint		х		0 (Zero)	Fixed		

#### 3.2.7 LuxTrust TSA (Timestamping) CA

LuxTrust Global Timestamping CA							
Base Profile	OID	Included	Critical	Value			
Version		х		V3			
SerialNumber		х		As provided by CA or by LuxTrust S.A.			
SignatureAlgorithm							

 $<sup>^{12}</sup>$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.





VERSION 1.22

	LuxTrus	t Global 1	Timestan	nping CA	
Base Profile	OID	Included	Critical	Value	
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing LTGRCA Signature	
Validity					
NotBefore		х		Key Generation Process Date/Time	
NotAfter		х		Key Generation Process Date/Time +up to 20 years	Fixed
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001). 20 years certificate requires a 4096 key length.	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x <sup>2</sup>	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust Global Timestamping CA x <sup>13</sup>	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.10.8	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier		х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE <sup>7</sup>		
keyCertSign				Set	Fixed
crlSign				Set	Fixed
authorityKeyldentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Authority public key	
authorityInfoAccess14	{id-pe 1}		False		
AccessMethod	{Id-ad-1}				
accessLocation		x		http://ltgroot.ocsp.luxtrust.lu	Fixed
AccessMethod	{Id-ad-2}		False		
accessLocation		x		http://ca.luxtrust.lu/LTGRCAx <sup>2</sup> .crt	Fixed
subjectKeyldentifier	{id-ce 14}	x	FALSE		
Keyldentifier		х		SHA-1 Hash of Subject public key	

 $^{13}$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.

<sup>14</sup> Since LuxTrust Global Timestamping CA 2

Page 37 de 113

# 

# LuxTrust Global Root CA Certificate Specifications

VERSION 1.22

	LuxTrust Global Timestamping CA									
Base Profile	OID	Included	Critical	Value						
cRLDistributionPoints	{id-ce 31}	х	FALSE							
distributionPoint										
FullName		х		http://crl.luxtrust.lu/LTGRCA <sup>6</sup> .crl	Fixed					
Basic Constraints	{id-ce 19}	Х	TRUE <sup>7</sup>	N/a						
CA		х		TRUE	Fixed					
pathLenConstraint		х		0 (Zero)	Fixed					

### 3.2.8 LuxTrust e-Government CA

	Lux	rust eGo	vernmei	nt CA	
Base Profile	OID	Included	Critical	Value	
Version		х		V3	
SerialNumber		х		As provided by CA or by LuxTrust S.A.	
SignatureAlgorithm					
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing LTGRCA Signature	
Validity					
NotBefore		х		Key Generation Process Date/Time	
NotAfter		х		Key Generation Process Date/Time +up to 6 years	Fixed
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x <sup>2</sup>	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust eGovernment CA x <sup>15</sup>	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.1.10.9	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier		х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE <sup>7</sup>		
keyCertSign				Set	Fixed

 $^{15}$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.

Page 38 de 113





VERSION 1.22

	LuxTrust eGovernment CA									
Base Profile	OID	Included	Critical	Value						
crlSign				Set	Fixed					
digitalSignature				Set	Fixed					
nonRepudiation				Set	Fixed					
authorityKeyIdentifier	{id-ce 35}	х	FALSE							
Keyldentifier		х		SHA-1 Hash of Authority public key						
subjectKeyldentifier	{id-ce 14}	х	FALSE							
Keyldentifier		х		SHA-1 Hash of Subject public key						
cRLDistributionPoints	{id-ce 31}	х	FALSE							
distributionPoint										
FullName		х		http://crl.luxtrust.lu/LTGRCA <sup>6</sup> .crl	Fixed					
BasicConstraints	{id-ce 19}	х	TRUE <sup>7</sup>	N/a						
CA		х		TRUE	Fixed					
pathLenConstraint		Х		0 (Zero)	Fixed					

### 3.2.9 Certificate extensions

X.509 v3 extensions are supported and used as indicated in the Certificates profiles as described in the present document.

### 3.2.10 Algorithm object identifiers

Algorithms OID are conforming to IETF RFC 3279 and RFC 5280.

### 3.2.11 Name forms

Name forms are in the X.500 distinguished name form as implemented in RFC 3739.

### 3.2.12 Name constraints

Name constraints are supported as per RFC 5280.

### 3.2.13 Certificate policy object identifier

Certificate policy object identifiers are used as per RFC 3739.

### 3.2.14 Usage of Policy Constraints extension

Usage of Policy Constraints extension is supported as per RFC 5280.

### 3.2.15 Policy qualifiers syntax and semantics

The use of policy qualifiers defined in RFC 5280 is supported.

### 3.3 LuxTrust End-entity – Certificates profiles

### 3.3.1 Certificate profiles

Under the new LuxTrust Global root and associated CAs, multiple types of certificates will be issued.



VERSION 1.22

For the purpose of integration with current devices such as the smartcard, the signing stick and signing server, the following five types of LuxTrust Certificates will be issued under the LuxTrust Global Qualified CA. They are respectively issued to three types of end-user devices according to the following:

- LuxTrust SSCD Smartcards: These physical user devices contain two certificates, associated to two different key pairs, according to two certificate policies
  - One LuxTrust QCP+<sup>16</sup> Qualified Certificate for Natural Persons for the purpose of creating qualified electronic signatures, under the Certificate Policy OID *1.3.171.1.10.3.1*, and
  - One LuxTrust NCP+<sup>17</sup> certificate for Natural Persons for the purpose of data/entity authentication and encryption facilities, under the Certificate Policy OID *1.3.171.1.10.3.2*.
- LuxTrust non SSCD Signing Sticks: These physical user devices that are not considered as SSCD according to [1] (e.g., SIM type chips unless they can be certified as SSCD) contain two certificates, associated to two different key pairs, according to two certificate policies
  - One LuxTrust QCP<sup>16</sup> Qualified Certificate for Natural Persons for the purpose of creating advanced electronic signatures supported by a qualified certificate, under the Certificate Policy OID *1.3.171.1.10.3.3*, and
  - One LuxTrust NCP<sup>17</sup> certificate for Natural Persons for the purpose of data/entity authentication and encryption facilities, under the Certificate Policy OID *1.3.171.1.10.3.4*.
- LuxTrust Signing Server Accounts (Virtual Smartcards): These centralised virtual user signature creation devices contain one certificate, associated to one key pair, according to one specific certificate policy
  - One LuxTrust NCP<sup>17</sup> certificate for Natural Persons for the combined purposes of electronic signature, data/entity authentication and encryption facilities, under the Certificate Policy OID *1.3.171.1.1.0.3.5*.

For the purpose of enabling Web-based data communication conduits via the TLS/SSL protocols and for verifying the authenticity of executable code, the following types of LuxTrust Certificates will be issued under the LuxTrust SSL CA:

- LuxTrust SSL/TLS Standard Server Certificates: SSL compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy 1.3.171.1.1.10.5.1.
- LuxTrust SSL/TLS Extended Validation Server Certificates EVCP: SSL compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy *1.3.171.1.1.10.5.2.*
- LuxTrust SSL/TLS Extended Validation Server Certificates EVCP+: SSL compliant ETSI TS 102 042 [4] Certificate generated on Secure User Device, under the Certificate OID Policy 1.3.171.1.1.10.5.3.
- LuxTrust Object Signing (+) Certificates: Compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy 1.3.171.1.10.5.4.
- LuxTrust SSL/TLS Client Certificates: Compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy 1.3.171.1.10.5.5.

### 3.3.2 Version number(s)

X.509 v3 is supported and used.

### 3.3.3 LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures

LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures are Qualified Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

 $<sup>^{16}</sup>$  As defined by ETSI TS 101 456 (cf. [3]).

<sup>&</sup>lt;sup>17</sup> As defined in ETSI TS 102 042 (cf. [4]).



VERSION 1.22

These LuxTrust SSCD QCP+ Certificates are compliant with and include the OID reference of the QCP+ certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.1; cf. [3]).

The usage purpose of these LuxTrust SSCD QCP+ Certificates is limited to sole authorised usage of supporting the creation of qualified electronic signatures. The LuxTrust SSCD QCP+ Certificates include the corresponding LuxTrust QCP+ OID, i.e., < OID 1.3.171.1.10.3.1>.

The following table provides the description of the fields for LuxTrust SSCD QCP+ Certificates.

	Lux	xTrust S	SCD QO	CP+ Ce	rtifica	ate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base						
Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumb	er	~	False			
					FDV	Validated on duplicates.
signatureAlg	jorithm	~	False			
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureVa	lue	~	False			
					D	Issuing CA Signature.
Issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 36
						Months
Subject		~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
						PRO and PRIVATE products: Concatenation
	commonName	~		М	D	of given name(s) and surname(s) as on IL card separated by a "Space" character.
	givenName	~		м	D	<b>PRO and PRIVATE products</b> : Given name(s, as on ID card
	sumame	~		М	D	<b>PRO and PRIVATE products</b> : Surname(s) as on ID card without indication "épouse", "ép." o similar and the subsequent name(s)
	countryName	✓		М	D	Nationality of holder (ISO3166)

 $^{18}$  IN = Included: Attribute / field included within the certificate profile.

 $<sup>^{19}</sup>$  CE = Critical Extension.

 $<sup>^{20}</sup>$  O/M: O = Optional, M = Mandatory.

 $<sup>^{21}</sup>$  CO = Content: S = Static, D = Dynamic, F = Formatted by CA, V = Validated by CA.

 $<sup>^{22}</sup>$  X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.22

	Lux	Trust SS	CD QO	CP+ Ce	rtifica	te Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	emailAddress	$\checkmark$		0	D	Subject's email address
						PRIVATE products:
						Fixed value: "Private Person"
	title	~		М	D	PRO products:
				101	D	"Professional Person" (default) or "Professional Administrator"
						(Other titles possible for special purpose certificates)
						PRO products only:
	organizationName	$\checkmark$		М	D	Name of company/institution as in articles of association or equivalent documents, including
						the legal form.
	localityName	$\checkmark$		М	D	<b>PRO products only</b> : Company/institution country of HQ (as in articles of association)
				M for PRO		PRO products:
				prod.,		Company/Institution VAT number (or if no VAT
	organizationalUnitName	~		condi-	-	number available, other unique national
	1	v		tional	D	company/institution identifier)
				(O) for		PRIVATE products:
				PRIV		If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
				prod.)		
	organizationalUnitName					PRO products only:
	2	$\checkmark$		0	D	Company/institution department or other
						information item
subjectPublic		✓ ✓	False			
	Algorithm	✓ ✓				Public Key: Key length: 2048bit (RSA); public
Extensions	subjectPublicKey			M		exponent: Fermat-4 (=010001).
Authority						
Properties						
authorityKeyl	dentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified
		$\checkmark$				CA public key
authorityInfo		✓ ✓	False			
	AccessMethod accessLocation	✓				Id-ad-2 http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				Id-ad-1
	accessLocation	$\checkmark$				http://qca.ocsp.luxtrust.lu/
cRLDistributio		~	False			
	distributionPoint	~			S	
	fullName	$\checkmark$				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl



VERSION 1.22

A (1 1)		cTrust SS	_		1	
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Subject						
Properties		√				
subjectAltNa		 ✓	False			
	Rfc822Name			0	D	Certificate Holder's email address
subjectKeylo		✓	False			
	keyldentifier				Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the leas significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, no including the length and number of unused bit string bits).
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.1
	policyQualifierID	√			S	Id-qt-1 (CPS)
	qualifier	√			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Qualified Certificate on SSCI compliant with ETSI TS 101 456 QCP- certificate policy. Key Generation by CSP. <b>Sole Authorised Usage</b> : Support of Qualifier Electronic Signature.
	PolicyIdentifier	~				0.4.0.1456.1.1
QualifiedCer	tificateStat					
	QcCompliance	√		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance with [5]
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in complianc with [5]
	QcSSCD	✓	1	М	D	0.4.0.1862.1.4 <del>Set</del>

### 3.3.4 LuxTrust SSCD NCP+ Certificates supporting Authentication & Encryption

LuxTrust SSCD NCP+ Certificates are Normalised Certificates issued on SSCD Hardware token such as LuxTrust Smartcard with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

**F**LUXTPUST

VERSION 1.22

The usage purpose of these LuxTrust SSCD NCP+ Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust SSCD NCP+ OID, i.e., **<OID 1.3.171.1.1.10.3.2>**.

The following table provides the description of the fields for the LuxTrust SSCD NCP+ Certificate type supporting Authentication and Encryption.

	Lux	xTrust \$	SSCD N	ICP+ Ce	ertifica	te Profile
Attribute	Field	<b>IN</b> <sup>18</sup>	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumber	r	~	False			
					FDV	Validated on duplicates.
signatureAlgo	prithm	~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureValu	le	~	False			
					D	Issuing CA Signature.
issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 36
						Months
subject		~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
						PRO and PRIVATE products: Concatenation
	commonName	~		М	D	of given name(s) and surname(s) as on ID
						card separated by a "Space" character
						PRO and PRIVATE products: Given name(s)
	givenName	~		М	D	as on ID card
						PRO and PRIVATE products: Surname(s) as
	surname	~		М	D	on ID card without indication "épouse", "ép." or
						similar and the subsequent name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address

Page 44 de 113



VERSION 1.22

	LuxT	rust S	SCD N	NCP+ Ce	rtifica	te Profile
Attribute	Field	<b>IN</b> 18	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
	title	~		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	*		М	D	<b>PRO products only</b> : Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	<b>PRO products only</b> : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	<i>PRO products</i> : <i>Company/Institution VAT number (or if no</i> <i>VAT number available, other unique national</i> <i>company/institution identifier)</i> <i>PRIVATE products:</i> <i>If the holder is underage: "Mineur jusqu'à : " &amp;</i> <i>(Date of birth + 18 years).</i>
	organizationalUnitName 2	~		0	D	<b>PRO products only:</b> Company/institution department or other information item
subjectPublic	KeyInfo	√	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeylo	lentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Global Qualified</b> CA public key
authorityInfoA	ccess	~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	$\checkmark$				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributio	nPoint	~	False			
	distributionPoint	~			S	
	fullName	√				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						

Page 45 de 113



VERSION 1.22

	Lux	Trust S	SSCD I	NCP+ Ce	ertifica	te Profile
Attribute	Field	<b>IN</b> 18	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
subjectAltNar	ne	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyIde	entifier	~	False			
	keyldentifier	✓ 			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	cies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.2
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	$\checkmark$			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on SSCD compliant with ETSI TS 102 042 NCP+ certificate policy. Key Generation by CSP. <b>Sole Authorised Usage</b> : Data or Entity Authentication and Data Encryption.
	PolicyIdentifier	~				0.4.0.2042.1.2

### 3.3.5 LuxTrust non SSCD QCP Certificates supporting Advanced Electronic Signatures

LuxTrust non SSCD QCP Certificates are Qualified Certificates **not** issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust non SSCD QCP Certificates are compliant with and include the OID reference of the QCP certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.2; cf. [3]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a qualified certificate. These Certificates include the corresponding LuxTrust QCP OID, i.e., < OID 1.3.171.1.10.3.3>.

The following table provides the description of the fields for LuxTrust non SSCD QCP Certificates.



VERSION 1.22

	LuxT	rust n	on SS	CD QCP	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumbe	er	~	False			
					FDV	Validated on duplicates.
signatureAlg	jorithm	~	False			
	Algorithm				s	OID = "1.2.840.113549.1.1.11" - SHA256 with RSA Encryption.
signatureVa	lue	~	False			
					D	Issuing CA Signature.
Issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 36 Months
Subject	1	~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	<b>PRO and PRIVATE products</b> : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character
	givenName	~		М	D	<b>PRO and PRIVATE products</b> : Given name(s) as on ID card
	surname	~		М	D	<b>PRO and PRIVATE products</b> : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address



VERSION 1.22

	LuxTi	rust n	on SS	CD QCP	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	Title	~		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	~		М	D	<b>PRO products only</b> : Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	<b>PRO products only</b> : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products: Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	<b>PRO products only:</b> Company/institution department or other information item
subj	jectPublicKeyInfo	~	False			
	Algorithm	✓ ✓		М		Public Key: Key length: 2048 bit (RSA); public exponent: Fermat-4 (=010001).
Extensions	<u> </u>					
Authority Pro	operties					
authorityKey	Identifier	✓	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Qualified</b> CA public key
authorityInfo	Access	✓	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/

Page 48 de 113



VERSION 1.22

A 44 11 4						ficate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
cRLDistribu	tionPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Pro	perties					
subjectAltNa	ame	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyl	dentifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field wit a 0100 value, followed by the least significant 6 bits of the SHA-1 hash of the value of subjectPublicKey bit string (tag, not including th length and number of unused bit-string bits).
Policy Prop	erties					
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	olicies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.3
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers	1				
	DisplayText	~				LuxTrust Qualified Certificate not on SSC compliant with ETSI TS 101456 QCP certificat policy.Key Generation by CSP.Sole Authorise Usage: Advanced Electronic Signatur supported by a Qualified cert
	PolicyIdentifier	~				0.4.0.1456.1.2
QualifiedCe	rtificateStat					
	QcCompliance	~		м	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance wit [5]



VERSION 1.22

	LuxTrust non SSCD QCP Certificate Profile										
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value					
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance with [5]					
	QcSSCD					NOT SET					

### 3.3.6 LuxTrust non SSCD NCP Certificates supporting Authentication & Encryption

LuxTrust non SSCD NCP Certificates are Normalised Certificates **not** issued on SSCD Hardware token with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust non SSCD NCP Certificates are compliant with and include the OID reference of the NCP certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.1; cf. [4]).

The usage purpose of these NCP Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust non SSCD NCP OID, i.e., **<OID 1.3.171.1.10.3.4>**.

The following table provides the description of the fields for the LuxTrust non SSCD NCP Authentication and Encryption Certificate type.

	LuxTrust non SSCD NCP Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
Base										
Profile										
Version		✓	False							
					S	Version 3 Value = "2"				
SerialNumb	er	~	False							
					FDV	Validated on duplicates.				
signatureAl	gorithm	~	False							
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256				
						with RSA Encryption.				
signatureVa	signatureValue		False							
					D	Issuing CA Signature.				
issuer		~	False		S					
	countryName	~			S	LU				
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>				
	organizationName	~			S	LuxTrust S.A.				
Validity		~	False							
	NotBefore	~			D	Certificate generation process date/time.				
	NotAfter	~			D	Certificate generation process date/time +				
						36 Months				
subject		~	False							
	serialNumber	~		М	D	Serial Number as constructed by LRAO				



VERSION 1.22

	LuxTrust	non S	SCD N	ICP Cer	tificat	e Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	commonName	*		М	D	<b>PRO and PRIVATE products</b> : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character
	givenName	~		М	D	<b>PRO and PRIVATE products</b> : Given name(s) as on ID card
	sumame	~		М	D	<b>PRO and PRIVATE products</b> : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address
	title	~		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	~		М	D	<b>PRO products only:</b> Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	<b>PRO products only</b> : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products: Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	<b>PRO products only</b> : Company/institution department or other information item
subjectPubli	cKeyInfo	✓	False			
	algorithm	✓ ✓				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						

Page 51 de 113



VERSION 1.22

	LuxTrust non SSCD NCP Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
Authority										
Properties										
authorityKey	/Identifier	✓	False							
	keyldentifier	~				SHA-1 Hash of the LuxTrust Qualified CA				
						public key				
authorityInfo	Access	✓	False							
	AccessMethod	✓				ld-ad-2				
	accessLocation	✓ ✓				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt				
	AccessMethod	✓ ✓				ld-ad-1				
	accessLocation	✓ ✓				http://qca.ocsp.luxtrust.lu/				
cRLDistribut	T	▼ ✓	False							
	distributionPoint	✓ ✓			S	22				
	fullName	•				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl				
Subject										
Properties		√								
subjectAltNa		▼ ✓	False							
	Rfc822Name	v		0	D	Certificate Holder's email address				
subjectKeyl		▼ ✓	False							
	keyldentifier	v			Fixed	The Key Identifier comprises a four-b				
						field with a 0100 value, followed by th				
						least significant 60 bits of the SHA-1 has				
						of the value or subjectPublicKey bit strin				
						(tag, not including the length and numbe				
						of unused bit-string bits).				
Policy										
Properties										
keyUsage		✓	True							
	digitalSignature	$\checkmark$			S	True				
	nonRepudiation				S	False				
		~				-				
	keyEncipherment				S	True				
		√			-	-				
	dataEncipherment				S	True				
certificatePo		✓	False							
Jen modier (	Policyldentifier	✓	1 0158			1.3.171.1.1.10.3.4				
	policyQualifierID	~			S	Id-qt-1 (CPS)				
	qualifier	~			S	https://repository.luxtrust.lu				
		✓			S					
	policyQualifierID				5	Id-qt-2 (User Notice)				
		✓								
	DisplayText					LuxTrust Certificate not on SSCI				
						compliant with ETSI TS 102 042 NCI				
						certificate policy. Key Generation by CSP.				
						Sole Authorised Usage: Data or Entit				
						Authentication and Data Encryption.				

Page 52 de 113

# 

LuxTrust Global Root CA Certificate Specifications

VERSION 1.22

	LuxTrust non SSCD NCP Certificate Profile								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value			
	PolicyIdentifier					0.4.0.2042.1.1			

### 3.3.7 LuxTrust Signing Server Account NCP Certificates supporting Signature, Authentication & Encryption

LuxTrust Signing Server Account NCP Certificates are Normalised Certificates **not** issued on SSCD Hardware token with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Signing Server Account NCP Certificates are compliant with and include the OID reference of the NCP certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.1; cf. [4]).

The usage purpose of these Certificates is for the combined purpose of electronic signature, authentication and encryption. These Certificates include the corresponding LuxTrust Signing Server Account NCP OID, i.e., **<OID 1.3.171.1.1.10.3.5>**.

The following table provides the description of the fields for the LuxTrust Signing Server Account NCP Signature, Authentication and Encryption Certificate type.

	LuxTrust Signing Server NCP Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
Base										
Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumb	er	~	False							
					FDV	Validated on duplicates.				
signatureAlg	porithm	~	False							
	algorithm				S	OID = "1.2.840.113549.1.1.5" - if SHA1				
						with RSA Encryption.				
						OID = "1.2.840.113549.1.1.11" - if				
						SHA256 with RSA Encryption.				
signatureVa	lue	~	False							
					D	Issuing CA Signature.				
Issuer		~	False		S					
	countryName	~			S	LU				
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>				
	organizationName	~			S	LuxTrust S.A.				
Validity		~	False							
	NotBefore	~			D	Certificate generation process date/time.				
	NotAfter	~			D	Certificate generation process date/time +				
						36 Months				
subject	·	~	False							
	serialNumber	~		М	D	Serial Number as constructed by LRAO				



VERSION 1.22

	LuxTrust Sig	gning	Serve	r NCP C	Certific	ate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	commonName	~		Μ	D	<b>PRO and PRIVATE products</b> : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character
	givenName	~		М	D	<b>PRO and PRIVATE products</b> : Given name(s) as on ID card
	sumame	~		Μ	D	<b>PRO and PRIVATE products</b> : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address
	title	~		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	~		Μ	D	<b>PRO products only</b> : Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	<b>PRO products only</b> : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	<b>PRO products</b> : Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) <b>PRIVATE products:</b> If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	<b>PRO products only</b> : Company/institution department or other information item
subjectPublic	cKeyInfo	✓	False			
	algorithm	<ul> <li>✓</li> </ul>				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						

Page 54 de 113



VERSION 1.22

	LuxTrust				1	
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Authority						
Properties						
authorityKey	/Identifier	~	False			
	keyldentifier	$\checkmark$				SHA-1 Hash of the LuxTrust Globa
						Qualified CA public key
authorityInfo	Access	~	False			
	AccessMethod	✓				Id-ad-2
	accessLocation	✓				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	✓				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistribut	tionPoint	~	False			
	distributionPoint	~			S	
	fullName	✓				http://crl.luxtrust.lu/LTGQCA <sup>22</sup> .crl
Subject						
Properties						
subjectAltNa	ame	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeylo	dentifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-b
						field with a 0100 value, followed by th
						least significant 60 bits of the SHA-1 has
						of the value or subjectPublicKey bit strin
						(tag, not including the length and number
						of unused bit-string bits).
Policy						
Properties						
keyUsage		✓	True			
	digitalSignature	~			S	True
	nonRepudiation				S	True
	key/Enginherment	✓			S	True
	keyEncipherment				3	The
	dataEncipherment	✓			S	True
certificatePo	blicies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.5
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	✓			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	✓				LuxTrust Certificate not on SSC
						compliant with ETSI TS 102 042 NC
						certificate policy. Key Generation by CSP.
						Sole Authorised Usage: Signature, Data of
						Entity Authentication and Data Encryption

Page 55 de 113



VERSION 1.22

	LuxTrust Signing Server NCP Certificate Profile								
Attribute	Attribute Field			O/M <sup>20</sup>	CO <sup>21</sup>	Value			
PolicyIdentifier		~				0.4.0.2042.1.1			

### 3.3.8 LuxTrust NCP+ Certificates supporting Mass Signature Services

LuxTrust NCP+ Certificates for Advanced Mass Signature Services are Normalised Certificates certified as generated on Secure User Device, with creation of the keys by the Subscriber, with 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Secure User Device NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a normalised certificate for Mass Signature purposes. These Certificates include the corresponding LuxTrust NCP+ OID, i.e., < OID 1.3.171.1.10.3.6>.

The following table provides the description of the fields for LuxTrust Secure User Device NCP+ Certificates.

Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumber		~	False			
					FDV	Validated on duplicates.
signatureAlgorithm		~	False			
	algorithm				S	<i>OID</i> = <i>"1.2.840.113549.1.1.11"</i>
						SHA256 with RSA Encryption
signatureValue		~	False			
					D	Issuing CA Signature.
lssuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation proces
						date/time.
	NotAfter	~			D	Certificate generation proces
						date/time + <b>36</b> Months
subject		~	False			
						Name commonly used by the subject
		~			<b>D</b>	to represent itself as stated in ETSI T
	commonName	v		М	D	119 412-3, the name should not b
						domain-shaped
						Country in which the organization
						registered office is established (a
	countryName	~		М	D	specified in the memorandum an
						articles of association). (ISO3166)

Page 56 de 113



VERSION 1.22

LuxTrust non	SSCD NCP+ Public (	Certi	ficate	Profil	e for	Mass Signature Services
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	stateOrProvinceName	~		0	D	
	emailAddress	~		0	D	Subject's email address if available
	organizationName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	localityName	~		М	D	Location in which the organization's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	organizationalUnitName 1	~		0	D	As provided by Subscriber
	organizationalUnitName 2	~		0	D	As provided by Subscriber
subjectPublicKeyInfo		~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyIdentifier		~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Global</b> Qualified CA public key
authorityInfoAccess		✓	False			
duitontymio, toooo	AccessMethod	~	1 0.00			ld-ad-2
	accessLocation	✓				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				Id-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributionPoint		✓	False			
	distributionPoint	<ul> <li>✓</li> </ul>	i aise		S	
	fullName	~			5	http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						
subjectAltName		~	False			
	Rfc822Name	~	1 0130	0	D	Certificate Holder's email address
subjectKeyIdentifier		✓	False			
	keyldentifier	~	1 0130		Fixed	The Key Identifier comprises a four-bit
						field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						
keyUsage		~	True			
Noj obugo			inde			

Page 57 de 113



VERSION 1.22

LuxTrust non	SSCD NCP+ Public (	Certi	ficate	Profil	e for	Mass Signature Services
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	digitalSignature	~			S	False
	nonRepudiation				S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePolicies		~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.6
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on Secure User Device compliant with ETSI TS 102 042 NCP+ certificate policy. Key Generation by CSP. <b>Sole Authorised Usage</b> : <i>Advanced</i> <i>electronic massive signature services</i> .
	PolicyIdentifier	✓				0.4.0.2042.1.2

### 3.3.9 LuxTrust SSCD LCP+ Integration Certificates supporting Electronic Signatures

LuxTrust SSCD LCP+ Certificates supporting Qualified Signatures are Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD LCP+ Certificates are compliant with and include the OID reference of the LCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

The usage purpose of these LuxTrust SSCD LCP+ Certificates is limited to sole authorised usage of supporting the creation of Integration electronic signatures for system integration purposes with non-repudiation signatures. The LuxTrust SSCD LCP+ Certificates include the corresponding LuxTrust OID, i.e., < OID 1.3.171.1.10.3.7>.

	LuxTrust SSCD LCP+ Integration Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
Base										
Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumbe	r	~	False							
					FDV	Validated on duplicates.				
signatureAlgo	prithm	~	False							

The following table provides the description of the fields for LuxTrust SSCD LCP Certificates.



VERSION 1.22

		1	_	-		ertificate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 wit
						RSA Encryption.
signatureVal	ue	~	False			
					D	Issuing CA Signature.
Issuer	1	~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust <b>Global Qualified</b> CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity	<u> </u>	~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 3 Months
Subject		✓	False			
	serialNumber	~		м	D	Serial Number as constructed by LRAO
			+			
	commonName	~		М	D	LGQCA XX SC PRI V3 (XX a number selecte internally by LuxTrust)
						LGQCA XX (XX a number selected internally b
	givenName	~		М	D	LuxTrust)
	surname	~		М	D	SC PRI V3
	countryName	~		М	D	LU
	emailAddress	~		0	D	N/A
	Title	~		М	D	Private Person
subjectPublic	KeyInfo	✓	False			
	Algorithm	~				Public Key: Key length: 2048bit (RSA); publi
	subjectPublicKey	√		М		exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						
authorityKey	Identifier	√	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualifie
						CA public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				ld-ad-1
	accessLocation	✓				http://qca.ocsp.luxtrust.lu/
cRLDistributi	onPoint	✓	False			
	distributionPoint	✓			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject						
Properties						
subjectAltNa	me	~	False			
	Rfc822Name	✓		0	D	N/A

Page 59 de 113



VERSION 1.22

Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
subjectKeylo	lentifier	✓	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with
						a 0100 value, followed by the least significan
						60 bits of the SHA-1 hash of the value of
						subjectPublicKey bit string (tag, not including
						the length and number of unused bit-string bits
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.7
	policyQualifierID	~			S	Id-qt-1 (CPS)
	Qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust INTEGRATION CERTIFICATE o
						SSCD compliant with ETSI TS 102 042 LCP
						certificate policy. Key Generation by CSP. Sol
						Authorised Usage: Support of Integratio
						Electronic Signature.
	PolicyIdentifier	~				0.4.0.2042.1.3
QualifiedCer	tificateStat					
	QcCompliance	~		0	S	Not Set
	QcLimitValue	~		0	D	Not Set
	QcRetentionPeriod	~		0	D	Not Set
	QcSSCD	~		М	D	OBJECT IDENTIFIER ::= { id-etsi-qcs 4 }

### 3.3.10 LuxTrust SSCD LCP+ Integration Certificates supporting Authentication & Encryption

LuxTrust SSCD LCP+ Certificates are Normalised Certificates issued on SSCD Hardware token such as LuxTrust Smartcard with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD LCP+ Certificates are compliant with and include the OID reference of the LCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

The usage purpose of these LuxTrust SSCD LCP+ Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust SSCD LCP+ OID, i.e., **<OID 1.3.171.1.10.3.8>**.

The following table provides the description of the fields for the LuxTrust SSCD LCP+ Certificate type supporting Authentication and Encryption.



VERSION 1.22

	LuxTrust	SSCD	LCP+ I	ntegra	tion Ce	ertificate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumber	•	~	False			
					FDV	Validated on duplicates.
signatureAlgo	rithm	✓	False			
<u> </u>	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureValu	e	~	False			
olghalaro raia					D	Issuing CA Signature.
Issuer		✓	False		S	
133061	countryName	✓	1 8130		S	LU
		✓				LuxTrust Global Qualified CA x <sup>22</sup>
	commonName	~			S	
	organizationName	 ✓	- ·		S	LuxTrust S.A.
Validity		· ·	False		_	
	NotBefore	· ·			D	Certificate generation process date/time.
	NotAfter	· ·			D	Certificate generation process date/time + 30
						Months
Subject	1	~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
						LGQCA XX SC PRI V3 (XX a number selected
	commonName	~		М	D	
		_				internally by LuxTrust)
	si on Nomo	~		NA		LGQCA XX (XX a number selected internally
	givenName	v		М	D	by LuxTrust)
	Surname	~		м	D	SC PRI V3
	Sumame	•		IVI		SC PRI V3
	countryName	~		М	D	LU
	emailAddress	~		0	D	N/A
	emaiiAuuress	-		0	D	
	Title	~		М	D	Private Person
subjectPublic	KeyInfo	✓	False			
•	Algorithm	✓				Public Key: Key length: 2048 bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						
authorityKeylo	dentifier	✓	False			
autiontyrteyit	keyldentifier		1 alse			SHA-1 Hash of the LuxTrust Global Qualified
	reyldentiller					
authority durf. A		✓	E a la c			CA public key
authorityInfoA			False			
	AccessMethod	· ·				Id-ad-2
	accessLocation	✓ ✓				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod					ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributio	onPoint	~	False			

Page 61 de 113



VERSION 1.22

	LuxTrust	SSCD I	LCP+ 1	ntegra	tion Ce	ertificate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject						
Properties						
subjectAltNar	ne	✓	False			
	Rfc822Name	✓		0	D	N/A
subjectKeyId	entifier	✓	False			
	keyldentifier	$\checkmark$			Fixed	The Key Identifier comprises a four-bit field with
						a 0100 value, followed by the least significant
						60 bits of the SHA-1 hash of the value or
						subjectPublicKey bit string (tag, not including
						the length and number of unused bit-string
						bits).
Policy						
Properties						
keyUsage			True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	cies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.8
	policyQualifierID	~			S	Id-qt-1 (CPS)
	Qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust INTEGRATION CERTIFICATE on
						SSCD compliant with ETSI TS 102 042 LCP+
		1				certificate policy. Key Generation by CSP. Sole
		1				Authorised Usage: Authentication and
						Encryption for Integration Purposes.
	PolicyIdentifier	~				0.4.0.2042.1.3

### 3.3.11 LuxTrust Signing Server Account LCP Certificates supporting Signature, Authentication & Encryption for integration purposes

LuxTrust Signing Server Account NCP Certificates are Normalised Certificates **not** issued on SSCD Hardware token with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Signing Server Account LCP Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

The usage purpose of these Certificates is for the combined purpose of electronic signature, authentication and encryption. These Certificates include the corresponding LuxTrust Signing Server Account OID, i.e., **<OID 1.3.171.1.10.3.9>**.



VERSION 1.22

The following table provides the description of the fields for the LuxTrust Signing Server Account LCP Signature, Authentication and Encryption Certificate type.

LuxTrust Signing Server LCP Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value			
Base									
Profile									
Version	Γ	~	False						
					S	Version 3 Value = "2"			
SerialNumbe	ər	~	False						
		~			FDV	Validated on duplicates.			
signatureAlg		v	False						
	Algorithm				S	OID = "1.2.840.113549.1.1.5" – if SHA1			
						with RSA Encryption.			
						OID = "1.2.840.113549.1.1.11" - if			
		✓	<b>-</b> .			SHA256 with RSA Encryption.			
signatureVal			False						
leauer		✓	False		D	Issuing CA Signature.			
Issuer		✓ ✓	False		S	LU			
	countryName	✓			S	LuxTrust Global Qualified CA x <sup>22</sup>			
		✓ <b>√</b>			S				
\ / - I' - I' - I'	organizationName	✓	E al a a		S	LuxTrust S.A.			
Validity	NetDefere	✓ ✓	False						
	NotBefore	✓			D	Certificate generation process date/time.			
	NotAfter				D	Certificate generation process date/time + 36 Months			
Subject	1	~	False						
	serialNumber	~		Μ	D	Serial Number as constructed by LRAO			
	commonName	~		М	D	LGQCA XX CSS (XX a number selected internally by LuxTrust)			
	givenName	~		М	D	LGQCA XX (XX a number selected internally by LuxTrust)			
	Surname	~		М	D	CSS			
	countryName	~		М	D	LU			
	emailAddress	~		0	D	N/A			
	Title	~		М	D	Private Person			
subjectPubli	cKeyInfo	~	False						
	Algorithm	~				Public Key: Key length: 2048 bit (RSA)			
	subjectPublicKey	$\checkmark$		М		public exponent: Fermat-4 (=010001).			
Extensions									
Authority									
Properties authorityKey		√							



VERSION 1.22

Attribute	Field	t Signing	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Allibule	keyldentifier	· · · · · · · · · · · · · · · · · · ·	OL.	0/141-5	00-	SHA-1 Hash of the LuxTrust Globa
	Reyidentiller					Qualified CA public key
authorityInfo	Access	√	False			
autiontyniic	AccessMethod	√	1 0150			ld-ad-2
	accessLocation	✓				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	√				Id-ad-1
	accessLocation	✓				http://gca.ocsp.luxtrust.lu/
cRLDistribut		√	False			
	distributionPoint	√			S	
	fullName	√			-	http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject						
Properties						
subjectAltNa	ame	✓	False			
	Rfc822Name	~		0	D	N/A
subjectKeyle	dentifier	√	False			
	keyldentifier	√			Fixed	The Key Identifier comprises a four-b
						field with a 0100 value, followed by th
						least significant 60 bits of the SHA-1 has
						of the value or subjectPublicKey bit strin
						(tag, not including the length and number
						of unused bit-string bits).
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	$\checkmark$			S	True
	nonRepudiation				S	True
	keyEncipherment	$\checkmark$			S	True
	dataEncipherment	$\checkmark$			S	True
certificatePo		✓	False			
	PolicyIdentifier	✓				1.3.171.1.1.10.3.9
	policyQualifierID	✓			S	Id-qt-1 (CPS)
	Qualifier	<b>√</b>			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				INTEGRATION Certificate not on SSC
						compliant with ETSI TS 102 042 LC
						cert.policy. Key Generation by CSP. Sol
						Authorised Usage: Signature, Data of
						Entity Auth. and Data Enc. for integration
						purposes
	PolicyIdentifier	~				0.4.0.2042.1.3

Page 64 de 113



VERSION 1.22

### 3.3.12 LuxTrust Smartcard LORA Certificates supporting Signature for LRAO purposes

LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures are Qualified Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD QCP+ Certificates are compliant with and include the OID reference of the QCP+ certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.1; cf. [3]).

The usage purpose of these LuxTrust SSCD QCP+ Certificates is limited to sole authorised usage of supporting the creation of qualified electronic signatures for LRAO purposes. The LuxTrust SSCD QCP+ Certificates include the corresponding LuxTrust QCP+ OID, i.e., < OID 1.3.171.1.1.10.3.10>.

The following table provides the description of the fields for LuxTrust SSCD LORA QCP+ Certificate Profile.

	LuxT	rust SSCD	LORA	QCP+	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base						
Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumb	er	✓	False			
					FDV	Validated on duplicates.
signatureAlg	porithm	~	False			
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureVa	lue	~	False			
					D	Issuing CA Signature.
Issuer	1	~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	$\checkmark$			D	Certificate generation process date/time + 3
						Months
Subject		$\checkmark$	False			
	serialNumber	$\checkmark$		М	D	Serial Number as constructed by LRAO
						Concatenation of given name(s) and
	commonName	$\checkmark$		М	D	surname(s) as on ID card separated by
						"Space" character.
	givenName	~		М	D	Given name(s) as on ID card
						Surname(s) as on ID card without indicatio
	Surname	$\checkmark$		м	D	"épouse", "ép." or similar and the subsequer
						name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	✓	1	0	D	Subject's email address

Page 65 de 113



VERSION 1.22

	LuxTru	st SSCD	LORA	OCP+	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	Title	✓		M	D	"LuxTrust RA Officer"
	organizationName	✓		м	D	Constructed by LuxTrust
	localityName	✓		м	D	Country of RA
	organizationalUnitName 1	✓		М	D	RA code Constructed by LuxTrust
	organizationalUnitName 2	✓		М	D	RAO code Constructed by LuxTrust
subjectPublic	KeyInfo	✓	False			
	Algorithm	✓				Public Key: Key length: 2048bit (RSA); public
	subjectPublicKey	$\checkmark$		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKey	Identifier	✓	False			
	keyldentifier	$\checkmark$				SHA-1 Hash of the LuxTrust <b>Global Qualified</b> CA public key
authorityInfo	Access	$\checkmark$	False			
	AccessMethod	$\checkmark$				ld-ad-2
	accessLocation	$\checkmark$				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	$\checkmark$				ld-ad-1
	accessLocation	$\checkmark$				http://qca.ocsp.luxtrust.lu/
cRLDistributi	onPoint	$\checkmark$	False			
	distributionPoint	$\checkmark$			S	
	fullName	✓				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						
subjectAltNa	me	$\checkmark$	False			
	Rfc822Name	$\checkmark$		0	D	Certificate Holder's email address
subjectKeyld	entifier	$\checkmark$	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy						
Properties		✓	Truce			
keyUsage	digitalSignature	· · ·	True		<u> </u>	Falsa
	digitalSignature	~			S	False
	nonRepudiation	✓			S	True
	keyEncipherment	· ✓			S	False
	dataEncipherment	*			S	False



VERSION 1.22

	LuxTr	ust SSCD	LORA	QCP+	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
certificatePo	blicies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.10
	policyQualifierID	~			S	Id-qt-1 (CPS)
	Qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Qualified Certificate on SSCD
						compliant with ETSI TS 101 456 QCP+
						certificate policy. Key Generation by CSP.
						Sole Authorised Usage: Support of Qualified
						Electronic Signature for LRAO purposes
	PolicyIdentifier	~				0.4.0.1456.1.1
QualifiedCe	rtificateStat					
	QcCompliance	~		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance
						with [5]
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance
						with [5]
	QcSSCD	~		М	D	OBJECT IDENTIFIER ::= { id-etsi-qcs 4 }

### 3.3.13 LuxTrust Smartcard LORA Certificates supporting Authentication & Encryption for LRAO purposes

LuxTrust SSCD NCP+ Certificates are Normalised Certificates issued on SSCD Hardware token such as LuxTrust Smartcard with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these LuxTrust SSCD NCP+ Certificates is for the combined purpose of authentication and encryption for LRAO purposes. These Certificates include the corresponding LuxTrust SSCD NCP+ OID, i.e., **<OID 1.3.171.1.10.3.11>**.

The following table provides the description of the fields for the LuxTrust SSCD LORA NCP+ Certificate Profile type supporting Authentication and Encryption.

	LuxTrust SSCD LORA NCP+ Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
Base Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumber		~	False							
					FDV	Validated on duplicates.				
signatureAlgo	rithm	~	False							
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with				
						RSA Encryption.				

Page 67 de 113



VERSION 1.22

	LuxTrus	t SSC	D LOR	A NCP+	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
signatureValu	e	√	False			
					D	Issuing CA Signature.
lssuer		~	False		S	
	countryName	~			S	LU
	commonName	<b>√</b>			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	✓			S	LuxTrust S.A.
Validity		✓	False			
	NotBefore	× ×			D	Certificate generation process date/time.
	NotAfter	v			D	Certificate generation process date/time + 36 Months
Subject		~	False			
	serialNumber	✓		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character
	givenName	~		М	D	Given name(s) as on ID card
	Sumame	V		М	D	Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequen name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	$\checkmark$		0	D	Subject's email address
	Title	~		М	D	"LuxTrust RA Officer"
	organizationName	✓		М	D	Constructed by LuxTrust
	localityName	$\checkmark$		М	D	Country of RA
	organizationalUnitName 1	~		М	D	RA code Constructed by LuxTrust
	organizationalUnitName 2	~		М	D	RAO code Constructed by LuxTrust
subjectPublicKeyInfo		<b>√</b>	False			
	Algorithm	✓				Public Key: Key length: 2048 bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyIdentifier		~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Global Qualified</b> CA public key
authorityInfoA	ACCESS	√	False			
	AccessMethod	~				Id-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt

Page 68 de 113



VERSION 1.22

	LuxTru	ist SSC	D LOR	A NCP+	Certif	icate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributio	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject						
Properties						
subjectAltNar	ne	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyId	entifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field
						with a 0100 value, followed by the least
						significant 60 bits of the SHA-1 hash of the
						value or subjectPublicKey bit string (tag, not
						including the length and number of unused
						bit-string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	cies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.11
	policyQualifierID	~			S	Id-qt-1 (CPS)
	Qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on SSCD compliant with
		1				ETSI TS 102 042 NCP+ certificate policy. Key
		1				Generation by CSP.
		1				Sole Authorised Usage: Data or Entity
		1				Authentication and Data Encryption for LRAO
		1				purposes.
	PolicyIdentifier	✓			1	0.4.0.2042.1.2

# 3.3.14 LuxTrust non SSCD Mass LRAO QCP Certificates supporting Advanced Electronic Signatures

LuxTrust non SSCD QCP Certificates are Qualified Certificates **not** issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with 2048-bit key size and 3 years validity from issuing start date.



VERSION 1.22

These LuxTrust non SSCD QCP Certificates are compliant with and include the OID reference of the QCP certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.2; cf. [3]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a qualified certificate for Mass LRAO Signature purposes. These Certificates include the corresponding LuxTrust QCP OID, i.e., < OID 1.3.171.1.10.3.12>.

The following table provides the description of the fields for LuxTrust non SSCD QCP Certificates.

LuxTrust non SSCD QCP Mass LRAO Signatures Certificate Profile							
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value	
Base Profile							
Version		~	False				
					S	Version 3 Value = "2"	
SerialNumbe	r	~	False				
					FDV	Validated on duplicates.	
signatureAlg	orithm	~	False				
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with RSA Encryption.	
signatureVal	ue	~	False				
					D	Issuing CA Signature.	
Issuer		~	False		S		
	countryName	~			S	LU	
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>	
	organizationName	~			S	LuxTrust S.A.	
Validity		~	False				
	NotBefore	~			D	Certificate generation process date/time.	
	NotAfter	~			D	Certificate generation process date/time + <b>36</b> Months	
Subject		~	False				
	serialNumber	~		М	D	Serial Number as constructed by LRAO	
	commonName	~		М	D	Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character	
	givenName	~		М	D	Given name(s) as on ID card	
	Sumame	~		М	D	Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)	
	countryName	~		М	D	Nationality of holder (ISO3166)	
	emailAddress	~		0	D	Subject's email address	

Page 70 de 113



VERSION 1.22

	LuxTrust non SSC	D QC	P Mas	s LRAO	Signa	tures Certificate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	Title	~		М	D	"LuxTrust RA officer – LRS"
	organizationName	~		М	D	"RA" & RA number & " – " & Name of the LuxTrust RA
	localityName	~		М	D	Country of RA (as in articles of association)
	organizationalUnitName 1	~		М	D	RA code Constructed by LuxTrust
	organizationalUnitName 2	~		О	D	RAO code Constructed by LuxTrust
subj	ectPublicKeyInfo	~	False			
	Algorithm	~				Public Key: Key length: 2048 bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Pro	Authority Properties					
authorityKeyIdentifier		~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfoA	authorityInfoAccess		False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributio	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Prop	erties					
subjectAltNar	ne	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyIdentifier		~	False			
	keyldentifier	V			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						

Page 71 de 113



VERSION 1.22

	LuxTrust non SS	CD QC	CP Mas	s LRAO	Signa	tures Certificate Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	certificatePolicies		False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.12
	policyQualifierID	~			S	Id-qt-1 (CPS)
	Qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Qualified Certificate not SSCD compliant with ETSI TS101456 QCP certificate policy.Key Generation by CSP.Sole Authorised Usage: Support of Advanced Electronic Signature for Mass LRAO purposes
	PolicyIdentifier	~				0.4.0.1456.1.2
QualifiedCe	rtificateStat					
	QcCompliance	~		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance with [5]
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance with [5]
	QcSSCD	~				NOT SET

### 3.3.15 LuxTrust eID SSCD QCP+ Certificates supporting Qualified Signatures

LuxTrust eID SSCD QCP+ Certificates supporting Qualified Signatures are Qualified Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the eID certificate life cycle procedure, with a 2048-bit key size and 61 months validity from issuing start date or 1 day validity from issuing start date for pseudonym certificate

These LuxTrust SSCD QCP+ Certificates are compliant with and include the OID reference of the QCP+ certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.1; cf. [3]).

The usage purpose of these LuxTrust SSCD QCP+ Certificates is limited to sole authorised usage of supporting the creation of qualified electronic signatures. The LuxTrust SSCD QCP+ Certificates include the corresponding LuxTrust QCP+ OID, i.e., < OID 1.3.171.1.10.3.13>.

LuxTrust Global Root CA Certificate Specifications

VERSION 1.22

According to the Luxembourg legislation, the eID card must always contain certificates. When ordering an eID card, the citizen has the choice to request or not the activation of his certificates. In case he has chosen not to activate his certificates, LuxTrust is not allowed to detain the personal citizen data according to the personal data protection and management of the national register law. Therefore, when a citizen does not want to activate and use his certificates:

- 1. Pseudonym certificates are issued due to the laws on data protection and national register
- 2. The Given name and the Surname are encrypted alphanumeric strings
- 3. The pseudonym certificates are immediately revoked as the citizen will not use his certificates

The certificate re-key is not allowed.

The following table provides the description of the fields for LuxTrust SSCD QCP+ Certificates.

	LuxTri	ust eID S	SCD Q	CP+ C	ertific	ate Profile
Attribute	Field	IN <sup>23</sup>	CE <sup>24</sup>	O/M <sup>25</sup>	CO <sup>26</sup>	Value
Base						
Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumbe	r	~	False			
					FDV	Validated on duplicates.
signatureAlg	orithm	✓	False			
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureVal	ue	✓	False			
					D	Issuing CA Signature.
Issuer		✓	False		S	
	countryName	$\checkmark$			S	LU
	commonName	✓			S	LuxTrust Global Qualified CA x <sup>27</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time +
						maximum 120 Months;
						Certificate generation process date/time + 1
						day for PSEUDONYM Certificate
Subject		✓	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	Concatenation of given name(s) and surname(s) separated by the space character
	givenName	~		М	D	<i>Given name(s) as on ID card or as provided by</i> <i>the RNCID</i>

 $<sup>^{23}</sup>$  IN = Included: Attribute / field included within the certificate profile.

 $<sup>^{24}</sup>$  CE = Critical Extension.

 $<sup>^{25}</sup>$  O/M: O = Optional, M = Mandatory.

 $<sup>^{26}</sup>$  CO = Content: S = Static, D = Dynamic, F = Formatted by CA, V = Validated by CA.

<sup>&</sup>lt;sup>27</sup> X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



	LuxTru	st eID S	scd Q	CP+ Ce	ertific	ate Profile
Attribute	Field	IN <sup>23</sup>	CE <sup>24</sup>	O/M <sup>25</sup>	CO <sup>26</sup>	Value
	Surname	~		М	D	Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequen name(s) or as provided by the RNCID
	countryName	~		М	D	LU
	emailAddress	~		0	D	Subject's email address
	Title	~		М	D	"Private Person"
	organizationalUnitName 1	~		о	D	If the holder is underage: "Mineur jusqu'à : " d (Date of birth + 18 years).
subjectPublic	KeyInfo	~	False			
	Algorithm	~				Public Key: Key length: 2048bit up to 4096bi
	subjectPublicKey	~		М		(RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyl	dentifier	✓	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Global Qualifie</b> CA x public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributi	onPoint	✓	False			
	distributionPoint	✓			S	
	fullName	✓				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						
subjectAltNa	me	~	False			
	Rfc822Name	~		0	D	Subject email address
subjectKeyld	entifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the leas significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, no including the length and number of unused bit string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~	1		S	False
	dataEncipherment	✓	1		S	False



VERSION 1.22

	LuxTi	ust eID S	SCD Q	CP+ C	ertific	ate Profile
Attribute	Field	IN <sup>23</sup>	CE <sup>24</sup>	O/M <sup>25</sup>	CO <sup>26</sup>	Value
certificatePo	licies	~	False			
	PolicyIdentifier	✓				1.3.171.1.1.10.3.13
	policyQualifierID	~			S	ld-qt-1 (CPS)
	Qualifier	✓			S	https://repository.luxtrust.lu
	policyQualifierID	✓			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText					LuxTrust Qualified Certificate on SSCD compliant with ETSI TS 101 456 QCP+ certificate policy. Key Generation by CSP. <b>Sole Authorised Usage</b> : Support of Qualified Electronic Signature.
	PolicyIdentifier	~				0.4.0.1456.1.1
QualifiedCe	tificateStat					
	QcCompliance	✓		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance with [5]
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance with [5]
	QcSSCD	~		М	D	OBJECT IDENTIFIER ::= { id-etsi-qcs 4 }

#### 3.3.16 LuxTrust eID SSCD NCP+ Certificates supporting Authentication & Encryption

LuxTrust SSCD NCP+ Certificates are Normalised Certificates issued on SSCD Hardware with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the eID certificate life cycle procedure, with a 2048-bit key size and 61 months validity from issuing start date or 1 day validity from issuing start date for pseudonym certificate.

These LuxTrust SSCD NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these LuxTrust SSCD NCP+ Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust SSCD NCP+ OID, i.e., **<OID 1.3.171.1.1.10.3.14>**.

According to the Luxembourg legislation, the eID card must always contain certificates. When ordering an eID card, the citizen has the choice to request or not the activation of his certificates. In case he has chosen not to activate his certificates, LuxTrust is not allowed to detain the personal citizen data according to the personal data protection and management of the national register law. Therefore, when a citizen does not want to activate and use his certificates:

- 1. Pseudonym certificates are issued due to the laws on data protection and national register
- 2. The Given name and the Surname are encrypted alphanumeric strings
- 3. The pseudonym certificates are immediately revoked as the citizen will not use his certificates

The certificate re-key is not allowed.

The following table provides the description of the fields for the LuxTrust SSCD NCP+ Certificate type supporting Authentication and Encryption.



VERSION 1.22

	LuxTr		1			
Attribute	Field	<b>IN</b> <sup>18</sup>	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
Base Profile		✓				
Version	Г	v	False			
		✓			S	Version 3 Value = "2"
SerialNumber		~	False			
		✓			FDV	Validated on duplicates.
signatureAlgo		v	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 wit
						RSA Encryption.
signatureValu	<b>e</b>	~	False			
					D	Issuing CA Signature.
issuer	I	<ul> <li>✓</li> </ul>	False		S	
	countryName	<ul> <li>✓</li> </ul>			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	<ul> <li>✓</li> </ul>			S	LuxTrust S.A.
Validity		✓	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time
						maximum 120 Months;
						Certificate generation process date/time +
						day for PSEUDONYM Certificate
subject	1	~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	Concatenation of given name(s) an
						surname(s) separated by the space character
	at an Maria	~				Given name(s) as on ID card or as provide
	givenName	v		М	D	by the RNCID
						Surname(s) as on ID card without indicatio
	surname	~		м	D	"épouse", "ép." or similar and the subsequer
	Sumame	·		IVI	D	name(s) or as provided by the RNCID
	countryName	~		М	D	LU
	emailAddress	~		0	D	Subject's email address
	title	~		М	D	"Private Person"
	organizationalUnitName 1	~		0	D	If the holder is underage: "Mineur jusqu'à : "
subjectPublic	Kevinfo	~	False			(Date of birth + 18 years).
Subject upilCi	algorithm	✓	1 0130			Public Key: Key length: 2048 bit up to 4096b
		√		М		(RSA); public exponent: Fermat-4 (=010001).
Extensions	subjectPublicKey			IVI		
Authority Properties						
authorityKeylo	dentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualifier
	-					CA x public key

Page 76 de 113



VERSION 1.22

	Lux	Trust S	SCD NO	CP+ Cei	tificat	e Profile
Attribute	Field	<b>IN</b> <sup>18</sup>	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
authorityInfoA	ccess	~	False			
	AccessMethod	~				Id-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	$\checkmark$				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributio	nPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						
subjectAltNam	ne	✓	False			
	Rfc822Name	~		0	D	Subject email address
subjectKeyIde		✓	False	-	_	
	keyldentifier				Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the leas significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, no including the length and number of unused bit-string bits).
Policy Properties						
keyUsage	L	~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePolic	cies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.14
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on SSCD compliant with ETSI TS 102 042 NCP+ certificate policy. Ke Generation by CSP. <b>Sole Authorised Usage</b> : Data or Entit
						Authentication and Data Encryption.

### 3.3.17 LuxTrust eID SSCD LCP+ Certificates supporting Qualified Signatures

LuxTrust eID SSCD LCP+ Certificates are Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the eID certificate life cycle procedure, with a 2048-bit key size and 12 months validity from issuing start date or 1 day validity from issuing start date for pseudonym certificate.

Page 77 de 113

VERSION 1.22

These LuxTrust SSCD LCP+ Certificates are compliant with and include the OID reference of the LCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

The usage purpose of these LuxTrust SSCD LCP+ Certificates is limited to sole authorised usage of supporting the creation of Integration electronic signatures for system integration purposes with non-repudiation signatures. The LuxTrust SSCD LCP+ Certificates include the corresponding LuxTrust LCP+ OID, i.e., < OID 1.3.171.1.10.3.16>.

According to the Luxembourg legislation, the eID card must always contain certificates. When ordering an eID card, the citizen has the choice to request or not the activation of his certificates. In case he has chosen not to activate his certificates, LuxTrust is not allowed to detain the personal citizen data according to the personal data protection and management of the national register law. Therefore, when a citizen does not want to activate and use his certificates:

- 1. Pseudonym certificates are issued due to the laws on data protection and national register
- 2. The Given name and the Surname are encrypted alphanumeric strings
- 3. The pseudonym certificates are immediately revoked as the citizen will not use his certificates

The certificate re-key is not allowed.

The following table provides the description of the fields for LuxTrust SSCD LCP+ Certificates.

	LuxTrust eID S	SCD LCP I	ntegra	tion Si	gnatı	re Certificate Profile
Attribute	Field	IN <sup>28</sup>	<b>CE</b> <sup>29</sup>	<b>O/M</b> <sup>30</sup>	<b>CO</b> <sup>31</sup>	Value
Base						
Profile						
Version		✓	False			
					S	Version 3 Value = "2"
SerialNumb	er	~	False			
					FDV	Validated on duplicates.
signatureAlg	jorithm	~	False			
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureVa	signatureValue		False			
					D	Issuing CA Signature.
Issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>32</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 12
						Months;
						Certificate generation process date/time + 1
						day for PSEUDONYM Certificate
Subject		~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO

 $<sup>^{28}</sup>$  IN = Included: Attribute / field included within the certificate profile.

 $<sup>^{29}\,\</sup>mathrm{CE}$  = Critical Extension.

 $<sup>^{30}</sup>$  O/M: O = Optional, M = Mandatory.

 $<sup>^{31}</sup>$  CO = Content: S = Static, D = Dynamic, F = Formatted by CA, V = Validated by CA.

<sup>32</sup> X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



	LuxTrust eID SSC	D LCP I	ntegra		gnatı	re Certificate Profile
Attribute	Field	IN <sup>28</sup>	<b>CE</b> <sup>29</sup>	<b>O/M</b> <sup>30</sup>	<b>CO</b> <sup>31</sup>	Value
	commonName	~		М	D	Concatenation of given name(s) and surname(s) separated by the space character
	givenName	~		М	D	specimen-x provided by the RNCID
	surname	✓		М	D	specimen-x as provided by the RNCID
	countryName	~		М	D	LU
	emailAddress	~		0	D	specimen-x Subject's email address as provided by the RNCID
	title	✓		М	D	"Private Person"
	organizationalUnitName 1	~		о	D	If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
subjectPublic	KeyInfo	~	False			
	Algorithm	~				Public Key: Key length: 2048bit up to 4096bit
	subjectPublicKey	~		М		(RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyl	Identifier	√	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Global Qualified</b> CA x public key
authorityInfo	Access	✓	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	✓				ld-ad-1
	accessLocation	✓				http://qca.ocsp.luxtrust.lu/
cRLDistributi	onPoint	✓	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						
subjectAltNa	me	√	False			
Subject-tille	Rfc822Name	~	1 8130	0	D	specimen-x Subject's email address as provided by the RNCID
subjectKeyId	lentifier	~	False			
	keyldentifier	Ý			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit- string bits).
Policy Properties						
keyUsage		~	True			
,	digitalSignature	✓			S	False



VERSION 1.22

	LuxTrust eID SS	CD LCP I	ntegra	tion Si	ignatı	re Certificate Profile
Attribute	Field	IN <sup>28</sup>	<b>CE</b> <sup>29</sup>	<b>O/M</b> <sup>30</sup>	<b>CO</b> <sup>31</sup>	Value
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.16
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust INTEGRATION CERTIFICATE on
						eID SSCD compliant with ETSI TS 102 042
						LCP certificate policy. Key Generation by CSP.
						Sole Authorised Usage: Electronic signature
						for Integration Purposes.
	PolicyIdentifier	~				0.4.0.1456.1.1
QualifiedCer	tificateStat					
	QcCompliance	~		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance
						with [5]
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance
						with [5]
	QcSSCD	~		М	D	OBJECT IDENTIFIER ::= { id-etsi-qcs 4 }

### 3.3.18 LuxTrust eID SSCD LCP+ Certificates supporting Authentication & Encryption

LuxTrust SSCD LCP+ Certificates are Certificates issued on SSCD Hardware with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the eID certificate life cycle procedure, with a 2048bit key size and 12 months validity from issuing start date or 1 day validity from issuing start date for pseudonym certificate.

These LuxTrust SSCD LCP+ Certificates are compliant with and include the OID reference of the LCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these LuxTrust SSCD LCP+ Certificates is for the combined purpose of authentication and encryption for system integration. These Certificates include the corresponding LuxTrust SSCD LCP+ OID, i.e., **<OID 1.3.171.1.10.3.17>**.

According to the Luxembourg legislation, the eID card must always contain certificates. When ordering an eID card, the citizen has the choice to request or not the activation of his certificates. In case he has chosen not to activate his certificates, LuxTrust is not allowed to detain the personal citizen data according to the personal data protection and management of the national register law. Therefore, when a citizen does not want to activate and use his certificates:

- 1. Pseudonym certificates are issued due to the laws on data protection and national register
- 2. The Given name and the Surname are encrypted alphanumeric strings
- 3. The pseudonym certificates are immediately revoked as the citizen will not use his certificates

The certificate re-key is not allowed.



VERSION 1.22

The following table provides the description of the fields for the LuxTrust SSCD LCP+ Certificate type supporting Authentication and Encryption.

	LuxTrust eID	SSCD	LCP I	ntgratior	n AE C	Certificate Profile
Attribute	Field	IN <sup>18</sup>	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
Base Profile						
Version		✓	False			
					S	Version 3 Value = "2"
SerialNumber	•	~	False			
					FDV	Validated on duplicates.
signatureAlgo	rithm	~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureValu	e	√	False			
					D	Issuing CA Signature.
issuer	•	~	False		S	
	countryName	✓			S	LU
	commonName	✓			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	✓			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	√			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 12
						Months;
						Certificate generation process date/time +
						day for PSEUDONYM Certificate
subject		✓	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	Concatenation of given name(s) and
					D	surname(s) separated by the space charact
	givenName	~		м	D	specimen-x provided by the RNCID
	surname	~		М	D	specimen-x provided by the RNCID
	countryName	~		М	D	LU
	emailAddress	~		О	D	specimen-x Subject's email address a provided by the RNCID
	title	~		М	D	"Private Person"
	organizationalUnitName 1	~		0	D	If the holder is underage: "Mineur jusqu'à : " o (Date of birth + 18 years).
subjectPublic	KeyInfo	~	False			
,	algorithm	~				Public Key: Key length: 2048 bit up to 4096bi
	subjectPublicKey	✓		М		(RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						
authorityKeylo	dentifier	~	False			



						Certificate Profile
Attribute	Field	<b>IN</b> <sup>18</sup>	<b>CE</b> <sup>19</sup>	<b>O/M</b> <sup>20</sup>	<b>CO</b> <sup>21</sup>	Value
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified
						CA x public key
authorityInfoAccess		~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://qca.ocsp.luxtrust.lu/
cRLDistributio	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject						
Properties						
subjectAltNar	me	~	False			
	Rfc822Name	~		0	D	specimen-x Subject's email address a
						provided by the RNCID
subjectKeyId	entifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit fiel
						with a 0100 value, followed by the least
						significant 60 bits of the SHA-1 hash of the
						value or subjectPublicKey bit string (tag, ne
						including the length and number of unuse
						bit-string bits).
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	icies	✓	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.17
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	✓				LuxTrust INTEGRATION CERTIFICATE o
						eID SSCD compliant with ETSI TS 102 04
						LCP certificate policy. Key Generation b
						CSP. Sole Authorised Usage: Authentication
						and Encryption for Integration Purposes
		1	1		1	and Encryption for integration Fulposes



VERSION 1.22

#### 3.3.19 LuxTrust NCP+ Certificates supporting SEAL Signature Services

LuxTrust NCP+ Certificates for Advanced Seal Signature Services are Normalised Certificates certified as generated on Secure User Device, with creation of the keys by the Subscriber and LuxTrust, with 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Secure User Device NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a normalised certificate for Seal Signature purposes. These Certificates include the corresponding LuxTrust NCP+ OID, i.e., < OID 1.3.171.1.10.3.15>.

The following table provides the description of the fields for LuxTrust Secure User Device NCP+ Certificates.

Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base Profile						
Version		✓	False			
					S	Version 3 Value = "2"
SerialNumber		~	False			
					FDV	Validated on duplicates.
signatureAlgorithm		~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" -
						SHA256 with RSA Encryption
signatureValue		~	False			
					D	Issuing CA Signature.
lssuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process
						date/time.
	NotAfter	~			D	Certificate generation process
						date/time + <b>36</b> Months
subject	-	~	False			
						Name commonly used by the subject
	commonName	✓		м	D	to represent itself as stated in ETSI TS
	commonivame	·		IVI	D	119 412-3, the name should not be
						domain-shaped
						Country in which the organization's
						registered office is established (as
	countryName	~		М	D	specified in the memorandum and
						, articles of association). (ISO3166)
	atata OrDrauda a Nicros	✓				
	stateOrProvinceName	Ý		0	D	
	emailAddress	✓		0	D	Subject's email address if available



LuxTrust non	SSCD NCP+ Public	Certi	ficate	Profil	e for	Mass Signature Services
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	organizationName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	localityName	*		М	D	Location in which the organization's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	organizationalUnitName 1	~		0	D	As provided by Subscriber
	organizationalUnitName 2	~		О	D	As provided by Subscriber
subjectPublicKeyInfo		~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyIdentifier		~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>Global</b> <b>Qualified</b> CA public key
authorityInfoAccess	1	✓	False			
	AccessMethod	✓				ld-ad-2
	accessLocation	<ul> <li>✓</li> </ul>				http://ca.luxtrust.lu/LTGQCAx <sup>22</sup> .crt
	AccessMethod	✓				ld-ad-1
	accessLocation	✓				http://qca.ocsp.luxtrust.lu/
cRLDistributionPoint		~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx <sup>22</sup> .crl
Subject Properties						
subjectAltName	-	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyIdentifier	-	~	False			
	keyldentifier	✓			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	True



VERSION 1.22

LuxTrust non SSCD NCP+ Public Certificate Profile for Mass Signature Services								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value		
	keyEncipherment	~			S	False		
	dataEncipherment	~			S	False		
certificatePolicies		~	False					
	PolicyIdentifier	~				1.3.171.1.1.10.3.15		
	policyQualifierID	~			S	ld-qt-1 (CPS)		
	qualifier	~			S	https://repository.luxtrust.lu		
	policyQualifierID	~			S	ld-qt-2 (User Notice)		
	noticeNumbers							
	DisplayText	~				LuxTrust Certificate on Secure User Device compliant with ETSI TS 102 042 NCP+ certificate policy. Key Generation by CSP. <b>Sole Authorised Usage</b> : <i>Advanced</i> <i>electronic seal signature services</i> .		
	PolicyIdentifier	✓				0.4.0.2042.1.2		

#### 3.3.20 LuxTrust SSL/TLS Standard Server Certificates – LCP certificates supporting Signature, Authentication & Encryption

LuxTrust SSL/TLS Standard Server Certificates are ETSI TS 102 042 LCP Certificates not certified as generated on SSCD, with creation of the keys by the Subscriber, with 2048-bit key size and one (1), two (2) or three (3) years validity from issuing start date.

These LuxTrust SSL/TLS Standard Server Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.3).

The usage purpose of these LuxTrust SSL/TLS Standard Server Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust LCP Server Certificates include the corresponding LuxTrust LCP OID for SSL/TLS server certificates, i.e., <1.3.171.1.1.10.5.1>.

The following table provides the description of the fields for LuxTrust Server Certificates.

	LuxTrust SSL Server LCP Certificate Profile										
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value					
Base											
Profile											
Version		~	False								
					S	Version 3 Value = "2"					
SerialNumbe	er	~	False								
					FDV	Validated on duplicates.					
signatureAlg	jorithm	~	False								
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256					
						with RSA Encryption.					



VERSION 1.22

	LuxTrust					
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
signatureVa	lue	~	False			
					D	Issuing CA Signature.
issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust <b>SSL</b> CA x <sup>22</sup>
	organizationName	√			S	LuxTrust S.A.
Validity		√	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time <b>12;24;36</b> Months
subject		~	False			
	countryName	~		М	D	Country in which the company's constitution's registered office is established (as specified in the memorandum and articles of association). (ISO3166)
	stateOrProvinceName	~		0	D	
	localityName	~		М	D	Location in which the company' registered office is established (a specified in the memorandum and article of association or an equivalent document)
	organizationName	~		М	D	Names as in articles of association including the legal form (as specified i the memorandum and articles of association or an equivalent document)
	organizationalUnitName1	~		0	D	As provided by Subscriber
	organizationalUnitName2	✓		0	D	As provided by Subscriber
	commonName	~		М	D	FQDN (Fully Qualified Domain Name) of application/server – Exact and full URL for a Web Server or IP address or uniquiname of server.
	serialNumber	~		0	D	Serial Number as provided by subscriber
	emailAddress	~		0	D	Subject's email address
subjectPubli	cKeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA
	subjectPublicKey	√		М	İ	public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKey	ldentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>SSL</b> C/ public key

Page 86 de 113



VERSION 1.22

	LuxTrust SSL Server LCP Certificate Profile										
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value					
authorityInfo	Access	✓	False								
	AccessMethod	√				ld-ad-1					
	accessLocation	~				http://ssl.ocsp.luxtrust.lu <sup>33</sup>					
	AccessMethod	~				ld-ad-2					
	accessLocation	~				http://ca.luxtrust.lu/LTSSLCAx <sup>22</sup> .crt					
cRLDistribut	ionPoint	~	False								
	distributionPoint	~			S						
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx <sup>22</sup> .crl					
Subject											
Properties											
subjectAltNa		×	False								
	Rfc822Name	~		0	D	Certificate Holder's email address					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	V		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server.					

<sup>33</sup> Since SSL CA 2

Page 87 de 113



	LuxTrust	SSL Se	erver L	.CP Cer	tificat	e Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of
						server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		$\checkmark$				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		$\checkmark$				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.



VERSION 1.22

	LuxTrust	SSL S	erver L	.CP Cer	tificat	e Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
subjectKeylo		✓	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit
						field with a 0100 value, followed by the
						least significant 60 bits of the SHA-1 hash
						of the value or subjectPublicKey bit string
						(tag, not including the length and number
- "						of unused bit-string bits).
Policy						
Properties		✓	True			
keyUsage	di sita 101 sus struct	✓	True		0	True
	digitalSignature				S	True
	nonRepudiation	~			S	False
	Ποιπτερααίαιοπ				0	
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.5.1
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Standard SSL/TLS Server
						Certificate. Not supported by SSCD, Key
						Generation by Subscriber. GTC, CP and
						CPS on http://repository.luxtrust.lu.
						Signed by a SSL CA.
	PolicyIdentifier	<ul> <li>✓</li> </ul>				0.4.0.2042.1.3
Extended Ke	ey Usage	~	False			
<u> </u>	serverAuth	✓			S	True
	clientAuth	✓			S	True
	emailProtection	~			S	True

### 3.3.21 SSL/TLS Extended Validation Server Certificates – EVCP certificates supporting Signature, Authentication & Encryption

LuxTrust SSL/TLS Extended Validation Server Certificates (hereinafter EV SSL Certificates) are ETSI TS 102 042 EVCP Certificates, with creation of the keys by the Subscriber, with 2048-bit key size and one (1) or two (2) years validity from issuing start date.

VERSION 1.22

These LuxTrust SSL/TLS Extended Validation Server Certificates are compliant with and include the OID reference of the EVCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.4).

The usage purpose of these LuxTrust SSL/TLS Extended Validation Server Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust EVCP Server Certificates include the corresponding LuxTrust EVCP OID for SSL/TLS extended validation server certificates, i.e., <1.3.171.1.10.5.2>.

#### Appropriate Certificate uses:

The primary purposes of these Certificates are to:

- Identify the legal entity that controls a Web site: Provide a reasonable assurance to the user of an Internet browser that
  the Web site the user is accessing is controlled by a specific legal entity identified in the EV SSL Certificate by name,
  address of Place of Business, Jurisdiction of Incorporation or Registration and Registration Number or other
  disambiguating information; and
- Enable encrypted communications with a Web site: Facilitate the exchange of encryption keys in order to enable the encrypted communication of information over the Internet between the user of an Internet browser and a Web site.

The secondary purposes of these Certificates are to help establish the legitimacy of a business claiming to operate a Web site or distribute executable code, and to provide a vehicle that can be used to assist in addressing problems related to phishing, malware, and other forms of online identity fraud. By providing more reliable third-party verified identity and address information regarding the business, EV SSL Certificates may help to:

- Make it more difficult to mount phishing and other online identity fraud attacks using Certificates;
- Assist companies that may be the target of phishing attacks or online identity fraud by providing them with a tool to better identify themselves to users; and
- Assist law enforcement organizations in their investigations of phishing and other online identity fraud, including where appropriate, contacting, investigating, or taking legal action against the Subject.

#### Prohibited Certificate uses:

The EV SSL Certificates focus only on the identity of the Subject named in the Certificate, and not on the behavior of the Subject. As such, these Certificates are not intended to provide any assurances, or otherwise represent or warrant:

- That the Subject named in the EV SSL Certificate is actively engaged in doing business;
- That the Subject named in the EV SSL Certificate complies with applicable laws;
- That the Subject named in the EV SSL Certificate is trustworthy, honest, or reputable in its business dealings; or
- That it is "safe" to do business with the Subject named in the EV SSL Certificate.

Moreover, usages of EV SSL Certificates for other purposes than those identified in the present CP are prohibited.

#### Verification of Applicant's Legal Existence and Identity:

For EV SSL Certificates, Applicant's legal existence and identity are verified in compliance with the EV Guidelines [13]:

- For Private Organization Subjects:
  - i. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
  - ii. Verify the Applicant's Organization Name as stipulated in the EV Guidelines [13]);
  - iii. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);
  - iv. Verify the Applicant's Registered Agent as stipulated in the EV Guidelines [13]).



VERSION 1.22

- For Government Entity Subjects:
  - i. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
  - ii. Verify the Applicant's Entity name as stipulated in the EV Guidelines [13]);
  - iii. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);

For EV SSL Certificates, LuxTrust SSL CA shall use a single naming convention as set forth in the EV Guidelines [13] and the Baseline Requirements [14] published by the CA/Browser Forum.

The following table provides the description of the fields for LuxTrust Server Certificates.

	SSL/TLS Exten	ded V	alidati	on Ser	ver C	ertificates
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumber	r	~	False			
					FDV	Validated on duplicates.
signatureAlgo	prithm	~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11"
						SHA256 with RSA Encryption.
signatureValu	Ie	~	False			
					D	Issuing CA Signature.
issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust <b>SSL</b> CA x <sup>22</sup>
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time
						+ 12;24 Months
subject		~	False			
	countryName			м	D	Country in which the company's or
	(OID: 2.5.4.6)					institution's registered office is
		~				established (as specified in the
						memorandum and articles o
						association). (ISO3166)
	jurisdictionOfIncorporationCount			м	D	Contains the country informatior
	ryName					specified using the applicable ISC
						country code for the jurisdiction o
	(OID: 1.3.6.1.4.1.311.60.2.1.3)	~				Incorporation for the Incorporating
						Agency or Jurisdiction of Registration fo
						a Registration Agency that operates a
						the country level, at state/pr.



	SSL/TLS Exten	ded Va	alidati	on Ser	ver C	ertificates
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	stateOrProvinceName (OID: 2.5.4.8)	*		Μ	D	State or Province in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	jurisdisctionOfIncorporationState OrProvinceName (OID: 1.3.6.1.4.1.311.60.2.1.2)	~		0	D	Contains the jurisdiction for the applicable Incorporating Agency or Registration Agency at the state or province level MUST include both country and state or province information,
	localityName (2.5.4.7)	*		М	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	jurisdictionOfIncorporationLocalit yName (1.3.6.1.4.1.311.60.2.1.1)	~		0	D	Jurisdiction for the applicable Incorporating Agency or Registration Agency at the locality level MUST include the country and state or province information, where the state or province regulates the registration of the entities at the locality level, as well as the locality information.
	organizationName (OID: 2.5.4.10)	~		М	D	Full legal organization name as listed in the official records of the Incorporating or Registration Agency in the Subject's Jurisdiction of Incorporation or Registration or as otherwise verified by the CA as provided herein.
	businessCategory (OID: 2.5.4.15)	~		М	D	Depending on the Subject qualifications, this field contains one of the following String: • Private Organization • Government Entity



VERSION 1.22

	SSL/TLS Exten	ded V	alidati	on Ser	ver C	ertificates
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	serialNumber			М	D	See EV Guidelines [13] :
	(OID: 2.5.4.5)	¥				For Private Organizations, this field MUST contain the Registration (or similar) Number assigned to the Subject by the Incorporating or Registration Agency in its Jurisdiction of Incorporation or Registration, as appropriate. If the Jurisdiction of Incorporation or Registration does not provide a Registration Number, then the date of Incorporation or Registration SHALL be entered into this field in any one of the common date formats.
						have a Registration Number or readily verifiable date of creation, the CA SHALL enter appropriate language to indicate that the Subject is a Government Entity.
	postalCode (OID: 2.5.4.17)	~		0	D	Postal code of the subject place of business.
	streetAddress (OID: 2.5.4.9)	~		0	D	Number and Street of the physical location of the subject
subjectPublic	KeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyle	dentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>SSL</b> CA public key
authorityInfoA	ccess	~	False			
	AccessMethod	~				ld-ad-1
	accessLocation	$\checkmark$				http://ssl.ocsp.luxtrust.lu <sup>33</sup>
	AccessMethod	√				Id-ad-2
	accessLocation	√				http://ca.luxtrust.lu/LTSSLCAx <sup>22</sup> .crt
cRLDistributio	nPoint	√	False			
	distributionPoint	√			S	
	fullName	√			-	http://crl.luxtrust.lu/LTSSLCAx <sup>22</sup> .crl
Subject Properties						
subjectAltNan	ne	~	False			

Page 93 de 113



	SSL/TLS Exten	ded Va	alidati	on Ser	ver Ce	ertificates
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	SubjectAltName-dNSName	✓		Μ		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by
						the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	*		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	¥		Ο		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates
	SubjectAltName-dNSName	*		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	¥		Ο		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.



VERSION 1.22

	SSL/TLS Extended Validation Server Certificates								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value			
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of			
						application/server - Exact DNS for a			
						Web Server or IP address or unique			
		✓				name of server, owned or controlled by			
						the subject and to be associated with the			
						Subject's server. Wildcard name not			
						allowed for EV SSL Certificates.			
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of			
						application/server - Exact DNS for a			
						Web Server or IP address or unique			
		~				name of server, owned or controlled by			
						the subject and to be associated with the			
						Subject's server. Wildcard name not			
						allowed for EV SSL Certificates.			
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of			
						application/server - Exact DNS for a			
						Web Server or IP address or unique			
		~				name of server, owned or controlled by			
						the subject and to be associated with the			
						Subject's server. Wildcard name not			
						allowed for EV SSL Certificates.			
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of			
						application/server – Exact DNS for a			
		,				Web Server or IP address or unique			
		~				name of server, owned or controlled by			
						the subject and to be associated with the			
						Subject's server. Wildcard name not			
subjectKeyIde	petifier	✓	False			allowed for EV SSL Certificates.			
Subjectiveying	keyldentifier	<ul> <li>✓</li> </ul>	I dise		Fixed	The Key Identifier comprises a four-bit			
	Reyldentiner				TIXEU	field with a 0100 value, followed by the			
						least significant 60 bits of the SHA-1			
						hash of the value or subjectPublicKey bit			
						string (tag, not including the length and			
						number of unused bit-string bits).			
Policy									
Properties									
keyUsage		✓ ✓	True						
	digitalSignature	Ť			S	True			
	nonRepudiation	~			S	False			
	keyEncipherment	✓			S	True			
	dataEncipherment	~			S	True			
certificatePoli	cies	~	False						
Son anoalor Oli	0.00		1 0130						

Page 95 de 113



VERSION 1.22

	SSL/TLS Extended Validation Server Certificates									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
	PolicyIdentifier	~				1.3.171.1.1.10.5.2				
	policyQualifierID	~			S	Id-qt-1 (CPS)				
	qualifier	~			S	https://repository.luxtrust.lu				
	policyQualifierID	~			S	Id-qt-2 (User Notice)				
	noticeNumbers									
	DisplayText	~				ETSI TS 102 042 EVCP compliant				
						certificate signed by a SSL CA. Key				
						generation by the Subscriber.				
						Certificates intended to be used for				
						authenticating servers accessible				
						through the Internet.				
	PolicyIdentifier	$\checkmark$				0.4.0.2042.1.4				
Extended Key	/ Usage	~	False							
-	serverAuth	~			S	True				
	clientAuth	✓			S	True				
	emailProtection	~			S	False				

### 3.3.22 SSL/TLS Extended Validation Server Certificates - EVCP+ certificates supporting Signature, Authentication & Encryption

LuxTrust SSL/TLS Extended Validation+ Server Certificates are ETSI TS 102 042 EVCP+ Certificates (hereinafter EVCP+ Certificates) certified as generated on Secure User Device, with creation of the keys by the Subscriber, with 2048-bit key size and one (1) or two (2) years validity from issuing start date.

These LuxTrust SSL/TLS Extended Validation+ Server Certificates are compliant with and include the OID reference of the EVCP+ certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.5).

The usage purpose of these LuxTrust SSL/TLS Extended Validation+ Server Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust EVCP+ Certificates include the corresponding LuxTrust EVCP+ OID for SSL/TLS extended validation+ server certificates, i.e., <1.3.171.1.1.10.5.3>.

#### Appropriate Certificate uses:

The primary purposes of these Certificates are to:

- Identify the legal entity that controls a Web site: Provide a reasonable assurance to the user of an Internet browser that
  the Web site the user is accessing is controlled by a specific legal entity identified in the EVCP+ Certificate by name,
  address of Place of Business, Jurisdiction of Incorporation or Registration and Registration Number or other
  disambiguating information; and
- Enable encrypted communications with a Web site: Facilitate the exchange of encryption keys in order to enable the encrypted communication of information over the Internet between the user of an Internet browser and a Web site.

The secondary purposes of these Certificates are to help establish the legitimacy of a business claiming to operate a Web site or distribute executable code, and to provide a vehicle that can be used to assist in addressing problems related to phishing, malware, and other forms of online identity fraud. By providing more reliable third-party verified identity and address information regarding the business, EVCP+ Certificates may help to:

- Make it more difficult to mount phishing and other online identity fraud attacks using Certificates;
- Assist companies that may be the target of phishing attacks or online identity fraud by providing them with a tool to better identify themselves to users; and

Page 96 de 113

VERSION 1.22

Assist law enforcement organizations in their investigations of phishing and other online identity fraud, including where
appropriate, contacting, investigating, or taking legal action against the Subject.

#### Prohibited Certificate uses:

The EVCP+ Certificates focus only on the identity of the Subject named in the Certificate, and not on the behavior of the Subject. As such, these Certificates are not intended to provide any assurances, or otherwise represent or warrant:

- That the Subject named in the EVCP+ Certificate is actively engaged in doing business;
- That the Subject named in the EVCP+ Certificate complies with applicable laws;
- That the Subject named in the EVCP+ Certificate is trustworthy, honest, or reputable in its business dealings; or
- That it is "safe" to do business with the Subject named in the EVCP+ Certificate.

Moreover, usages of EVCP+ Certificates for other purposes than those identified in the present CP are prohibited.

#### Verification of Applicant's Legal Existence and Identity:

For EVCP+ Certificates, Applicant's legal existence and identity are verified in compliance with the EV Guidelines [13]:

- For Private Organization Subjects:
  - v. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
  - vi. Verify the Applicant's Organization Name as stipulated in the EV Guidelines [13]);
  - vii. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);
- viii. Verify the Applicant's Registered Agent as stipulated in the EV Guidelines [13]).
- For Government Entity Subjects:
  - iv. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
  - v. Verify the Applicant's Entity name as stipulated in the EV Guidelines [13]);
  - vi. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);

For EVCP+ Certificates, LuxTrust SSL CA shall use a single naming convention as set forth in the EV Guidelines [13] and the Baseline Requirements [14] published by the CA/Browser Forum.

The following table provides the description of the fields for LuxTrust Server Certificates.

SSL/TLS Extended Validation Server Certificates on Secure User Device									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value			
Base Profile									
Version		~	False						
					S	Version 3 Value = "2"			
SerialNumber		~	False						
					FDV	Validated on duplicates.			
signatureAlgo	rithm	~	False						



LUXTRUST



VERSION 1.22

	L/TLS Extended Validation					Secure User Device
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	algorithm				S	OID = "1.2.840.113549.1.1.11" -
		✓				SHA256 with RSA Encryption.
signatureVal			False			
laguar		✓	Falsa		D S	Issuing CA Signature.
issuer	countryName	✓	False		S	LU
	commonName	~			S	LuxTrust <b>SSL</b> CA x <sup>22</sup>
	organizationName	~			s	LuxTrust S.A.
Validity	organization tarno	~	False		0	
<b>,</b>	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + <b>12;24</b> Months
subject		~	False			
	countryName (OID: 2.5.4.6)	~		М	D	Country in which the company's or institution's registered office is established (as specified in the memorandum and articles of association). (ISO3166)
	jurisdictionOfIncorporationCountryNa me (OID: 1.3.6.1.4.1.311.60.2.1.3)	V		Μ	D	Contains the country information specified using the applicable ISO country code for the jurisdiction of Incorporation for the Incorporating Agency or Jurisdiction of Registration for a Registration Agency that operates at the country level, at state/pr.
	stateOrProvinceName (OID: 2.5.4.8)	~		М	D	State or Province in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	jurisdisctionOfIncorporationStateOrPro vinceName (OID: 1.3.6.1.4.1.311.60.2.1.2)	v		0	D	Contains the jurisdiction for the applicable Incorporating Agency or Registration Agency at the state or province level MUST include both country and state or province information,
	localityName (2.5.4.7)	~		М	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)

Page 98 de 113



SSI	/TLS Extended Validation	Serve	er Cert	ificate	s on S	Secure User Device
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	jurisdictionOfIncorporationLocalityNam e (1.3.6.1.4.1.311.60.2.1.1)	~		O	D	Jurisdiction for the applicable Incorporating Agency or Registration Agency at the locality level MUST include the country and state or province information, where the state or province regulates the registration of the entities at the locality level, as well as the locality information.
	organizationName (OID: 2.5.4.10)	~		Μ	D	Full legal organization name as listed in the official records of the Incorporating or Registration Agency in the Subject's Jurisdiction of Incorporation or Registration or as otherwise verified by the CA as provided herein
	businessCategory (OID: 2.5.4.15)	¥		Μ	D	Depending on the Subject qualifications, this field contains one of the following String: • Private Organization • Government Entity
	serialNumber (OID: 2.5.4.5)	~		Δ	D	See EV Guidelines [13] : For Private Organizations, this field MUST contain the Registration (or similar) Number assigned to the Subject by the Incorporating or Registration Agency in its Jurisdiction of Incorporation or Registration, as appropriate. If the Jurisdiction of Incorporation or Registration does not provide a Registration Number, then the date of Incorporation or Registration SHALL be entered into this field in any one of the common date formats. For Government Entities that do not have a Registration Number or readily verifiable date of creation, the CA SHALL enter appropriate language to indicate that the Subject is a Government Entity.



SS	L/TLS Extended Validation	Serve	er Cert	ificate	s on s	Secure User Device
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	postalCode			0	D	Postal code of the subject place of
	(OID: 2.5.4.17)	~				business.
	streetAddress			0	D	Number and Street of the physical
	(OID: 2.5.4.9)	~				location of the subject
subjectPublic	:KeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit
	subjectPublicKey	~		М		(RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKey	Identifier	✓	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>SSL</b> CA public key
authorityInfo	Access	~	False			
	AccessMethod	✓				Id-ad-1
	accessLocation	✓				http://ssl.ocsp.luxtrust.lu <sup>33</sup>
	AccessMethod	✓ ✓				ld-ad-2
	accessLocation	<ul> <li>✓</li> </ul>				http://ca.luxtrust.lu/LTSSLCAx <sup>22</sup> .crt
cRLDistributi	onPoint	<ul> <li>✓</li> </ul>	False			
	distributionPoint	✓ ✓			S	22
	fullName	×				http://crl.luxtrust.lu/LTSSLCAx <sup>22</sup> .crl
Subject Properties						
subjectAltNa	me	~	False			
	SubjectAltName-dNSName	~		М		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	×		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.



SSL	/TLS Extended Validation	Serve	er Cert	ificate	s on S	Secure User Device
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	SubjectAltName-dNSName	~		Ο		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		Ο		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.



VERSION 1.22

SS	<b>SL/TLS Extended Validation</b>	Serv	er Cert	ificate	s on s	secure User Device
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain
						Name) of application/server – Exact
						DNS for a Web Server or IP address
		~				or unique name of server, owned or
						controlled by the subject and to be
						associated with the Subject's server.
						Wildcard name not allowed for
						EVCP+ Certificates.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain
						Name) of application/server – Exact
						DNS for a Web Server or IP address
		~				or unique name of server, owned or
		•				controlled by the subject and to be
						associated with the Subject's server.
						Wildcard name not allowed for
						EVCP+ Certificates.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain
						Name) of application/server – Exact
						DNS for a Web Server or IP address
						or unique name of server, owned or
		~				controlled by the subject and to be
						associated with the Subject's server.
						Wildcard name not allowed for
						EVCP+ Certificates.
subjectKeyl	dentifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-
						bit field with a 0100 value, followed
						by the least significant 60 bits of the
						SHA-1 hash of the value or
						subjectPublicKey bit string (tag, not
						including the length and number of
						unused bit-string bits).
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePo	blicies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.5.3
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	quanto	I	1	I	0	<u>Aupointopository luxitubiliu</u>

Page 102 de 113



VERSION 1.22

SSL	/TLS Extended Validation	Serve	er Cert	ificate	s on s	Secure User Device
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				ETSI TS 102 042 EVCP+ compliant certificate signed by a SSL CA. Key generation by the Subscriber on Secure Device. Intended to be used for authenticating servers accessible through the Internet.
	PolicyIdentifier	$\checkmark$				0.4.0.2042.1.5
Extended Key	v Usage	~	False			
	serverAuth	✓			S	True
	clientAuth	✓			S	True
	emailProtection	~			S	False

### 3.3.23 LuxTrust Object (or Code) Signing Certificates

LuxTrust Code Signing Certificates are ETSI TS 102 042 LCP Certificates not certified as generated on SSCD, with creation of the keys by the Subscriber, with a 2048-bit key size and one (1), two (2) or three (3) years validity from issuing start date.

These LuxTrust Code Signing Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.3).

The usage purpose of these LuxTrust Code Signing Certificates is the purpose of digital signature. The LuxTrust LCP Code Signing Certificates include the corresponding LuxTrust LCP OID, i.e., *<1.3.171.1.1.10.5.4>*.

#### The following table provides the description of the fields for LuxTrust Code Signing Certificates.

	LuxTrust LCP Code Signing Certificate Profile										
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value					
Base Profil	Base Profile										
Version		~	False								
					S	Version 3 Value = "2"					
SerialNum	ber	~	False								
					FDV	Validated on duplicates.					
signatureA	lgorithm	~	False								
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with RSA Encryption.					
signatureV	alue	~	False								
					D	Issuing CA Signature.					
issuer		~	False		S						
	countryName	~			S	LU					

Page 103 de 113



VERSION 1.22

	Lu	xTrust L	.CP Code	Signing	Certificat	e Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
	commonName	$\checkmark$			S	LuxTrust SSL CA x <sup>22</sup>
	organizationName	✓			S	LuxTrust S.A.
validity		$\checkmark$	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 12; 24; 36 months
subject		~	False			
	countryName	~		М	D	Country in which the company's registered office is established (as specified in the memorandum and articles of association). (ISO3166)
	stateOrProvinceName	~		0	D	
	localityName	~		М	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	organizationName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	organizationalUnitName1	$\checkmark$		0	D	As provided by Subscriber
	organizationalUnitName2	~		0	D	As provided by Subscriber
	commonName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	serialNumber	~		О	D	NA or Serial Number as provided by subscriber
	emailAddress	~		0	D	Subject's email address if available
subjectPub	licKeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 (RSA); public
	subjectPublicKey	$\checkmark$		М		exponent: Fermat-4 (=010001).
Extensions	3					
Authority P	roperties					
authorityKe	eyldentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>SSL</b> CA public key

Page 104 de 113



VERSION 1.22

	Lu	uxTrust I	LCP Code	Signing	Certificat	e Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
authorityIn	foAccess	~	False			
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ssl.ocsp.luxtrust.lu <sup>33</sup>
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTSSLCAx <sup>22</sup> .crt
CRLDistrib	outionPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx <sup>22</sup> .crl
Subject Pro	operties					
subjectAltN	Name	~	False			
	Rfc822Name	~		0	D	Subject's email address
subjectKey	/Identifier	~	False			
	keyldentifier	v			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the leas significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Prop	perties					
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificateF	Policies	~	False			
	PolicyIdentifier	~			S	1.3.171.1.1.10.5.4
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	http://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~			S	LuxTrust Code Signing Certificate. No supported by SSCD, Key Generation by Subscriber. GTC, CP and CPS or http://repository.luxtrust.lu. Signed by an SSL CA.

Page 105 de 113

VERSION 1.22

	LuxTrust LCP Code Signing Certificate Profile									
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value				
	PolicyIdentifier	~			S	0.4.0.2042.1.3				
Extended k	Key Usage	~	False							
	Object Signing	~			S	Set				

#### 3.3.24 LuxTrust SSL/TLS Certificate for Client Authentication

LuxTrust SSL/TLS Client Certificates are ETSI TS 102 042 LCP Certificates not certified as generated on SSCD, with creation of the keys by the Subscriber, with 2048-bit key size and one (1), two (2) or three (3) years validity from issuing start date.

These LuxTrust SSL/TLS Client Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.3).

The usage purpose of these LuxTrust SSL/TLS Client Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust LCP Server Certificates include the corresponding LuxTrust LCP OID for SSL/TLS client certificates, i.e., <1.3.171.1.1.10.5.5>.

The following table provides the description of the fields for LuxTrust Server Certificates.

	LuxTrust SSL Client LCP Certificate Profile										
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value					
Base											
Profile											
Version		~	False								
					S	Version 3 Value = "2"					
SerialNumbe	er	~	False								
					FDV	Validated on duplicates.					
signatureAlg	orithm	~	False								
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256					
						with RSA Encryption.					
signatureVal	lue	~	False								
					D	Issuing CA Signature.					
issuer		~	False		S						
	countryName	~			S	LU					
	commonName	~			S	LuxTrust <b>SSL</b> CA					
	organizationName	~			S	LuxTrust S.A.					
Validity		~	False								
	NotBefore	~			D	Certificate generation process date/time.					
	NotAfter	~			D	Certificate generation process date/time +					
						12; 24; 36 Months					
subject		~	False								
	countryName			М	D	Country in which the company's or					
		~				institution's registered office is established					
		Ň				(as specified in the memorandum and					
						articles of association). (ISO3166)					
	stateOrProvinceName	~		0	D						

Page 106 de 113



VERSION 1.22

LuxTrust SSL Client LCP Certificate Profile								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value		
	localityName	~		Μ	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)		
	organizationName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)		
	organizationalUnitName 1	~		0	D	As provided by Subscriber		
	organizationalUnitName 2	~		0	D	As provided by Subscriber		
	commonName	~		М	D	As provided by Subscriber		
	serialNumber	~		0	D	Serial Number as provided by subscriber		
	emailAddress	~		0	D	Subject's email address		
subjectPublic	cKeyInfo	~	False					
	algorithm	~				Public Key: Key length: 2048 bit (RSA);		
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).		
Extensions								
Authority Properties								
authorityKey	Identifier	~	False					
	keyldentifier	~				SHA-1 Hash of the LuxTrust <b>SSL</b> CA public key		
authorityInfo	Access	✓	False					
	AccessMethod	~				ld-ad-1		
	accessLocation	~				http://ssl.ocsp.luxtrust.lu <sup>33</sup>		
	AccessMethod	~				Id-ad-2		
	accessLocation	~				http://ca.luxtrust.lu/LTSSLCAx <sup>22</sup> .crt		
cRLDistribut	ionPoint	~	False					
	distributionPoint	~			S			
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx <sup>22</sup> .crl		
Subject Properties								
subjectAltNa	me	~	False					
	Rfc822Name	~		0	D	Certificate Holder's email address		
subjectKeylo	subjectKeyIdentifier		False					
	keyldentifier	✓ 			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).		

Page 107 de 113



VERSION 1.22

	LuxTrust SSL Client LCP Certificate Profile								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value			
Policy									
Properties									
keyUsage		~	True						
	digitalSignature	~			S	True			
	nonRepudiation	~			S	False			
	keyEncipherment	~			S	True			
	dataEncipherment	~			S	True			
certificatePo	licies	✓	False						
	PolicyIdentifier	~				1.3.171.1.1.10.5.5			
	policyQualifierID	~			S	ld-qt-1 (CPS)			
	qualifier	~			S	https://repository.luxtrust.lu			
	policyQualifierID	~			S	Id-qt-2 (User Notice)			
	noticeNumbers								
	DisplayText	~				LuxTrust Standard SSL/TLS Client			
						Authentication Certificate. Not supported			
						by SSCD, Key Generation by Subscriber.			
						GTC, CP and CPS on			
						http://repository.luxtrust.lu.			
						Signed by a SSL CA.			
	PolicyIdentifier	~				0.4.0.2042.1.3			
Extended Ke	Extended Key Usage		False						
	serverAuth	~			S	False			
	clientAuth	✓			S	True			
	emailProtection	✓			S	True			

### 3.3.25 Timestamping Certificate Profile

LuxTrust Timestamping Certificates are issues by the LuxTrust Timestamping CA with keys located on HSM devices, with generation by LuxTrust CSP according to the processes and procedures described in the applicable CP, with a 2048-bit key size and 5 years validity from issuing start date.

The profiles of the public key certificates used by the LuxTrust TSA comply with the RFC 3161 [6]. The full set of rules used by LuxTrust S.A. for the issuing and management of these certificates that are issued by a LuxTrust CA, as well as their extensions, are described in the LuxTrust Internal Certificate Policy for PKI Participants other than Subscribers and Relying Parties.

LuxTrust Timestamping Certificate Profile								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value		
Base								
Profile	Profile							
Version		~	False					





VERSION 1.22

	LuxTrus	t Time	stampi	ing Cer	tificat	e Profile
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value
					S	Version 3 Value = "2"
SerialNumbe	ər	~	False			
					FDV	Validated on duplicates.
signatureAlg	orithm	~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256
						with RSA Encryption.
signatureVal	ue	~	False			
					D	Issuing CA Signature.
issuer	1	✓	False		S	
	countryName	<ul> <li>✓</li> </ul>			S	LU
	commonName	✓			S	LuxTrust Global Timestamping CA x <sup>22</sup>
	organizationName	✓			S	LuxTrust S.A.
Validity	1	✓ ✓	False			
	NotBefore	✓ ✓			D	Certificate generation process date/time.
	NotAfter	V			D	Certificate generation process date/time + 60 Months
subject		~	False			
	commonName	~		М	D	tts.luxtrust.lu
	localityName	~		М	D	Capellen
	organizationName	~		М	D	LuxTrust S.A.
	organizationalUnitName 1	~		М	D	PKI Entity
	countryName	~		0	D	LU
subjectPubli	cKeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKey	Identifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Timestamping CA public key
authorityInfo	Access	√	False			
	AccessMethod	~				Id-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGTSACAx <sup>22</sup> .crt
	AccessMethod	~	1	1		ld-ad-1
	accessLocation	~		1		http://ocsp.luxtrust.lu
cRLDistribut		✓	False			
	distributionPoint	~			S	
	fullName	✓	1	1		http://crl.luxtrust.lu/LTGTSACAx <sup>22</sup> .crl
Subject						
Properties						
subjectAltNa	me	~	False			
	Rfc822Name	~		0	D	info@luxtrust.lu
subjectKeylo	lentifier	~	False			

Page 109 de 113



VERSION 1.22

LuxTrust Timestamping Certificate Profile								
Attribute	Field	IN <sup>18</sup>	CE <sup>19</sup>	O/M <sup>20</sup>	CO <sup>21</sup>	Value		
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit		
						field with a 0100 value, followed by the		
						least significant 60 bits of the SHA-1 hash		
						of the value or subjectPublicKey bit string		
						(tag, not including the length and number		
						of unused bit-string bits).		
Policy								
Properties								
keyUsage	1	✓	True					
	digitalSignature	~			S	True		
	nonRepudiation	~			S	False		
	keyEncipherment	~			S	False		
	dataEncipherment	~			S	False		
Extended Ke	y Usage	~	False					
	TimeStamping	~			S	Set		
	(1.3.6.1.5.5.7.3.8)							
Private Key l	Jsage Period	~	False					
	Usage period (2.5.29.16)	~		М	D	Certificate generation process date/time +		
						12 Months		
certificatePol	icies	~	False					
	PolicyIdentifier	~				1.3.171.1.1.10.8.1		
	policyQualifierID	~			S	Id-qt-1 (CPS)		
	qualifier	~			S	https://repository.luxtrust.lu		
	policyQualifierID	~			S	Id-qt-2 (User Notice)		
	noticeNumbers							
	DisplayText	~				LuxTrust LCP certificate compliant with		
						ETSI TS 102 042. Sole authorised usage:		
						Signature of LuxTrust Trusted Time Stamp		
						tokens generated by LuxTrust time-		
						stamping authority.		
	PolicyIdentifier	~				0.4.0.2042.1.3		

### 3.3.26 Certificate extensions

X.509 v3 extensions are supported and used as indicated in the Certificates profiles as described in the present document.

#### 3.3.27 Algorithm object identifiers

Algorithms OID are conforming to IETF RFC 3279 [10] and RFC 5280 [11].

#### 3.3.28 Name forms

Name forms are in the X.500 distinguished name form as implemented in RFC 3739 [12].

### 3.3.29 Name constraints

Name constraints are supported as per RFC 5280 [11].

VERSION 1.22

#### 3.3.30 Certificate policy object identifier

Certificate policy object identifiers are used as per RFC 3739 [12].

#### 3.3.31 Usage of Policy Constraints extension

Usage of Policy Constraints extension is supported as per RFC 5280 [11].

#### 3.3.32 Policy qualifiers syntax and semantics

The use of policy qualifiers defined in RFC 5280 [11] is supported.

#### 3.3.33 Processing semantics for the critical Certificate Policies

Not applicable.

### 3.4 CRL profile

In conformance with the IETF PKIX RFC 2459, the LuxTrust CAs support CRLs compliant with:

- Version numbers supported for CRLs
- CRL and CRL entry extensions populated and their criticality.

The profile of the CRL is provided in the table below:

	LuxTrust CRL Profile
Field	Comments
Version	v2
Signature	Sha1RSA
Issuer	<subjectca></subjectca>
thisUpdate	<creation time=""></creation>
nextUpdate	<creation +="" 100="" ca="" days="" for="" global="" root="" time=""></creation>
	<pre><creation (4="" +="" 30="" 4,5="" and="" for="" hours="" minutes)="" pre="" subordinate<="" time=""></creation></pre>
	Qualified and SSL CAs>
	<creation +="" 24="" cas="" for="" hours="" other="" subordinate="" time=""></creation>
revokedCertificates	
userCertificate	<certificate number="" serial=""></certificate>
revocationDate	<revocation time=""></revocation>
crlEntryExtensions	
reasonCode	<insert code="" list="" of="" reason="" revocation="" used=""></insert>
crlExtensions	
cRLNumber	Non-critical <subject ca="" identifier="" key=""></subject>
authorityKeyIdentifier	Non-critical <ca assigned="" number="" unique=""></ca>

#### 3.4.1 Version number(s)

See section 3.4.

The CA will support X.509 version 2 CRLs, retrievable by online at http://crl.luxtrust.lu.

As an alternative to CRLs the CA may provide other web based or "other" revocation checking service.

#### 3.4.2 CRL entry extensions

See section 3.4.

Page 111 de 113

VERSION 1.22

### 3.5 OCSP profile

The OCSP profile follows IETF PKIX RFC 2560 OCSP v1 and v2. The LuxTrust CAs support signed status requests, and multiple Certificates status requests in one OCSP request as long as they are signed by the same CA.

### 3.5.1 Version number(s)

See section 3.5.

### 3.5.2 OCSP extensions

The following table provides the description of the fields for LuxTrust OCSP profile.

LuxTrust OCSP Certificate Profile								
Attribute	Field	IN18	CE19	O/M20	CO21	Value		
Base								
Profile								
Version	-	•	False					
					S	Version 3 Value = "2"		
SerialNumb	er	•	False					
					FDV	Validated on duplicates.		
signatureAlg	jorithm	•	False					
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256		
						with RSA Encryption.		
signatureVa	lue	•	False					
					D	Issuing LTGRCA Signature		
issuer		•	False		S			
	countryName	•			S	LU		
	commonName	•			S	LuxTrust Global Root x		
	organizationName				S	LuxTrust S.A.		
Validity		•	False					
	NotBefore	•			D	Certificate generation process date/time.		
	NotAfter	•			D	Certificate generation process date/time +		
						maximum 12 Months		
subject	-	•	False					
	countryName	•		М	D	LU		
	organizationName			М	D	LuxTrust S.A.		
	organizationalUnitName 1			0	D	Pki entity		
	commonName	•		М	D	LuxTrust S.A. OCSP Server 2		
subjectPubli	cKeyInfo	•	False					
	algorithm	•				Public Key: Key length: 2048 bit (RSA)		
	subjectPublicKey	•		М		public exponent: Fermat-4 (=010001).		
Extensions								
Authority								
Properties								
authorityKey	ldentifier	•	False					
	keyldentifier	•				SHA-1 Hash of the LuxTrust LTGR x CA		
						public key		

Page 112 de 113



	LuxTrust OCSP Certificate Profile								
Attribute	Field	IN18	CE19	O/M20	CO21	Value			
id-ocsp-nocheck		•	False						
		•			S	NULL			
Subject									
Properties									
subjectKeylo		•	False						
	keyldentifier				Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).			
Policy Properties									
keyUsage		•	True						
	digitalSignature	•			S	True			
	nonRepudiation	•			S	False			
	keyEncipherment	•			S	False			
	dataEncipherment	•			S	False			
certificatePo	licies	•	False						
	PolicyIdentifier	•				1.3.171.1.1.1.0.1.0			
	policyQualifierID	•			S	ld-qt-1 (CPS)			
	qualifier	•			S	https://repository.luxtrust.lu			
	policyQualifierID	•			S	Id-qt-2 (User Notice)			
	noticeNumbers								
	DisplayText	•				LuxTrust S.A. Online Certificate Status Server. IETF PKIX RFC 2560 OCSP v1 and v2. No OCSP extensions are supported.			
	PolicyIdentifier	•				0.4.0.2042.1.3			
Extended Ke		•	False			_			
	OCSPSigning	•			S	True			