

LuxTrust Global Root CA

Certificate specifications

Version number: 1.16

Publication Date: 13/06/2014 Effective Date: 27/06/2014



Copyright © 2014 All rights reserved

Document Information

Document title:	LuxTrust Global Root CA - Certificate specifications
Document Code	N/A
Project Reference:	LuxTrust S.A.
Document Type	Technical Specification
Document Distribution List	Any
Document Classification	Public
Document Owner	CSP Board

Version History

Version	Who	Date	Reason of modification			
1.0	MSC	29/08/2011	Initial Version DRAFT			
1.01	MSC	27/10/2011	Added CRL validity period, revision			
1.02	MSC	24/11/2011	Modified – Document OIDs for CAs			
1.03	MSC	09/02/2012	Modified – Added LCP for integration purposes.			
1.04	MSC	01/03/2012	Modified: Added LCP for integration purposes for CSS Table for OIDs Modification of the CRL issuance algorithm (SHA256 to SHA1) 			
1.05	MSC	19/03/2012	 Modification of the CRL issuance algorithm (SHA256 to SHA1) Modifications following review by Chris Quaresimin and Laurent Breuskin: Removal of + Nestcape proprietary extension: NetscapeCertificateType: sslClient, smime for non-SSL products Display text for CSS integration product Correct CRL and AIA for CSS integration product SSL Object certificate profile 			
1.06	MSC	26/03/2012	Modifications for CSS certificates, signature will be performed using SHA1WithRsa. Changes performed in CSS certificate profile for prod and integration, page 43 and 51.			
1.07	MSC	14/06/2012	Added: TimeStamping CA and TimeStamping certificate profile			
1.08	MSC	29/06/2012	Added: Private key usage Period in TSP			
1.09	LBR	01/08/2012	Added: Certificate Profiles under LuxTrust Global Qualified CA SC LORA & LRS Certificate Modified: Table for OIDs & LuxTrust CA Hierarchy 			
1.09.1	LBR	02/08/2012	Update of OID Page 22			
1.09.2	MSC	07/08/2012	Added: Certificate profile for Extended Validation Certificates : • EVCP – ETSI TS 102 042 • EVCP+ - ETSI TS 102 042 Added: Certificate profile for Secure Online File Exchange (SOFiE)			
1.10	YNU	23/08/2012	Review for validation of CP			
1.10	CSPBoard	24/08/2012	Validation			
1.11	CSPBoard	20/09/2012	Typo update			
1.12	ΥΝU ΤΚΟ	21/12/2012	 Added CP SSL/TLS Certificate for Client Authentication Added CP non SSCD NCP+ Certificates supporting Advanced Electronic Signatures for Mass Signature Services Various syntactical and format corrections 			



1.13	CSP Board	23/04/2013	insertion of ILNAS logo including accreditation reference and technical standards reference
1.14	YNU	29/11/2013	Update specific requirements for CP under the SSL CA
1.15	YNU	18/01/2014	Clarification on Mozilla request
1.16	YNU	05/06/2014	Update Cp - for LuxTrust Global Root Renew - QcS2 et QcS3 - Typo Add CP Seal Signature Services

Table of content

DOCUMEN	T INFORMATION	2
VERSION H	HISTORY	2
TABLE OF	CONTENT	4
INTELLECT	TUAL PROPERTY RIGHTS	6
REFERENC	CES	7
1	INTRODUCTION	8
1.1	THE LUXTRUST PROJECT	8
1.2	GOAL OF THE LUXTRUST PKI	
1.3	LuxTrust PKI Hierarchy	
2	LUXTRUST CERTIFICATION AUTHORITIES	
2.1	Two-level CA hierarchy	
_		
3	CERTIFICATE AND CRL PROFILES	11
3.1	CERTIFICATE TYPES	11
3.2	LuxTrust Certification Authorities – Certificates profiles	26
<i>3.2.1</i>	LuxTrust Global Root CA	26
3.2.2	LuxTrust Global Qualified CA	27
3.2.3	LuxTrust Privacy+ CA	28
3.2.4	LuxTrust SSL CA	29
3.2.5	LuxTrust TEST CA	30
3.2.6	LuxTrust Internal CA	32
<i>3.2.7</i>	LuxTrust TSA (Timestamping) CA	33
3.2.8	LuxTrust e-Government CA	34
3.2.9	Certificate extensions	35
3.2.10	Algorithm object identifiers	35
3.2.11	Name forms	
<i>3.2.12</i>	Name constraints	
<i>3.2.13</i>	Certificate policy object identifier	35
<i>3.2.14</i>	Usage of Policy Constraints extension	
<i>3.2.15</i>	Policy qualifiers syntax and semantics	
3.3	LUXTRUST END-ENTITY – CERTIFICATES PROFILES	
3.3.1	Certificate profiles	
<i>3.3.2</i>	Version number(s)	
3.3.3	LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures	
3.3.4	LuxTrust SSCD NCP+ Certificates supporting Authentication & Encryption	
3.3.5 3.3.6	LuxTrust non SSCD QCP Certificates supporting Advanced Electronic Signatures LuxTrust non SSCD NCP Certificates supporting Authentication & Encryption	
3.3.0 3.3.7	Lux Trust non SSCD NCP Certificates supporting Admenication & Encryption LuxTrust Signing Server Account NCP Certificates supporting Signature, Authentication & Encryption	
3.3.7 3.3.8	Lux rust Signing Server Account NCP Centificates supporting Signature, Authentication & Encryption	
3.3.9	Lux rust NCF + Certificates supporting mass Signature Services	
3.3.10	LuxTrust SSCD LCP+ Integration Certificates supporting Authentication & Encryption	
3.3.11	LuxTrust Signing Server Account LCP Certificates supporting Signature, Authentication & Encryption for int	
	purposes	

LuxTrust Global Root CA Certificate Specifications

<i>3.3.12</i>	LuxTrust Smartcard LORA Certificates supporting Signature for LRAO purposes	61
3.3.13	LuxTrust Smartcard LORA Certificates supporting Authentication & Encryption for LRAO purposes .	63
3.3.14	LuxTrust non SSCD Mass LRAO QCP Certificates supporting Advanced Electronic Signatures	65
3.3.15	LuxTrust NCP+ Certificates supporting SEAL Signature Services	68
3.3.16	LuxTrust SSL/TLS Standard Server Certificates – LCP certificates supporting Signature, /	Authentication &
	Encryption	71
3.3.17	SSL/TLS Extended Validation Server Certificates – EVCP certificates supporting Signature, .	Authentication &
	Encryption	75
3.3.18	SSL/TLS Extended Validation Server Certificates - EVCP+ certificates supporting Signature,	Authentication &
	Encryption	82
3.3.19	LuxTrust Object (or Code) Signing Certificates	
3.3.20	LuxTrust SSL/TLS Certificate for Client Authentication	
3.3.21	Timestamping Certificate Profile	
3.3.22	Certificate extensions	
3.3.23	Algorithm object identifiers	
3.3.24	Name forms	
3.3.25	Name constraints	
3.3.26	Certificate policy object identifier	
3.3.27	Usage of Policy Constraints extension	
3.3.28	Policy qualifiers syntax and semantics	
3.3.29	Processing semantics for the critical Certificate Policies	
3.4	CRL PROFILE	97
3.4.1	Version number(s)	
3.4.2	CRL entry extensions	
3.5	OCSP profile	
3.5.1	Version number(s)	
3.5.2	OCSP extensions	



Intellectual Property Rights

Without limiting the "all rights reserved" copyright on the present document, and except as duly licensed under written form, no part of this publication may be reproduced, stored in or introduced into a retrieval system, or transmitted, in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise) without prior written permission of LuxTrust S.A..



References

- [1] The European Directive 1999/93/EC of the European Parliament and of the Council of 13 December 1999 on a Community framework for electronic signatures.
- [2] European Data Protection Directive 95/46/EC of the European Parliament and of the Council of 24 October 1995 on the protection of individuals with regards to the processing of personal data and on the free movement of such data.
- [3] ETSI TS 101 456 Electronic Signatures and Infrastructures (ESI); Policy requirements for certification authorities issuing qualified certificates.
- [4] ETSI TS 102 042 Electronic Signatures and Infrastructures (ESI); Policy requirements for certification authorities issuing public key certificates.
- [5] ICAO (International Civil Aviation Organization) Machine Readable Travel Documents Technical Report PKI for Machine Readable Travel Documents offering ICC Read-Only Access, version 1.1, October 01, 2004
- [6] ETSI TS 102 023 Electronic Signatures and Infrastructures (ESI); Policy requirements for time-stamping authorities.
- [7] Loi du 22 mars 2000 relative à la création d'un Registre national d'accréditation, d'un Conseil national d'accréditation, de certification, de normalisation et de promotion de la qualité et d'un organisme luxembourgeois de normalisation.
- [8] Loi modifiée du 14 août 2000 relative au commerce électronique modifiant le code civil, le nouveau code de procédure civile, le code de commerce, le code pénal et transposant la directive 1999/93/EC relative à un cadre communautaire pour les signatures électroniques, la directive relative à certains aspects juridiques des services de la société de l'information, certaines dispositions de la directive 97/7/CEE concernant la vente à distance des biens et des services autres que les services financiers.
- [9] Règlement Grand-Ducal du 28 décembre 2001 portant détermination d'un système d'accréditation des organismes de certification et d'inspection, ainsi que des laboratoires d'essais et d'étalonnage et portant création de l'Office Luxembourgeois d'Accréditation et de Surveillance, d'un Comité d'accréditation et d'un Recueil national des auditeurs qualité et techniques.
- [10] Règlement Grand-Ducal du 1^{er} juin 2001 relatif aux signatures électroniques, au paiement électronique et à la création du Comité « Commerce Electronique ».
- [11] Règlement Grand-Ducal du 21 décembre 2004 portant organisation de la notification des prestataires de services délivrant des certificats qualifiés mettant en place un système d'accréditation des prestataires de service de certification, créant un comité signature électronique et déterminant la procédure d'agrément des auditeurs externes.
- [12] LuxTrust Time Stamping Policy. Document OID 1.3.171.1.1.3.1.0, latest version in force.
- [13] Guidelines for the Issuance And Management Of Extended Validation Certificates. CA/Browser Forum. Latest version in force.
- [14] Baseline Requirements for the Issuance and Management of Publicly-Trusted Certificates. CA/Browser Forum. Latest version in force.

1 INTRODUCTION

1.1 The LuxTrust project

The LuxTrust project was created in the form of a Trusted Third Party (hereafter also "TTP"), with an international reach, aiming to establish a national expertise centre for Luxembourg. LuxTrust as TTP especially focuses on providing support for any existing business needs in terms of security and also promotes new "e-business" and "e-government" opportunities, making the best possible use of existing legal and commercial assets which are unique to Luxembourg.

Established in November 2005 through a partnership between the Luxembourg government and the major private financial actors in Luxembourg, LUXTRUST S.A. was created to become a provider of certification services as defined in the law of the Grand-Duchy of Luxembourg modified on 14/08/2000 [7] itself derived from the European Directive on electronic signatures (1999/93/EC; cf. [1]). These laws and directives set out the legal framework for electronic signatures in the Grand-Duchy of Luxembourg as well as for LuxTrust activities as TTP.

LuxTrust S.A. acts as Financial Sector Professional providing Public Key Infrastructure (PKI) services for the whole economic marketplace in Luxembourg, for both private and public organisations.

1.2 Goal of the LuxTrust PKI

The Goal of LuxTrust PKI is to provide to each end-user, in Luxembourg but also outside its national borders, one single shared platform to secure both Government and Private e-applications. Security services supported and provided by the LuxTrust PKI will primarily cover the following services for all applications:

- Strong Authentication;
- Electronic Signatures;
- Encryption facilities;
- Trusted Time Stamping;

LuxTrust will also promote these services towards application service providers in order to facilitate the emergence of eapplications and accelerate eLuxembourg. Within this context, LuxTrust will form the catalyser of such services and applications.

1.3 LuxTrust PKI Hierarchy

LuxTrust S.A., acting as CSP as described in the law of Grand-Duchy of Luxembourg modified on 14/08/2000 [7], is using several Certification Authorities (CAs), as shown in the certificates hierarchy, to issue LuxTrust end-users certificates. These top level CAs are displayed on Figure 1.

In all (CA-) certificates issued to these CAs, LuxTrust S.A. is referred to as the legal entity being the certificate issuing authority, assuming final responsibility and liability for all LuxTrust CAs and services used by LuxTrust S.A. for provision of LuxTrust certifications services through any one of its CAs.

This responsibility and liability is still valid when LuxTrust S.A. acting as CSP through any of its CAs is sub-contracting services or part of services process to third parties. Sub-contracting agreements shall include back-to-back provisions to ensure that sub-contractors shall support the liability and responsibility for the sub-contracted provisioned services.

Page 8 de 98

2 LuxTrust Certification Authorities

As described in section 1.3, LuxTrust S.A. acting as CSP is using several Certification Authorities (CAs) to issue LuxTrust Certificates.

2.1 Two-level CA hierarchy

The top level is the *LuxTrust Global Root CA*, the highest level of authority managed by LuxTrust. The LuxTrust PKI is formed using additional subordinates CAs: The legal person (organisation) responsible for these CAs is LuxTrust S.A. acting as CSP.


The LuxTrust PKI consists in a two-level CA hierarchy:

- One "LuxTrust Global Root CA" root-signing all subordinates LuxTrust CAs
- LuxTrust subordinate CAs. Each of these CAs is root-signed by the LuxTrust Global Root CA. Currently, the following CAs are foreseen:
 - LuxTrust Global Qualified CA
 - LuxTrust Privacy+ CA
 - LuxTrust SSL CA
 - LuxTrust TEST CA
 - LuxTrust Internal CA
 - LuxTrust Time Stamping Authority
 - LuxTrust eGovernment CA
- Additional CAs or CA hierarchies might be signed in the future under the LuxTrust Global Root CA

Subordinate CAs are operating within a grant of authority for issuing certificates under the LuxTrust CPS and the applicable CP. This grant has been provided by the "LuxTrust Global Root CA" (hereafter "LTGRCA") under the responsibility and authority of LuxTrust S.A. acting as CSP.

Note 1: Unless explicitly otherwise indicated, "the CA", refers to the LuxTrust Global Root CA granted to issue CA Certificates under responsibility of LuxTrust S.A. acting as CSP. "The CA" is thus legally designating LuxTrust S.A. acting as CSP.

LuxTrust S.A. acting as CSP ensures the availability of all services pertaining to the Certificates, including the issuance, suspension/un-suspension/revocation and renewal services as they may become available or required in specific applications.

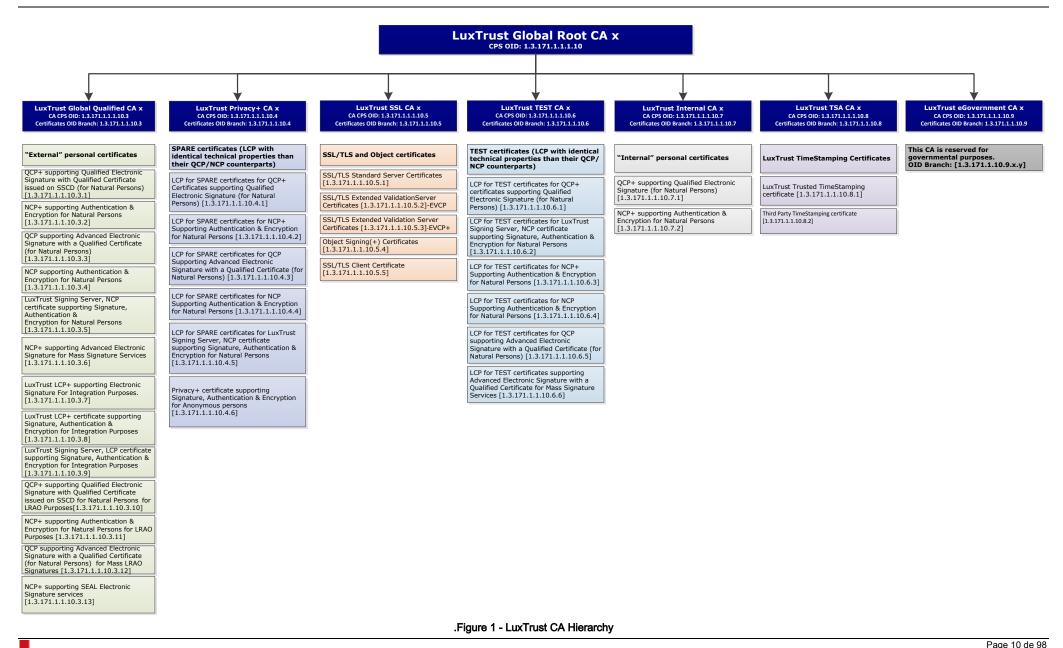

3 CERTIFICATE AND CRL PROFILES

3.1 Certificate types

The following table indicates and shortly describes the various types of certificates that are to be issued by LuxTrust under the new LuxTrust Global Root CA:

CP identification	CP OID	Document OID	Short Description	Ref. ¹		
LuxTrust Qualified Certification Authority						
QCP+ supporting Qualified Electronic Signature (for Natural Persons) issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.1	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP+ compliant Qualified Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of qualified electronic signature. These Certificates are covered by the ILNAS accreditation as registered under the reference N° 2011/8/001 by the national registry of Accredited Certification Service Providers.	LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures		
NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.2	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption. These Certificates are covered by the ILNAS accreditation as registered under the reference N° 2011/8/001 by the national registry of Accredited Certification Service Providers.	LuxTrust SSCD NCP+ Certificates supporting Authentication & Encryption		
QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.3	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP compliant Qualified Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate.	LuxTrust non SSCD QCP Certificates supporting Advanced Electronic Signatures		

¹ Corresponding CP will be defined later when field is empty.



CP identification	CP OID	Document OID	Short Description	Ref. ¹
NCP supporting Authentication & Encryption for Natural Persons issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.4	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP compliant Normalised Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption.	LuxTrust non SSCD NCP Certificates supporting Authentication & Encryption
LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.5	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP compliant Normalised Certificate issued on a non SSCD centralized hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048- bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption.	LuxTrust Signing Server Account NCP Certificates supporting Signature, Authentication & Encryption
NCP+ supporting Advanced Electronic Mass Signature Services issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.6	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on Secure User Device (HSM), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic Mass Signature Services.	LuxTrust NCP+ Certificates supporting Mass Signature Services
LCP for INTEGRATION certificates LCP compliant certificates supporting integration Electronic Signature issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.7	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of electronic signature for INTEGRATION purposes of QCP+ signature certificates.	LuxTrust SSCD LCP+ Integration Certificates supporting Electronic Signatures



CP identification	CP OID	Document OID	Short Description	Ref. ¹
LCP for INTEGRATION certificates LCP+ supporting Authentication & Encryption issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.8	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048- bit key size and three (3) years, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for INTEGRATION purposes of NCP+ authentication and encryption certificates.	LuxTrust SSCD LCP+ Integration Certificates supporting Authentication & Encryption
LCP for INTEGRATION certificates for NCP+ supporting Authentication & Encryption issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.9 1.3.171.1.1.10.3.10	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version) 1.3.171.1.1.10.2.3	ETSI TS 102 042 LCP compliant Normalised Certificate issued on a non SSCD centralized hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048- bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for INTEGRATION PURPOSES. ETSI TS 101 456 QCP+ compliant	LuxTrust Signing Server Account LCP Certificates supporting Signature, Authentication & Encryption for integration purposes LuxTrust
QualifiedElectronicSignaturewithQualifiedCertificateissued onSSCD forNaturalPersonsforLRAOPurposesissuedbyLuxTrustGlobalQualifiedCA		.x(version) .y(sub-version)	Qualified Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of qualified electronic signature for LRAO Purposes.	Smartcard LORA Certificates supporting Signature for LRAO purposes
NCP+ supporting Authentication & Encryption for Natural Persons for LRAO Purposes issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.11	1.3.171.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for LRAO Purposes.	LuxTrust Smartcard LORA Certificates supporting Authentication & Encryption for LRAO purposes



CP identification	CP OID	Document OID	Short Description	Ref. ¹
QCP supporting Advanced Electronic Signature with a Qualified Certificate for Mass LRAO Signature issued by LuxTrust Global Qualified CA	1.3.171.1.1.10.3.12	1.3.171.1.1.1.10.2.3 .x(version) .y(sub-version)	ETSI TS 101 456 QCP compliant Qualified Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for Mass LRAO Signatures.	LuxTrust non SSCD Mass LRAO QCP Certificates supporting Advanced Electronic Signatures
NCP+AdvancedElectronicSealSignatureServicesissuedbyLuxTrustGlobalQualifiedCA	1.3.171.1.1.10.3.13	1.3.171.1.1.1.10.3 .x(version) .y(sub-version)	ETSI TS 102 042 NCP+ compliant Normalised Certificate on Secure User Device (HSM), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic Seal Signature Services.	LuxTrust NCP+ Certificates supporting SEAL Signature Services
LuxTrust Privacy+ Certifi	cation Authority			
LCP for SPARE certificates for QCP+ certificates supporting Qualified Electronic Signature (for Natural Persons) issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.1	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of electronic signature for SPARE purposes of QCP+ signature certificates.	
LCP for SPARE certificates for NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.2	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048- bit key size and three (3) years, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for SPARE purposes of NCP+ authentication and encryption certificates.	



VERSION 1.16

CP identification	CP OID	Document OID	Short Description	Ref. ¹
LCP for SPARE certificates for QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.3	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for SPARE purposes of QCP signature certificates.	
LCP for SPARE certificates for NCP supporting Authentication & Encryption for Natural Persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.4	1.3.171.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for SPARE purposes of NCP authentication and encryption certificates.	
LCPforSPAREcertificatesforLuxTrustSigningServer, NCP certificatesupportingSignature,Authentication&EncryptionforNaturalPersonsissuedbyLuxTrustPrivacy+ CA	1.3.171.1.1.10.4.5	1.3.171.1.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate issued on a non SSCD centralised hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for SPARE purposes of NCP authentication, encryption and signature certificates.	
Privacy+ certificate supporting Signature, Authentication & Encryption for Anonymous persons issued by LuxTrust Privacy+ CA	1.3.171.1.1.10.4.6	1.3.171.1.1.10.2.4 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate issued on a non SSCD hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for authentication, encryption and signature certificates.	

Page 15 de 98



CP identification	CP OID	Document OID	Short Description	Ref. ¹		
LuxTrust SSL Certification	LuxTrust SSL Certification Authority					
SSL/TLS(+) Standard Server Certificates issued by LuxTrust SSL CA	1.3.171.1.1.10.5.1	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SCD, produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1) or (3) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication and secure e- mail.	LuxTrust SSL/TLS Standard Server Certificates – LCP certificates supporting Signature, Authentication & Encryption		
SSL/TLS(+) Extended Validation Server Certificates - EVCP issued by LuxTrust SSL CA	1.3.171.1.1.10.5.2	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 EVCP compliant certificate, produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1) or (2) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication and secure e-mail.	SSL/TLS Extended Validation Server Certificates – EVCP certificates supporting Signature, Authentication & Encryption		
SSL/TLS(+) Extended Validation Server Certificates – EVCP+ issued by LuxTrust SSL CA	1.3.171.1.1.10.5.3	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 EVCP+ compliant certificate, on Secure User Device, produced by SSL CA, 2048-bit key size, (1) or (2) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication and secure e- mail.	SSL/TLS Extended Validation Server Certificates - EVCP+ certificates supporting Signature, Authentication & Encryption		
Object Signing(+) Certificates issued by LuxTrust SSL CA	1.3.171.1.1.10.5.4	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificateproduced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1) or (3) years validity, and a key usage combining digital signature (dS bit), key and data encryption.	LuxTrust Object (or Code) Signing Certificates		



CP identification	CP OID	Document OID	Short Description	Ref. ¹
LuxTrust SSL/TLS Certificate for Client Authentication issued by LuxTrust SSL CA	1.3.171.1.1.10.5.5	1.3.171.1.1.1.10.2.5 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificateproduced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1) or (3) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for client authentication and secure e-mail.	LuxTrust SSL/TLS Certificate for Client Authentication
LuxTrust TEST Certificat	ion Authority		·	
LCP for TEST certificates for QCP+ certificates supporting Qualified Electronic Signature (for Natural Persons) issued by LuxTrust Test CA	1.3.171.1.1.10.6.1	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate, on SSCD, Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048 bit key size and three (3) years validity, and with a key usage limited to the support of electronic signature for TEST purposes of QCP+ signature certificates.	
LCP for TEST certificates for NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Test CA	1.3.171.1.1.10.6.2	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate on SSCD Hardware token (e.g., LuxTrust Smart Card), with creation of the keys by the CSP, 2048- bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for TEST purposes of NCP+ authentication and encryption certificates.	
LCP for TEST certificates for QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) issued by LuxTrust Test CA	1.3.171.1.1.10.6.3	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for TEST purposes of QCP signature certificates.	



CP identification	CP OID	Document OID	Short Description	Ref. ¹
LCP for TEST certificates for NCP supporting Authentication & Encryption for Natural Persons issued by LuxTrust Test CA	1.3.171.1.1.10.6.4	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to authentication purpose (to the exclusion of electronic signature) and key & data encryption for TEST purposes of NCP authentication and encryption certificates.	
LCP for TEST certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons issued by LuxTrust Test CA	1.3.171.1.1.10.6.5	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 102 042 LCP compliant Certificate issued on a non SSCD centralised hardware token (i.e., LuxTrust Signing Server), with creation of the keys by the CSP, 2048-bit key size and three (3) years validity or validity, and with a key usage limited to signature, authentication purpose and/or key & data encryption for TEST purposes of NCP authentication, encryption and signature certificates.	
LCP for TEST certificates supporting Advanced Electronic Signature with a Qualified Certificate for Mass Signature Services issued by LuxTrust Test CA	1.3.171.1.1.10.6.6	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)	ETSI TS 101 456 QCP compliant Qualified Certificate not issued on SSCD Hardware token, with creation of the keys by the CSP, 2048-bit key size and three (3) years validity, and with a key usage limited to the support of advanced electronic signature with a qualified certificate for Mass Signature Services.	
LuxTrust Internal Certific	ation Authority			
QCP+supportingQualifiedElectronicSignature (for NaturalPersons)issued by LuxTrustInternal CA	1.3.171.1.1.10.7.1	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)		



VERSION 1.16

CP identification	CP OID	Document OID	Short Description	Ref. ¹
NCP+ supporting Authentication & Encryption for Natural Persons issued by LuxTrust Internal CA	1.3.171.1.1.10.7.2 nping) Certification Authority 1.3.171.1.1.10.8.1	1.3.171.1.1.10.2.6 .x(version) .y(sub-version) 1.3.171.1.1.10.2.6 .x(version) .y(sub-version)	LuxTrust certificate compliant with ETSI TS 102 023. Sole authorised usage: Signature of LuxTrust Trusted Time Stamp tokens generated by LuxTrust time-stamping authority. These Certificates are covered by the ILNAS accreditation as registered under the reference N° 2011/8/001 by the national registry of Accredited Certification Service Providers.	Timestamping Certificate Profile
Third Party TimeStamping certificate issued by LuxTrust TSA CA	1.3.171.1.1.10.8.2	1.3.171.1.1.1.10.2.6 .x(version) .y(sub-version)		

Subscriber's Agreement (Purchase Orders and General Terms and Conditions) is made available to customers by LuxTrust S.A. acting as CSP.

In addition to these "external" certificate types, "Internal Certificate Policies" are exclusively reserved by LuxTrust S.A. acting as CSP for issuance of security credentials (and certificates) within the management and operation domains of the LuxTrust PKI. This encompasses but is not limited to PKI component services provider's entities (e.g., RA, SRA, TSAs, devices, components, etc.), specific officers considered as security officers, etc.

Within the present document, Certificates issued by LuxTrust S.A. acting as CSP are collectively called the "Certificates" regardless of their type, unless they are more clearly and specifically identified.

In addition to the above described certifications services, the LuxTrust CSP activities include the LuxTrust Time Stamping Services (TSS). These services consist of the management of the infrastructure, and the provisioning of Time Stamp Tokens according to the LuxTrust Time Stamping Policy [12].

These services are provided by LuxTrust S.A. acting as LuxTrust Trusted Time Stamping Services Provider (TTSSP) to the Subscribers and are an integral part of the LuxTrust PKI. Hereafter the term CSP includes the activities and provision of trusted time stamping services as expressed in the European Directive on electronic signatures (cf. [1]). LuxTrust Trusted Time Stamping services are covered within the LuxTrust Trusted Time Stamping V2 policy [12].

The LuxTrust CSP Board acts as Policy Approval Authority for LuxTrust S.A.. In particular the CSP board manages the LuxTrust Certification Practice Statement (CPS) and all related CPs, covering the statements of the practices followed by LuxTrust S.A. acting as CSP in issuing CA and end-entities certificates as well as in issuing TSTs through its TSAs.

Page 19 de 98



By means of the CPS and related CPs, LuxTrust S.A. acting as CSP indicates and guarantees that it complies with regulatory and standard texts applicable, and whether or not this guarantee is supported by an accreditation as well as the name and coordinates of the accreditation body.

LuxTrust S.A. OID : 1.3.171.1	ETSI OIDs	QCP+	0.4.0.1456.1.1
LuxTrust PKI: 1.3.171.1.1	for info	QCP	0.4.0.1456.1.2
		NCP	0.4.0.2042.1.1
		NCP+	0.4.0.2042.1.2
		LCP	0.4.0.2042.1.3

Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
LuxTrust Certifica	tion Practice Statements	_						
	1		0 (master)		x	у	1.3.171.1.1. 1.1.0.x.y	N/A
	CPS Summary							N/A
		0	Not Used		N/A	N/A	not used	N/A
		1	First document		x	у	1.3.171.1.1. 1.2.1.x.y	N/A
	2 Full CPS GTE Chain	2	Second document		x	у	1.3.171.1.1. 1.2.2.x.y	N/A
		3	Third document		x	у	1.3.171.1.1. 1.2.3.x.y	N/A
		4	Fourth document		x	у	1.3.171.1.1. 1.2.4.x.y	N/A
			etc.		x	у	1.3.171.1.1. 1.2.5.x.y	N/A
1		0	0 Reserved		N/A			N/A
CPS LuxTrust		1	Reserved		N/A			N/A
		2	LuxTrust Global Root CA		x	у	1.3.171.1.1. 1.10.2.x.y	N/A
		3	LuxTrust Global Qualified CA		x	у	1.3.171.1.1. 1.10.3.x.y	N/A
	10	4	LuxTrust Privacy+ CA		x	у	1.3.171.1.1. 1.10.4.x.y	N/A
	CPS LuxTrust Global Root	5	LuxTrust SSL CA		x	у	1.3.171.1.1. 1.10.5.x.y	N/A
		6	LuxTrust TEST CA		x	у	1.3.171.1.1. 1.10.6.x.y	N/A
		7	LuxTrust Internal CA		x	у	1.3.171.1.1. 1.10.7.x.y	N/A
		8	LuxTrust Global Timestamping CA		x	у	1.3.171.1.1. 1.10.8.x.y	N/A
		9	LuxTrust eGovernment CA		x	у	1.3.171.1.1. 1.10.9.x.y	N/A
LuxTrust Certific	ate Policies							
10 CP's LuxTrust Global	1 Reserved							N/A
Chain	2 Reserved							N/A

Page 21 de 98



VERSION 1.16

Document category	Document	ument Sub-document - description		LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
		0	Master document	N/A	x	у	1.3.171.1.1.10.3.0.x.y	N/A
		1	QCP+ supporting Advanced Electronic Signature with Qualified Certificate issued on SSCD (for Natural Persons)		-	-	1.3.171.1.1.10.3.1	0.4.0.1456.1.1
		2	NCP+ supporting Authentication & Encryption for Natural Persons	SmartCard PRI/PRO Authentication Certificate	-	-	1.3.171.1.1.10.3.2	0.4.0.2042.1.2
		3	QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons)	Signing Stick PRI/PRO Signature Certificate	-	-	1.3.171.1.1.10.3.3	0.4.0.1456.1.2
		4	NCP Authentication & Encryption	Signing Stick PRI/PRO Authentication Certificate	-	-	1.3.171.1.1.10.3.4	0.4.0.2042.1.1
	3	5	NCP Authentication, Encryption & Signature [LuxTrust Signing Server]	Signing Server Certificate	-	-	1.3.171.1.1.10.3.5	0.4.0.2042.1.1
	LuxTrust Global Qualified CA Certificates issued to Natural Persons	6	NCP+ supporting AdES for Mass Signature Services	Mass Signature Service signature Certificate	-	-	1.3.171.1.1.10.3.6	0.4.0.2042.1.1
		7	LuxTrust LCP+ supporting Electronic Signature For Integration purposes.	Integration SmartCard Signature Certificate	-	-	1.3.171.1.1.10.3.7	0.4.0.2042.1.3
		8	LuxTrust LCP+ certificate supporting Signature, Authentication & Encryption for Integration purposes	Integration SmartCard Authentication Certificate	-	-	1.3.171.1.1.10.3.8	0.4.0.2042.1.3
		9	LuxTrust LCP Certificates supporting Signature, Authentication & Encryption for integration purposes	Integration Signing Server Certificate	-	-	1.3.171.1.1.10.3.9	0.4.0.2042.1.3
		10	QCP+ supporting Advanced Electronic Signature with Qualified Certificate issued on SSCD (for Natural Persons) for Natural	SmartCard LORA Signature Certificate	-	-	1.3.171.1.1.10.3.10	0.4.0.1456.1.1

Page 22 de 98



VERSION 1.16

Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
			Persons for LRAO Purposes					
		11	NCP+ supporting Authentication & Encryption for Natural Persons for LRAO Purposes	SmartCard LORA Authentication Certificate	-	-	1.3.171.1.1.10.3.11	0.4.0.2042.1.2
		12	QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons) for Mass LRAO Signatures [1.3.171.1.1.10.3.12]	Mass LRAO Signature Certificate	-	-	1.3.171.1.1.10.3.12	0.4.0.1456.1.2
		13	NCP+ supporting Advanced Electronic Seal Signature Services	Seal Signature Services	-	-	1.3.171.1.1.10.3.13	0.4.0.1456.1.2
		0	Master document		x	у	1.3.171.1.1.10.4.0.x.y	N/A
		1	LCP for SPARE certificates for QCP+ Certificates supporting Qualified Electronic Signature (for Natural Persons)	SmartCard SPARE Signature certificate	-	-	1.3.171.1.1.10.4.1	0.4.0.2042.1.3
		2	LCP for SPARE certificates for NCP+ Supporting Authentication & Encryption for Natural Persons	SmartCard SPARE Authentication Certificate	-	-	1.3.171.1.1.10.4.2	0.4.0.2042.1.3
	4 LuxTrust Privacy+ CA	3	LCP for SPARE certificates for QCP Supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons)	Signing Stick SPARE Signature Certificate	-	-	1.3.171.1.1.10.4.3	0.4.0.2042.1.3
10		4	LCP for SPARE certificates for NCP Supporting Authentication & Encryption for Natural Persons	Signing Stick SPARE Authentication Certificate	-	-	1.3.171.1.1.10.4.4	0.4.0.2042.1.3
CP's LuxTrust Global Chain		5	LCP for SPARE certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons	Signing Server SPARE certificate	-	-	1.3.171.1.1.10.4.5	0.4.0.2042.1.3
		6	Privacy+ certificate supporting Signature, Authentication & Encryption for Anonymous persons	Signing Server Privacy+ Certificate	-	-	1.3.171.1.1.10.4.6	

IVY Building 13-15 Parc d'activités L-8308 Capellen | TVA LU20976985 | RCS: B112233 | Phone: +352 26 68 15 - 1 | Fax: +352 26 68 15 - 789 | info@luxtrust.lu

www.luxtrust.lu



VERSION 1.16

Document category	Document		ent Sub-document - description		Version	Sub- version	Complete OID	ETSI OID
		0	Master document	N/A	x	У	1.3.171.1.1.10.5.0.x.y	N/A
		1	SSL/TLS Standard Server Certificates	SSL/TLS Standard Server Certificates	-	-	1.3.171.1.1.10.5.1	0.4.0.2042.1.3
	5 LuxTrust SSL CA	2	SSL/TLS(+) Extended Validation Server Certificates - EVCP	SSL/TLS Extended Validation Server Certificates	-	-	1.3.171.1.1.10.5.2	0.4.0.2042.1.4
		3	SSL/TLS(+) Extended Validation Server Certificates - EVCP+	SSL/TLS Extended Validation Server Certificates on Secure Device	-	-	1.3.171.1.1.10.5.3	0.4.0.2042.1.5
		4	Object Signing(+) Certificates	Object Signing(+) Certificates	-	-	1.3.171.1.1.10.5.4	0.4.0.2042.1.3
		5	SSL/TLS Client Certificate	SSL/TLS Client Certificate			1.3.171.1.1.10.5.5	0.4.0.2042.1.3
		0	Master document	N/A	x	у	1.3.171.1.1.10.6.0	N/A
		1	LCP for TEST certificates for QCP+ certificates supporting Qualified Electronic Signature (for Natural Persons)		-	-	1.3.171.1.1.10.6.1	0.4.0.2042.1.3
	6 LuxTrust TEST CA	2	LCP for TEST certificates for LuxTrust Signing Server, NCP certificate supporting Signature, Authentication & Encryption for Natural Persons		-	-	1.3.171.1.1.10.6.2	0.4.0.2042.1.3
		3	LCP for TEST certificates for NCP+ Supporting Authentication & Encryption for Natural Persons		-	-	1.3.171.1.1.10.6.3	0.4.0.2042.1.3
		4	LCP for TEST certificates for NCP Supporting Authentication & Encryption for Natural Persons		-	-	1.3.171.1.1.10.6.4	0.4.0.2042.1.3
		5	LCP for TEST certificates for QCP supporting Advanced Electronic Signature with a Qualified Certificate (for Natural Persons)		-	-	1.3.171.1.1.10.6.5	0.4.0.2042.1.3
		6	LCP for TEST certificates supporting Advanced		-	-	1.3.171.1.1.10.6.6	0.4.0.2042.1.3

Page 24 de 98

IVY Building 13-15 Parc d'activités L-8308 Capellen | TVA LU20976985 | RCS: B112233 | Phone: +352 26 68 15 - 1 | Fax: +352 26 68 15 - 789 | info@luxtrust.lu



Document category	Document		Sub-document - description	LuxTrust Product	Version	Sub- version	Complete OID	ETSI OID
			Electronic Signature with a Qualified Certificate					
			for Mass Signature Services					
		0	Master document	N/A	x	у	1.3.171.1.1.10.7.0	N/A
	7 LuxTrust Internal CA	1	QCP+ supporting Qualified Electronic Signature (for Natural Persons)	RA SmartCard Signature certificate	-	-	1.3.171.1.1.10.7.1	0.4.0.1456.1.2
		2	NCP+ supporting Authentication & Encryption for Natural Persons	RA SmartCard Authentication certificate	-	-	1.3.171.1.1.10.7.2	0.4.0.2042.1.2
		0	Master document	N/A			1.3.171.1.1.10.8.0	N/A
	8 LuxTrust Global	J	LuxTrust Trusted TimeStamping certificate	LuxTrust Trusted TimeStamping certificate			1.3.171.1.1.10.8.1	
	Timestamping CA 2	Third Party TimeStamping certificate	Third Party TimeStamping certificate			1.3.171.1.1.10.8.2		
	8 (0	Master document	N/A			1.3.171.1.1.10.9.0	N/A
	LuxTrust eGovernment CA			Reserved for future us	e			

3.2 LuxTrust Certification Authorities – Certificates profiles

LuxTrust certificates are X.509 v3, compliant with RFC 5280.

LuxTrust CAs certificate profiles description is available as follows:

3.2.1 LuxTrust Global Root CA

	Lux	Trust Gl	obal Roo	t CA	
Base Profile	OID	Included	Critical	Value	
Version		х		V3	
SerialNumber		х		As provided by CA or by LuxTrust S.A.	
SignatureAlgorithm					
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing CA Signature	
Validity					
NotBefore		x		Key Generation Process Date/Time	
NotAfter		x		Key Generation Process Date/Time + 10 years	Fixed
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed
organizationName		x		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust Global Root x ²	Fixed
organizationName		х		LuxTrust S.A.	Fixed
KeyUsage	{id-ce 15}	х	TRUE⁵		
CertificateSigning				Set	Fixed
crlSigning				Set	Fixed
authorityKeyIdentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash	
subjectKeyIdentifier	{id-ce 14}	х	FALSE		
Keyldentifier		х		SHA-1 Hash	

 $^{^{2}}$ X is a sequential value to distinguish the old CA from the renewed CA. The value 1 is omitted as it is the first CA issued.

drust li



VERSION 1.16

	Lux	Trust Glo	obal Roo	t CA	
Base Profile	OID	Included	Critical	Value	
BasicConstraints	{id-ce 19}	х	TRUE⁵		
CA		х		TRUE	Fixed
pathLenConstraint		Х		None	Fixed

3.2.2 LuxTrust Global Qualified CA

	LuxT	rust Glob	al Qualif	ied CA	
Base Profile	OID	Included	Critical	Value	
Version		х		V3	
SerialNumber		х		As provided by CA or by LuxTrust S.A.	
SignatureAlgorithm					
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing LTGRCA Signature	
Validity					
NotBefore		х		Key Generation Process Date/Time	
NotAfter		х		Key Generation Process Date/Time +up to 6;7 years	Fixed
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).	
lssuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust Global Qualified CA x ³	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.10.3	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier	CPSuri	х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE⁵		
keyCertSign				Set	Fixed

 $^{^3}$ X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.16

	LuxTr	ust Glob	al Qualif	ied CA	
Base Profile	OID	Included	Critical	Value	
crlSign				Set	Fixed
authorityKeyIdentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Authority public key	
subjectKeyIdentifier	{id-ce 14}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Subject public key	
cRLDistributionPoints	{id-ce 31}	х	FALSE		
distributionPoint					
FullName		х		http://crl.luxtrust.lu/LTGRCAx ⁴ .crl	Fixed
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/A	
CA		х		TRUE	Fixed
pathLenConstraint		х		0 (Zero)	Fixed

3.2.3 LuxTrust Privacy+ CA

LuxTrust Privacy+ CA						
Base Profile	OID	Included	Critical	Value		
Version		х		V3		
SerialNumber		х		As provided by CA or by LuxTrust S.A.		
SignatureAlgorithm						
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed	
SignatureValue		х		Issuing LTGRCA Signature		
Validity						
NotBefore		х		Key Generation Process Date/Time		
NotAfter		Х		Key Generation Process Date/Time +up to 6 years	Fixed	
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).		
Issuer						
CountryName	{ id-at-6 }	х		LU	Fixed	
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed	
organizationName		х		LuxTrust S.A.	Fixed	
Subject						
CountryName	{ id-at-6 }	х		LU	Fixed	

 $^{^4}$ X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued

⁵ Criticality of this extension should be carefully considered with regards to the compliance with RFC 5280 stating in its section 4.2.1.10 that "*This extension MUST appear as a critical extension in all CA certificates that contain public keys used to validate digital signatures on certificates. This extension MAY appear as a critical or non-critical extension in CA certificates that contain public keys used exclusively for purposes other than validating digital signatures on certificates".*



VERSION 1.16

	L	uxTrust P	rivacy+	CA	
Base Profile	OID	Included	Critical	Value	
CommonName	{ id-at-3 }			LuxTrust Privacy+ CA x ⁶	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.1.10.4	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier		х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE⁵		
keyCertSign				Set	Fixed
crlSign				Set	Fixed
authorityKeyIdentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Authority public key	
subjectKeyldentifier	{id-ce 14}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Subject public key	
cRLDistributionPoints	{id-ce 31}	х	FALSE		
distributionPoint					
FullName		х		http://crl.luxtrust.lu/LTGRCAx ⁴ .crl	Fixed
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/a	
CA		х		TRUE	Fixed
pathLenConstraint		Х		0 (Zero)	Fixed

3.2.4 LuxTrust SSL CA

	LuxTrust SSL CA							
Base Profile	OID	Included	Critical	Value				
Version		х		V3				
SerialNumber		х		As provided by CA or by LuxTrust S.A.				
SignatureAlgorithm								
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed			
SignatureValue		х		Issuing LTGRCA Signature				
Validity								
NotBefore		х		Key Generation Process Date/Time				
NotAfter		Х		Key Generation Process Date/Time +up to 6 years	Fixed			
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).				

 6 X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.16

		LuxTrus	t SSL CA		
Base Profile	OID	Included	Critical	Value	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust SSL CA x ⁷	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.1.10.5	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier		х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE⁵		
keyCertSign				Set	Fixed
crlSign				Set	Fixed
authorityKeyIdentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Authority public key	
subjectKeyldentifier	{id-ce 14}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Subject public key	
cRLDistributionPoints	{id-ce 31}	х	FALSE		
distributionPoint					
FullName		х		http://crl.luxtrust.lu/LTGRCAx ⁴ .crl	Fixed
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/a	
CA		х		TRUE	Fixed
pathLenConstraint		Х		0 (Zero)	Fixed

3.2.5 LuxTrust TEST CA

LuxTrust TEST CA								
Base Profile	OID	Included	Critical	Value				
Version		х		V3				
SerialNumber		х		As provided by CA or by LuxTrust S.A.				
SignatureAlgorithm								

 $^{^{7}}$ X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.

luxtrust l

IVY Building 13-15 Parc d'activités L-8308 Capellen | TVA LU20976985 | RCS: B112233 | Phone: +352 26 68 15 - 1 | Fax: +352 26 68 15 - 789 | info@luxtrust.lu



		LuxTrust	TEST CA		
Base Profile	OID	Included	Critical	Value	
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing LTGRCA Signature	
Validity					
NotBefore		х		Key Generation Process Date/Time	
NotAfter		х		Key Generation Process Date/Time +up to 6 years	Fixed
SubjectPublicKeyInfo		x		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust TEST CA x ⁸	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.1.10.6	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier		х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	х	TRUE⁵		
keyCertSign				Set	Fixed
crlSign				Set	Fixed
authorityKeyldentifier	{id-ce 35}	х	FALSE		
Keyldentifier		х		SHA-1 Hash of Authority public key	
subjectKeyldentifier	{id-ce 14}	х	FALSE		
Keyldentifier		Х		SHA-1 Hash of Subject public key	
cRLDistributionPoints	{id-ce 31}	х	FALSE		
distributionPoint					
FullName		х		http://crl.luxtrust.lu/LTGRCA ⁴ .crl	Fixed
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/A	
CA		х		TRUE	Fixed
pathLenConstraint		х		0 (Zero)	Fixed

 $^{^{8}}$ X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.

3.2.6 LuxTrust Internal CA

	LuxTrust Internal CA							
Base Profile	OID	Included	Critical	Value				
Version		х		V3				
SerialNumber		х		As provided by CA or by LuxTrust S.A.				
SignatureAlgorithm								
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed			
SignatureValue		х		Issuing LTGRCA Signature				
Validity								
NotBefore		х		Key Generation Process Date/Time				
NotAfter		х		Key Generation Process Date/Time +up to 6 years	Fixed			
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).				
Issuer								
CountryName	{ id-at-6 }	х		LU	Fixed			
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed			
organizationName		х		LuxTrust S.A.	Fixed			
Subject								
CountryName	{ id-at-6 }	х		LU	Fixed			
CommonName	{ id-at-3 }			LuxTrust Internal CA x9	Fixed			
organizationName		х		LuxTrust S.A.	Fixed			
CertificatePolicies	{id-ce 32}	Х	FALSE					
policyIdentifier		х		1.3.171.1.1.10.7	Fixed			
policyQualifiers				N/a				
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed			
Qualifier		х		https://repository.luxtrust.lu	Fixed			
KeyUsage	{id-ce 15}	х	TRUE⁵					
keyCertSign				Set	Fixed			
crlSign				Set	Fixed			
digitalSignature				Set	Fixed			
nonRepudiation				Set	Fixed			
authorityKeyIdentifier	{id-ce 35}	х	FALSE					
Keyldentifier		х		SHA-1 Hash of Authority public key				
subjectKeyldentifier	{id-ce 14}	х	FALSE					
Keyldentifier		х		SHA-1 Hash of Subject public key				
cRLDistributionPoints	{id-ce 31}	х	FALSE					

 $^{^{9}}$ X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.16

LuxTrust Internal CA								
Base Profile	OID	Included	Critical	Value				
distributionPoint								
FullName		х		http://crl.luxtrust.lu/LTGRCA ⁴ .crl	Fixed			
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/a				
CA		х		TRUE	Fixed			
pathLenConstraint		Х		0 (Zero)	Fixed			

3.2.7 LuxTrust TSA (Timestamping) CA

	LuxTrus	t Global 1	Timestar	nping CA	
Base Profile	OID	Included	Critical	Value	
Version		х		V3	
SerialNumber		х		As provided by CA or by LuxTrust S.A.	
SignatureAlgorithm					
Algorithm	1.2.840.113549.1.1.11	х		SHA256 with RSA Encryption	Fixed
SignatureValue		х		Issuing LTGRCA Signature	
Validity					
NotBefore		х		Key Generation Process Date/Time	
NotAfter		Х		Key Generation Process Date/Time +up to 10 years	Fixed
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).	
Issuer					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed
organizationName		х		LuxTrust S.A.	Fixed
Subject					
CountryName	{ id-at-6 }	х		LU	Fixed
CommonName	{ id-at-3 }			LuxTrust Global Timestamping CA \mathbf{x}^{10}	Fixed
organizationName		х		LuxTrust S.A.	Fixed
CertificatePolicies	{id-ce 32}	х	FALSE		
policyIdentifier		х		1.3.171.1.1.1.10.8	Fixed
policyQualifiers				N/a	
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed
Qualifier		х		https://repository.luxtrust.lu	Fixed
KeyUsage	{id-ce 15}	Х	TRUE⁵		
keyCertSign				Set	Fixed
crlSign				Set	Fixed

 10 X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.16

	LuxTrust Global Timestamping CA							
Base Profile	OID	Included	Critical	Value				
authorityKeyldentifier	{id-ce 35}	х	FALSE					
Keyldentifier		х		SHA-1 Hash of Authority public key				
subjectKeyldentifier	{id-ce 14}	х	FALSE					
Keyldentifier		х		SHA-1 Hash of Subject public key				
cRLDistributionPoints	{id-ce 31}	х	FALSE					
distributionPoint								
FullName		х		http://crl.luxtrust.lu/LTGRCA ⁴ .crl	Fixed			
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/a				
CA		х		TRUE	Fixed			
pathLenConstraint		х		0 (Zero)	Fixed			

3.2.8 LuxTrust e-Government CA

LuxTrust eGovernment CA							
Base Profile	OID	Included	Critical	Value			
Version		х		V3			
SerialNumber		х		As provided by CA or by LuxTrust S.A.			
SignatureAlgorithm							
Algorithm	1.2.840.113549.1.1.11	Х		SHA256 with RSA Encryption	Fixed		
SignatureValue		Х		Issuing LTGRCA Signature			
Validity							
NotBefore		х		Key Generation Process Date/Time			
NotAfter		х		Key Generation Process Date/Time +up to 6 years	Fixed		
SubjectPublicKeyInfo		х		Public Key: Key length: 2048 up to 4096 bits (RSA); public exponent: Fermat-4 (=010001).			
Issuer							
CountryName	{ id-at-6 }	х		LU	Fixed		
CommonName	{ id-at-3 }	х		LuxTrust Global Root x ²	Fixed		
organizationName		Х		LuxTrust S.A.	Fixed		
Subject							
CountryName	{ id-at-6 }	Х		LU	Fixed		
CommonName	{ id-at-3 }			LuxTrust eGovernment CA x ¹¹	Fixed		
organizationName		х		LuxTrust S.A.	Fixed		
CertificatePolicies	{id-ce 32}	Х	FALSE				
policyIdentifier		Х		1.3.171.1.1.1.10.9	Fixed		
policyQualifiers				N/a			

 11 X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



VERSION 1.16

LuxTrust eGovernment CA							
Base Profile	OID	Included	Critical	Value			
policyQualifierId	{ id-qt-1 }	х		CPS	Fixed		
Qualifier		х		https://repository.luxtrust.lu	Fixed		
KeyUsage	{id-ce 15}	х	TRUE⁵				
keyCertSign				Set	Fixed		
crlSign				Set	Fixed		
digitalSignature				Set	Fixed		
nonRepudiation				Set	Fixed		
authorityKeyIdentifier	{id-ce 35}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Authority public key			
subjectKeyldentifier	{id-ce 14}	х	FALSE				
Keyldentifier		х		SHA-1 Hash of Subject public key			
cRLDistributionPoints	{id-ce 31}	х	FALSE				
distributionPoint							
FullName		х		http://crl.luxtrust.lu/LTGRCA ⁴ .crl	Fixed		
BasicConstraints	{id-ce 19}	х	TRUE⁵	N/a			
CA		х		TRUE	Fixed		
pathLenConstraint		Х		0 (Zero)	Fixed		

3.2.9 Certificate extensions

X.509 v3 extensions are supported and used as indicated in the Certificates profiles as described in the present document.

3.2.10 Algorithm object identifiers

Algorithms OID are conforming to IETF RFC 3279 and RFC 5280.

3.2.11 Name forms

Name forms are in the X.500 distinguished name form as implemented in RFC 3739.

3.2.12 Name constraints

Name constraints are supported as per RFC 5280.

3.2.13 Certificate policy object identifier

Certificate policy object identifiers are used as per RFC 3739.

3.2.14 Usage of Policy Constraints extension

Usage of Policy Constraints extension is supported as per RFC 5280.

3.2.15 Policy qualifiers syntax and semantics

The use of policy qualifiers defined in RFC 5280 is supported.

3.3 LuxTrust End-entity – Certificates profiles

3.3.1 Certificate profiles

Under the new LuxTrust Global root and associated CAs, multiple types of certificates will be issued.

For the purpose of integration with current devices such as the smartcard, the signing stick and signing server, the following five types of LuxTrust Certificates will be issued under the LuxTrust Global Qualified CA. They are respectively issued to three types of end-user devices according to the following:

- LuxTrust SSCD Smartcards: These physical user devices contain two certificates, associated to two different key pairs, according to two certificate policies
 - One LuxTrust QCP+¹² Qualified Certificate for Natural Persons for the purpose of creating qualified electronic signatures, under the Certificate Policy OID *1.3.171.1.1.10.3.1*, and
 - One LuxTrust NCP+¹³ certificate for Natural Persons for the purpose of data/entity authentication and encryption facilities, under the Certificate Policy OID *1.3.171.1.1.10.3.2*.
- LuxTrust non SSCD Signing Sticks: These physical user devices that are not considered as SSCD according to [1] (e.g., SIM type chips unless they can be certified as SSCD) contain two certificates, associated to two different key pairs, according to two certificate policies
 - One LuxTrust QCP¹² Qualified Certificate for Natural Persons for the purpose of creating advanced electronic signatures supported by a qualified certificate, under the Certificate Policy OID *1.3.171.1.10.3.3*, and
 - One LuxTrust NCP¹³ certificate for Natural Persons for the purpose of data/entity authentication and encryption facilities, under the Certificate Policy OID *1.3.171.1.10.3.4*.
- LuxTrust Signing Server Accounts (Virtual Smartcards): These centralised virtual user signature creation devices contain one certificate, associated to one key pair, according to one specific certificate policy
 - One LuxTrust NCP¹³ certificate for Natural Persons for the combined purposes of electronic signature, data/entity authentication and encryption facilities, under the Certificate Policy OID *1.3.171.1.1.10.3.5*.

For the purpose of enabling Web-based data communication conduits via the TLS/SSL protocols and for verifying the authenticity of executable code, the following types of LuxTrust Certificates will be issued under the LuxTrust SSL CA:

- LuxTrust SSL/TLS Standard Server Certificates: SSL compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy 1.3.171.1.10.5.1.
- LuxTrust SSL/TLS Extended Validation Server Certificates EVCP: SSL compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy *1.3.171.1.1.10.5.2.*
- LuxTrust SSL/TLS Extended Validation Server Certificates EVCP+: SSL compliant ETSI TS 102 042 [4] Certificate generated on Secure User Device, under the Certificate OID Policy 1.3.171.1.1.10.5.3.
- LuxTrust Object Signing (+) Certificates: Compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy 1.3.171.1.1.10.5.4.
- LuxTrust SSL/TLS Client Certificates: Compliant ETSI TS 102 042 [4] Certificate not on SSCD Hardware token, under the Certificate OID Policy 1.3.171.1.10.5.5.

¹² As defined by ETSI TS 101 456 (cf. [3]).

¹³ As defined in ETSI TS 102 042 (cf. [4]).

VERSION 1.16

3.3.2 Version number(s)

X.509 v3 is supported and used.

3.3.3 LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures

LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures are Qualified Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD QCP+ Certificates are compliant with and include the OID reference of the QCP+ certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.1; cf. [3]).

The usage purpose of these LuxTrust SSCD QCP+ Certificates is limited to sole authorised usage of supporting the creation of qualified electronic signatures. The LuxTrust SSCD QCP+ Certificates include the corresponding LuxTrust QCP+ OID, i.e., < OID 1.3.171.1.10.3.1>.

The following table provides the description of the fields for LuxTrust SSCD QCP+ Certificates.

	LuxTrust SSCD QCP+ Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value					
Base											
Profile											
Version		~	False								
					S	Version 3 Value = "2"					
SerialNumbe	r	~	False								
					FDV	Validated on duplicates.					
signatureAlg	orithm	~	False								
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with					
						RSA Encryption.					
signatureVal	signatureValue		False								
					D	Issuing CA Signature.					
Issuer		~	False		S						
	countryName	~			S	LU					
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸					
	organizationName	~			S	LuxTrust S.A.					
Validity	·	~	False								
	NotBefore	~			D	Certificate generation process date/time.					
	NotAfter	~			D	Certificate generation process date/time + 36					
						Months					
Subject		~	False								
	serialNumber	~		М	D	Serial Number as constructed by LRAO					
	commonName	~		М	D	PRO and PRIVATE products : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character.					

¹⁴ IN = Included: Attribute / field included within the certificate profile.

¹⁵ CE = Critical Extension.

¹⁶ O/M: O = Optional, M = Mandatory.

¹⁷ CO = Content: S = Static, D = Dynamic, F = Formatted by CA, V = Validated by CA.

¹⁸ X is a sequential value to distinguish the old CA and the renewed CA. The value 1 is omitted as it is the first CA issued.



	Lux	Frust SS	CD QO	CP+ Ce	rtifica	te Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	givenName	✓		М	D	PRO and PRIVATE products : Given name(s) as on ID card
	sumame	~		М	D	PRO and PRIVATE products : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)
	countryName	\checkmark		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address
	title	~		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	~		М	D	PRO products only : Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	PRO products only : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products: Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	PRO products only: Company/institution department or other information item
subjectPublic	KeyInfo	\checkmark	False			
	Algorithm	~				Public Key: Key length: 2048bit (RSA); public
	subjectPublicKey	\checkmark		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyl	dentifier	~	False			
	keyldentifier	✓				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfo	Access	~	False			



LuxTrust SSCD QCP+ Certificate Profile									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value			
	AccessMethod	✓ ✓				ld-ad-2			
	accessLocation	✓ ✓				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt			
	AccessMethod	~				Id-ad-1			
	accessLocation	~				http://ocsp.luxtrust.lu			
cRLDistribut	ionPoint	~	False						
	distributionPoint	~			S				
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl			
Subject Properties									
subjectAltNa	me	✓	False						
-	Rfc822Name	~		0	D	Certificate Holder's email address			
subjectKeylo	lentifier	✓	False						
	keyldentifier	✓			Fixed	The Key Identifier comprises a four-bit fie			
						with a 0100 value, followed by the lea			
						significant 60 bits of the SHA-1 hash of th			
						value or subjectPublicKey bit string (tag, n			
						including the length and number of unused b			
						string bits).			
Policy									
Properties									
keyUsage		~	True						
	digitalSignature	~			S	False			
	nonRepudiation	✓			S	True			
	keyEncipherment	~			S	False			
	dataEncipherment	✓			S	False			
certificatePo	-	✓	False		0				
	PolicyIdentifier	✓	1 4150			1.3.171.1.1.10.3.1			
	policyQualifierID	~			s				
		✓				Id-qt-1 (CPS)			
	qualifier	✓			S	https://repository.luxtrust.lu			
	policyQualifierID				S	Id-qt-2 (User Notice)			
	noticeNumbers	✓							
	DisplayText					LuxTrust Qualified Certificate on SSC			
						compliant with ETSI TS 101 456 QCP			
						certificate policy. Key Generation by CSP.			
						Sole Authorised Usage: Support of Qualifie			
						Electronic Signature.			
	PolicyIdentifier	✓				0.4.0.1456.1.1			
QualifiedCer	tificateStat								
	QcCompliance	~		М	S	0.4.0.1862.1.1			
	QcLimitValue			0	D	As provided by LuxTrust S.A. in complianc with [5]			
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in complianc with [5]			
	QcSSCD	✓		М	D	Set			

VERSION 1.16

3.3.4 LuxTrust SSCD NCP+ Certificates supporting Authentication & Encryption

LuxTrust SSCD NCP+ Certificates are Normalised Certificates issued on SSCD Hardware token such as LuxTrust Smartcard with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these LuxTrust SSCD NCP+ Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust SSCD NCP+ OID, i.e., **<OID 1.3.171.1.1.10.3.2>**.

The following table provides the description of the fields for the LuxTrust SSCD NCP+ Certificate type supporting Authentication and Encryption.

	LuxTrust SSCD NCP+ Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value					
Base Profile											
Version		~	False								
					S	Version 3 Value = "2"					
SerialNumber	ſ	~	False								
					FDV	Validated on duplicates.					
signatureAlgo	prithm	~	False								
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with					
						RSA Encryption.					
signatureValu	IE	~	False								
					D	Issuing CA Signature.					
issuer		~	False		S						
	countryName	~			S	LU					
	commonName	\checkmark			S	LuxTrust Global Qualified CA x ¹⁸					
	organizationName	~			S	LuxTrust S.A.					
Validity		~	False								
	NotBefore	~			D	Certificate generation process date/time.					
	NotAfter	~			D	Certificate generation process date/time + 36					
						Months					
subject		~	False								
	serialNumber	~		М	D	Serial Number as constructed by LRAO					
						PRO and PRIVATE products: Concatenation					
	commonName	\checkmark		М	D	of given name(s) and surname(s) as on IL					
						card separated by a "Space" character					
	sh on Nome	~		5.4	5	PRO and PRIVATE products: Given name(s					
	givenName	v		М	D	as on ID card					
						PRO and PRIVATE products: Surname(s) as					
	surname	\checkmark		М	D	on ID card without indication "épouse", "ép." o					
						similar and the subsequent name(s)					
	countryName	1	1	м	D	Nationality of holder (ISO3166)					



	LuxT	rust S	SCD N	ICP+ Ce	rtifica	te Profile
Attribute	Field	IN 14	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	emailAddress	~		О	D	Subject's email address
						PRIVATE products: Fixed value: "Private Person" PRO products:
	title	~		М	D	<i>"Professional Person"</i> (default) or <i>"Professional Administrator"</i> (Other titles possible for special purpose certificates)
	organizationName	V		М	D	PRO products only : Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	PRO products only : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products: Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	PRO products only: Company/institution department or other information item
subjectPublic	KeyInfo	√	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyle	1	✓ 	False			
	keyldentifier	×				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfoA	ccess	✓	False			
	AccessMethod	✓				Id-ad-2
	accessLocation	✓ 				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	✓				ld-ad-1
	accessLocation	✓ 				http://ocsp.luxtrust.lu
cRLDistributio		✓ ✓	False			
	distributionPoint	✓ ✓			S	19
	fullName	v				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl



VERSION 1.16

						te Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Subject						
Properties						
subjectAltNar	ne	✓	False			
	Rfc822Name	✓		0	D	Certificate Holder's email address
subjectKeyIde	entifier	~	False			
	keyldentifier	\checkmark			Fixed	The Key Identifier comprises a four-bit field
						with a 0100 value, followed by the least
						significant 60 bits of the SHA-1 hash of the
						value or subjectPublicKey bit string (tag, no
						including the length and number of unused
						bit-string bits).
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	cies	~	False			
	Policyldentifier	~				1.3.171.1.1.10.3.2
	policyQualifierID	√			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on SSCD compliant with
						ETSI TS 102 042 NCP+ certificate policy. Key
						Generation by CSP.
						Sole Authorised Usage: Data or Entity
						Authentication and Data Encryption.
	PolicyIdentifier	✓			1	0.4.0.2042.1.2

3.3.5 LuxTrust non SSCD QCP Certificates supporting Advanced Electronic Signatures

LuxTrust non SSCD QCP Certificates are Qualified Certificates **not** issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust non SSCD QCP Certificates are compliant with and include the OID reference of the QCP certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.2; cf. [3]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a qualified certificate. These Certificates include the corresponding LuxTrust QCP OID, i.e., < OID 1.3.171.1.10.3.3>.

The following table provides the description of the fields for LuxTrust non SSCD QCP Certificates.



	LuxTrust non SSCD QCP Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value					
Base Profile											
Version		~	False								
					S	Version 3 Value = "2"					
SerialNumbe	ər	~	False								
					FDV	Validated on duplicates.					
signatureAlg	orithm	~	False								
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with RSA Encryption.					
signatureVal	ue	~	False								
					D	Issuing CA Signature.					
Issuer		~	False		S						
	countryName	~			S	LU					
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸					
	organizationName	~			S	LuxTrust S.A.					
Validity		~	False								
	NotBefore	~			D	Certificate generation process date/time.					
	NotAfter	~			D	Certificate generation process date/time + 36 Months					
Subject		~	False								
	serialNumber	~		М	D	Serial Number as constructed by LRAO					
	commonName	~		М	D	PRO and PRIVATE products : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character					
	givenName	~		М	D	PRO and PRIVATE products : Given name(s) as on ID card					
	surname	~		М	D	PRO and PRIVATE products : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)					
	countryName	~		М	D	Nationality of holder (ISO3166)					
	emailAddress	~		0	D	Subject's email address					



	LuxTi	r <mark>ust</mark> n	on SS	CD QCP	Certif	icate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	Title	~		М	D	 PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	~		М	D	PRO products only : Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	PRO products only : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products: Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	PRO products only: Company/institution department or other information item
subj	jectPublicKeyInfo	~	False			
	Algorithm subjectPublicKey	✓ ✓		М		Public Key: Key length: 2048 bit (RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority Pro	operties					
authorityKey	Identifier	√	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Qualified CA public key
authorityInfo	Access	✓	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu



						ficate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
cRLDistribu	tionPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Pro	perties					
subjectAltNa	ame	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyl	dentifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 6 bits of the SHA-1 hash of the value of subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Prop	erties					
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	blicies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.3
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Qualified Certificate not on SSC compliant with ETSI TS 101 456 QCP certificat policy. Key Generation by CSP. Sole Authorised Usage : Advanced Electroni Signature supported by a Qualified cert
	PolicyIdentifier	~				0.4.0.1456.1.2
QualifiedCe	rtificateStat					
	QcCompliance	✓		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance wit [5]



VERSION 1.16

	LuxTrust non SSCD QCP Certificate Profile									
Attribute	Field IN ¹⁴ CE ¹⁵ O/M ¹⁶				CO17	Value				
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance with [5]				
	QcSSCD	~				NOT SET				

3.3.6 LuxTrust non SSCD NCP Certificates supporting Authentication & Encryption

LuxTrust non SSCD NCP Certificates are Normalised Certificates **not** issued on SSCD Hardware token with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust non SSCD NCP Certificates are compliant with and include the OID reference of the NCP certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.1; cf. [4]).

The usage purpose of these NCP Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust non SSCD NCP OID, i.e., **<OID 1.3.171.1.10.3.4>**.

The following table provides the description of the fields for the LuxTrust non SSCD NCP Authentication and Encryption Certificate type.

	LuxTrust non SSCD NCP Certificate Profile									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value				
Base										
Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumb	er	~	False							
					FDV	Validated on duplicates.				
signatureAl	gorithm	~	False							
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256				
						with RSA Encryption.				
signatureVa	lue	~	False							
					D	Issuing CA Signature.				
issuer		~	False		S					
	countryName	~			S	LU				
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸				
	organizationName	✓			S	LuxTrust S.A.				
Validity		~	False							
	NotBefore	~			D	Certificate generation process date/time.				
	NotAfter	~			D	Certificate generation process date/time +				
						36 Months				
subject		~	False							
	serialNumber	~		М	D	Serial Number as constructed by LRAO				



VERSION 1.16

	LuxTrust	non S	SCD N	ICP Cer	tificat	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	commonName	*		М	D	PRO and PRIVATE products : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character
	givenName	~		М	D	PRO and PRIVATE products : Given name(s) as on ID card
	sumame	~		М	D	PRO and PRIVATE products : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address
	title	~		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	~		М	D	PRO products only: Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	PRO products only : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products: Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	PRO products only : Company/institution department or other information item
subjectPublic	cKeyInfo	✓	False			
	algorithm	✓ ✓				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						

Page 47 de 98



LuxTrust non SSCD NCP Certificate Profile									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value			
Authority									
Properties									
authorityKey	ldentifier	~	False						
	keyldentifier	~				SHA-1 Hash of the LuxTrust Qualified CA			
						public key			
authorityInfo	Access	~	False						
	AccessMethod	~				Id-ad-2			
	accessLocation	✓				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt			
	AccessMethod	~				Id-ad-1			
	accessLocation	~				http://ocsp.luxtrust.lu			
cRLDistribut	ionPoint	~	False						
	distributionPoint	~			S				
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl			
Subject									
Properties									
subjectAltNa	ame	✓	False						
	Rfc822Name	×		0	D	Certificate Holder's email address			
subjectKeylo	dentifier	~	False						
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bi			
						field with a 0100 value, followed by the			
						least significant 60 bits of the SHA-1 hash			
						of the value or subjectPublicKey bit string			
						(tag, not including the length and number			
						of unused bit-string bits).			
Policy									
Properties									
keyUsage	1	~	True						
	digitalSignature	~			S	True			
	n en Denudiation				0				
	nonRepudiation				S	False			
	keyEncipherment	✓			S	True			
	ReyEncipherment					The second secon			
	dataEncipherment	~			S	True			
certificatePo	licies	~	False						
	PolicyIdentifier	~				1.3.171.1.1.10.3.4			
	policyQualifierID	~			S	ld-qt-1 (CPS)			
	qualifier	~			S	https://repository.luxtrust.lu			
	policyQualifierID	~			S	Id-qt-2 (User Notice)			
	noticeNumbers								
	DisplayText	✓				LuxTrust Certificate not on SSCD			
						compliant with ETSI TS 102 042 NCF			
						certificate policy. Key Generation by CSP.			
						Sole Authorised Usage: Data or Entity			
						Authentication and Data Encryption.			

LuxTrust Global Root CA Certificate Specifications

VERSION 1.16

	LuxTrust non SSCD NCP Certificate Profile								
Attribute	Attribute Field IN ¹⁴ CE ¹⁵ O/M ¹⁶ CO ¹⁷ Value								
	PolicyIdentifier	~				0.4.0.2042.1.1			

3.3.7 LuxTrust Signing Server Account NCP Certificates supporting Signature, Authentication & Encryption

LuxTrust Signing Server Account NCP Certificates are Normalised Certificates **not** issued on SSCD Hardware token with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Signing Server Account NCP Certificates are compliant with and include the OID reference of the NCP certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.1; cf. [4]).

The usage purpose of these Certificates is for the combined purpose of electronic signature, authentication and encryption. These Certificates include the corresponding LuxTrust Signing Server Account NCP OID, i.e., **<OID 1.3.171.1.1.10.3.5>**.

The following table provides the description of the fields for the LuxTrust Signing Server Account NCP Signature, Authentication and Encryption Certificate type.

Note: Due to technical constraints within the Signing Server, the signature algorithm will be SHA1WithRsa instead of SHA256WithRsa.

	LuxTrust Signing Server NCP Certificate Profile									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value				
Base										
Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumb	er	~	False							
					FDV	Validated on duplicates.				
signatureAl	gorithm	~	False							
	algorithm				S	OID = "1.2.840.113549.1.1.5" - SHA1 with				
						RSA Encryption.				
signatureValue		~	False							
					D	Issuing CA Signature.				
Issuer		~	False		S					
	countryName	~			S	LU				
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸				
	organizationName	~			S	LuxTrust S.A.				
Validity		√	False							
	NotBefore	~			D	Certificate generation process date/time.				
	NotAfter	~			D	Certificate generation process date/time +				
						36 Months				
subject	1	✓	False							
	serialNumber	~		М	D	Serial Number as constructed by LRAO				



VERSION 1.16

	LuxTrust Sig	gning	Serve	r NCP C	Certific	ate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	commonName	*		М	D	PRO and PRIVATE products : Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character
	givenName	~		М	D	PRO and PRIVATE products : Given name(s) as on ID card
	sumame	~		М	D	PRO and PRIVATE products : Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	~		0	D	Subject's email address
	title	¥		М	D	PRIVATE products: Fixed value: "Private Person" PRO products: "Professional Person" (default) or "Professional Administrator" (Other titles possible for special purpose certificates)
	organizationName	¥		М	D	PRO products only: Name of company/institution as in articles of association or equivalent documents, including the legal form.
	localityName	~		М	D	PRO products only : Company/institution country of HQ (as in articles of association)
	organizationalUnitName 1	~		M for PRO prod., condi- tional (O) for PRIV prod.)	D	PRO products : Company/Institution VAT number (or if no VAT number available, other unique national company/institution identifier) PRIVATE products: If the holder is underage: "Mineur jusqu'à : " & (Date of birth + 18 years).
	organizationalUnitName 2	~		0	D	PRO products only : Company/institution department or other information item
subjectPublic	cKeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						

Page 50 de 98



	LuxTrust	Signing	Serve	r NCP (Certific	ate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Authority						
Properties						
authorityKe	yldentifier	✓	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Globa
						Qualified CA public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	√				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	√				Id-ad-1
	accessLocation	✓				http://ocsp.luxtrust.lu
cRLDistribu	tionPoint	√	False			
	distributionPoint	√			S	
	fullName	✓				http://crl.luxtrust.lu/LTGQCA ¹⁸ .crl
Subject						
Properties						
subjectAltNa	ame	✓	False			
	Rfc822Name	✓		0	D	Certificate Holder's email address
subjectKeyl		✓	False			
oubjoolitoyi	keyldentifier	✓	1 0100		Fixed	The Key Identifier comprises a four-b
	Koyldonanol				T IACU	field with a 0100 value, followed by th
						least significant 60 bits of the SHA-1 has
						of the value or subjectPublicKey bit strin
						(tag, not including the length and number
						of unused bit-string bits).
Policy						
Properties						
keyUsage		√	True			
Keyeeuge	digitalSignature	✓	nuc		S	True
	ugitalognature				5	1106
	nonRepudiation				S	True
	nonrepudiation				5	line
	kovEncinbormont	~			S	True
	keyEncipherment				3	Inde
	dete En einherment	√			6	True
	dataEncipherment				S	True
oortiGest-D		✓	Felei			
certificatePo		· · · · · · · · · · · · · · · · · · ·	False			
	PolicyIdentifier	· · · · · · · · · · · · · · · · · · ·				1.3.171.1.1.10.3.5
	policyQualifierID	· · · · · · · · · · · · · · · · · · ·			S	Id-qt-1 (CPS)
	qualifier	✓ ✓			S	https://repository.luxtrust.lu
	policyQualifierID	×			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate not on SSC
						compliant with ETSI TS 102 042 NC
						certificate policy. Key Generation by CSP.
						Sole Authorised Usage: Signature, Data of
						Entity Authentication and Data Encryption



VERSION 1.16

	LuxTrust Signing Server NCP Certificate Profile								
Attribute	ute Field IN ¹⁴ CE ¹⁵ O/M ¹⁶ CO ¹⁷ Value								
	Policyldentifier								

3.3.8 LuxTrust NCP+ Certificates supporting Mass Signature Services

LuxTrust NCP+ Certificates for Advanced Mass Signature Services are Normalised Certificates certified as generated on Secure User Device, with creation of the keys by the Subscriber, with 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Secure User Device NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a normalised certificate for Mass Signature purposes. These Certificates include the corresponding LuxTrust NCP+ OID, i.e., < OID 1.3.171.1.10.3.6>.

The following table provides the description of the fields for LuxTrust Secure User Device NCP+ Certificates.

Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Base Profile						
Version	·	~	False			
					S	Version 3 Value = "2"
SerialNumber		~	False			
					FDV	Validated on duplicates.
signatureAlgorithm		~	False			
	algorithm				S	<i>OID</i> = <i>"1.2.840.113549.1.1.11"</i>
						SHA256 with RSA Encryption
signatureValue		~	False			
					D	Issuing CA Signature.
Issuer		✓	False		S	
	countryName	✓			S	LU
	commonName	✓			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName	✓			S	LuxTrust S.A.
Validity		✓	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 36 Months
subject		~	False			
	commonName	~		М	D	Names as in articles of association including the legal form (as specified in the memorandum and articles o association or an equivalen document)
	countryName	v		М	D	Country in which the organization registered office is established (a specified in the memorandum an articles of association). (ISO3166)



Attribute						lass Signature Services
	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	stateOrProvinceName	~		0	D	
	emailAddress	✓		0	D	Subject's email address if available
	organizationName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	localityName	*		М	D	Location in which the organization's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	organizationalUnitName 1	~		О	D	As provided by Subscriber
	organizationalUnitName 2	~		о	D	As provided by Subscriber
subjectPublicKeyInfo	subjectPublicKeyInfo		False			
	algorithm	~				Public Key: Key length: 2048 bit
	subjectPublicKey	\checkmark		М		(RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyIdentifier		~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfoAccess		~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	√				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
cRLDistributionPoint		~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Properties						
subjectAltName		✓ 	False			
	Rfc822Name	✓ √		0	D	Certificate Holder's email address
subjectKeyIdentifier		✓ ✓	False			
	keyldentifier	v			Fixed	The Key Identifier comprises a four- bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).



VERSION 1.16

LuxTrust nor	n SSCD NCP+ Publi	c Cert	ificate	e Profil	e for M	lass Signature Services
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation				S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePolicies	certificatePolicies		False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.6
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	ld-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on Secure User
						Device compliant with ETSI TS 102
						042 NCP+ certificate policy. Key
						Generation by CSP.
						Sole Authorised Usage: Advanced
						electronic massive signature
						services.
						GTC, CP and CPS on
						http://repository.luxtrust.lu.
	PolicyIdentifier	~				0.4.0.2042.1.2

3.3.9 LuxTrust SSCD LCP+ Integration Certificates supporting Electronic Signatures

LuxTrust SSCD LCP+ Certificates supporting Qualified Signatures are Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD LCP+ Certificates are compliant with and include the OID reference of the LCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

The usage purpose of these LuxTrust SSCD LCP+ Certificates is limited to sole authorised usage of supporting the creation of Integration electronic signatures for system integration purposes with non-repudiation signatures. The LuxTrust SSCD LCP+ Certificates include the corresponding LuxTrust OID, i.e., < OID 1.3.171.1.10.3.7>.

The following table provides the description of the fields for LuxTrust SSCD LCP Certificates.

	LuxTrust SSCD LCP+ Integration Certificate Profile								
Attribute	Attribute Field IN ¹⁴ CE ¹⁵ O/M ¹⁶ CO ¹⁷ Value								
Base									
Profile									
Version		\checkmark	False						



VERSION 1.16

	LuxTrus	st SSCD	LCP+ I	ntegra	tion Ce	ertificate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
					S	Version 3 Value = "2"
SerialNumbe	ər	~	False			
					FDV	Validated on duplicates.
signatureAlg	orithm	~	False			
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 wit
						RSA Encryption.
signatureVal	ue	~	False			
-					D	Issuing CA Signature.
Issuer		~	False		S	
	countryName	✓			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName	✓			S	LuxTrust S.A.
Validity	organization tanto	✓	False			
· undity	NotBefore	✓			D	Certificate generation process date/time.
	NotAfter	✓			D	Certificate generation process date/time + 3
	NOLAILEI				D	Months
Cubicat		✓	Falsa			Monuns
Subject			False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
						LGQCA XX SC PRI V3 (XX a number selecte
	commonName	~		М	D	internally by LuxTrust)
	givenName	~		М	D	LGQCA XX (XX a number selected internally b
	givenivanie					LuxTrust)
	surname	~		М	D	SC PRI V3
					_	
	countryName	~		М	D	LU
	emailAddress	✓		0	D	N/A
						Diferée Demon
	title	✓ ✓		М	D	Private Person
subjectPublic	cKeyInfo	~	False			
	Algorithm	~				Public Key: Key length: 2048bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						
authorityKey	Identifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified
						CA public key
authorityInfo	Access	~	False			
	AccessMethod	~				Id-ad-2
	accessLocation	✓				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	~				Id-ad-1
	accessLocation	✓	-			http://ocsp.luxtrust.lu
cRLDistributi		✓	False			
		✓	raise		6	
	distributionPoint	· ·			S	
	fullName					http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl

Page 55 de 98



VERSION 1.16

	LuxTrus	t SSCD	LCP+ 1	ntegra	tion Co	ertificate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Subject						
Properties						
subjectAltNa	ime	~	False			
	Rfc822Name	~		0	D	N/A
subjectKeyld	lentifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with
						a 0100 value, followed by the least significan
						60 bits of the SHA-1 hash of the value o
						subjectPublicKey bit string (tag, not including
						the length and number of unused bit-string bits)
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.7
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust INTEGRATION CERTIFICATE or
						SSCD compliant with ETSI TS 102 042 LCP+
						certificate policy. Key Generation by CSP. Sole
						Authorised Usage: Support of Integration
						Electronic Signature.
	PolicyIdentifier	~				0.4.0.2042.1.3
QualifiedCer						
	QcCompliance	~		0	S	Not Set
	QcLimitValue	~		0	D	Not Set
	QcRetentionPeriod	~		0	D	Not Set
	QcSSCD	~		М	D	Set

3.3.10 LuxTrust SSCD LCP+ Integration Certificates supporting Authentication & Encryption

LuxTrust SSCD LCP+ Certificates are Normalised Certificates issued on SSCD Hardware token such as LuxTrust Smartcard with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD LCP+ Certificates are compliant with and include the OID reference of the LCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

The usage purpose of these LuxTrust SSCD LCP+ Certificates is for the combined purpose of authentication and encryption. These Certificates include the corresponding LuxTrust SSCD LCP+ OID, i.e., **<OID 1.3.171.1.10.3.8>**.



VERSION 1.16

The following table provides the description of the fields for the LuxTrust SSCD LCP+ Certificate type supporting Authentication and Encryption.

	LuxTrust	SSCD	LCP+ I	ntegra	tion Ce	ertificate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumber	ſ	✓	False			
					FDV	Validated on duplicates.
signatureAlgo	prithm	✓	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 wit
						RSA Encryption.
signatureValu	le	~	False			
					D	Issuing CA Signature.
issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName	~			S	LuxTrust S.A.
Validity	1	~	False			
	NotBefore	✓			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 3
						Months
subject		✓	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
						LCOCA XX SC PPI V/2 (XX a sumbas colorta
	commonName	~		М	D	LGQCA XX SC PRI V3 (XX a number selected internally by LuxTrust)
	givenName	✓		м	D	LGQCA XX (XX a number selected internall
	givenivanie			IVI		by LuxTrust)
	surname	~		М	D	SC PRI V3
	countryName	~		М	D	LU
	emailAddress	~		0	D	N/A
	title	~		М	D	Private Person
subjectPublic	KeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA); publi
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						
authorityKeyle	dentifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualifie
						CA public key
authorityInfoA	Access	~	False			
	AccessMethod	~				Id-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt

luxtrust l



VERSION 1.16

	LuxTrust	SSCD	LCP+ 1	integra	tion Ce	ertificate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
cRLDistributi	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Properties						
subjectAltNa	me	~	False			
	Rfc822Name	~		0	D	N/A
subjectKeyId	entifier	~	False			
	keyldentifier	✓			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value of subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePol	icies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.8
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust INTEGRATION CERTIFICATE or SSCD compliant with ETSI TS 102 042 LCP4 certificate policy. Key Generation by CSP. Sole Authorised Usage : Authentication and Encryption for Integration Purposes.
	PolicyIdentifier	✓	1			0.4.0.2042.1.3

3.3.11 LuxTrust Signing Server Account LCP Certificates supporting Signature, Authentication & Encryption for integration purposes

LuxTrust Signing Server Account NCP Certificates are Normalised Certificates **not** issued on SSCD Hardware token with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Signing Server Account LCP Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.3; cf. [4]).

Page 58 de 98

FLUXTPUST

VERSION 1.16

The usage purpose of these Certificates is for the combined purpose of electronic signature, authentication and encryption. These Certificates include the corresponding LuxTrust Signing Server Account OID, i.e., **<OID 1.3.171.1.10.3.9>**.

The following table provides the description of the fields for the LuxTrust Signing Server Account LCP Signature, Authentication and Encryption Certificate type.

Note: Due to technical constraints within the Signing Server, the signature algorithm will be SHA1WithRsa instead of SHA256WithRsa.

	LuxTrust	Signing	Serve	er LCP (Certific	ate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Base						
Profile						
Version	1	~	False			
					S	Version 3 Value = "2"
SerialNumbe	er	~	False			
					FDV	Validated on duplicates.
signatureAlg	orithm	~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.5" – SHA1 with
						RSA Encryption.
signatureVal	lue	~	False			
					D	Issuing CA Signature.
Issuer	1	✓	False		S	
	countryName	✓			S	LU
	commonName	✓			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName	✓			S	LuxTrust S.A.
Validity	T	✓	False			
	NotBefore	✓			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time +
		~				36 Months
Subject	1	~	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	LGQCA XX CSS (XX a number selected internally by LuxTrust)
	givenName	~		М	D	LGQCA XX (XX a number selected internally by LuxTrust)
	surname	~		М	D	CSS
	countryName	~		М	D	LU
	emailAddress	~		0	D	N/A
	title	~		М	D	Private Person
subjectPubli	cKeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						

Page 59 de 98



	LuxTrust Si	igning	Serve	er LCP (Certific	ate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
authorityKey	ldentifier	√	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
cRLDistribut	ionPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Properties						
subjectAltNa	me	✓	False			
	Rfc822Name	✓		0	D	N/A
subjectKeylo	dentifier	~	False			
	keyldentifier	✓ 			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	True
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePo	licies	✓	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.9
	policyQualifierID	√			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				INTEGRATION Certificate not on SSCD compliant with ETSI TS 102 042 LCP cert.policy. Key Generation by CSP. Sole Authorised Usage : Signature, Data or Entity Auth. and Data Enc. for integration purposes
	PolicyIdentifier	✓	1		1	0.4.0.2042.1.3



VERSION 1.16

3.3.12 LuxTrust Smartcard LORA Certificates supporting Signature for LRAO purposes

LuxTrust SSCD QCP+ Certificates supporting Qualified Signatures are Qualified Certificates issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD QCP+ Certificates are compliant with and include the OID reference of the QCP+ certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.1; cf. [3]).

The usage purpose of these LuxTrust SSCD QCP+ Certificates is limited to sole authorised usage of supporting the creation of qualified electronic signatures for LRAO purposes. The LuxTrust SSCD QCP+ Certificates include the corresponding LuxTrust QCP+ OID, i.e., < OID 1.3.171.1.1.10.3.10>.

The following table provides the description of the fields for LuxTrust SSCD LORA QCP+ Certificate Profile.

	LuxT	rust SSCD	LORA	QCP+	Certif	icate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Base						
Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumbe	er	✓	False			
					FDV	Validated on duplicates.
signatureAlg	jorithm	~	False			
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with
						RSA Encryption.
signatureVa	lue	~	False			
					D	Issuing CA Signature.
Issuer		✓	False		S	
	countryName	~			S	LU
	commonName	✓			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName	\checkmark			S	LuxTrust S.A.
Validity		\checkmark	False			
	NotBefore	√			D	Certificate generation process date/time.
	NotAfter	\checkmark			D	Certificate generation process date/time + 36
						Months
Subject		\checkmark	False			
	serialNumber	~		М	D	Serial Number as constructed by LRAO
						Concatenation of given name(s) and
	commonName	\checkmark		М	D	surname(s) as on ID card separated by a
						"Space" character.
	givenName	~		М	D	Given name(s) as on ID card
						Surname(s) as on ID card without indication
	surname	\checkmark		м	D	"épouse", "ép." or similar and the subsequen
						name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	✓		0	D	Subject's email address

Page 61 de 98



	LuxTru	st SSCD	LORA	QCP+	Certif	icate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	title	√		М	D	"LuxTrust RA Officer"
	organizationName	\checkmark		М	D	Constructed by LuxTrust
	localityName	\checkmark		М	D	Country of RA
	organizationalUnitName	\checkmark		М	D	RA code Constructed by LuxTrust
	organizationalUnitName 2	✓		М	D	RAO code Constructed by LuxTrust
subjectPublic	cKeyInfo	\checkmark	False			
•	Algorithm	√				Public Key: Key length: 2048bit (RSA); public
	subjectPublicKey	\checkmark		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKey	Identifier	√	False			
	keyldentifier	\checkmark				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfo	Access	\checkmark	False			
	AccessMethod	\checkmark				Id-ad-2
	accessLocation	\checkmark				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	\checkmark				ld-ad-1
	accessLocation	\checkmark				http://ocsp.luxtrust.lu
cRLDistributi	onPoint	\checkmark	False			
	distributionPoint	~			S	
	fullName	✓				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Properties						
subjectAltNa	me	~	False			
	Rfc822Name	✓ 		0	D	Certificate Holder's email address
subjectKeyId	entifier	✓ 	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy						
Properties						
keyUsage		\checkmark	True			
	digitalSignature	~			S	False
	nonRepudiation	~			S	True
	keyEncipherment	√			S	False
	dataEncipherment	\checkmark			S	False



VERSION 1.16

	LuxTr	ust SSCD	LORA	QCP+	Certif	icate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
certificatePo	blicies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.10
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Qualified Certificate on SSCD
						compliant with ETSI TS 101 456 QCP+
						certificate policy. Key Generation by CSP.
						Sole Authorised Usage: Support of Qualified
						Electronic Signature for LRAO purposes
	PolicyIdentifier	~				0.4.0.1456.1.1
QualifiedCe	rtificateStat					
	QcCompliance	~		М	S	0.4.0.1862.1.1
	QcLimitValue			0	D	As provided by LuxTrust S.A. in compliance
						with [5]
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance
						with [5]
	QcSSCD	~		М	D	Set

3.3.13 LuxTrust Smartcard LORA Certificates supporting Authentication & Encryption for LRAO purposes

LuxTrust SSCD NCP+ Certificates are Normalised Certificates issued on SSCD Hardware token such as LuxTrust Smartcard with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with a 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust SSCD NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these LuxTrust SSCD NCP+ Certificates is for the combined purpose of authentication and encryption for LRAO purposes. These Certificates include the corresponding LuxTrust SSCD NCP+ OID, i.e., **<OID 1.3.171.1.10.3.11>**.

The following table provides the description of the fields for the LuxTrust SSCD LORA NCP+ Certificate Profile type supporting Authentication and Encryption.

	LuxTrust SSCD LORA NCP+ Certificate Profile									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value				
Base Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumber		~	False							
					FDV	Validated on duplicates.				
signatureAlgo	rithm	~	False							
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with				
						RSA Encryption.				



					1	icate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
signatureValu	e	✓	False			
					D	Issuing CA Signature.
issuer		✓	False		S	
	countryName	√			S	LU
	commonName	✓ ✓			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName				S	LuxTrust S.A.
Validity		✓ ✓	False			
	NotBefore	✓ ✓			D	Certificate generation process date/time.
	NotAfter				D	Certificate generation process date/time + 3 Months
subject		✓	False			
	serialNumber	✓		М	D	Serial Number as constructed by LRAO
	commonName	~		М	D	Concatenation of given name(s) ar surname(s) as on ID card separated by "Space" character
	givenName	\checkmark		М	D	Given name(s) as on ID card
	sumame	~		М	D	Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequer name(s)
	countryName	~		М	D	Nationality of holder (ISO3166)
	emailAddress	\checkmark		0	D	Subject's email address
	title	~		М	D	"LuxTrust RA Officer"
	organizationName	✓		М	D	Constructed by LuxTrust
	localityName	~		М	D	Country of RA
	organizationalUnitName 1	~		М	D	RA code Constructed by LuxTrust
	organizationalUnitName 2	~		М	D	RAO code Constructed by LuxTrust
subjectPublic	KeyInfo	~	False			
	algorithm	√				Public Key: Key length: 2048 bit (RSA); publ
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeyl	dentifier	~	False			
	keyldentifier	\checkmark				SHA-1 Hash of the LuxTrust Global Qualifie CA public key
authorityInfoA	Access	√	False			
	AccessMethod	✓				Id-ad-2
	accessLocation	~			1	http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt



VERSION 1.16

	LuxTru	ist SSC	D LOR	A NCP+	Certif	ficate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
cRLDistributio	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject						
Properties						
subjectAltNar	ne	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeylde	entifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field
						with a 0100 value, followed by the least
						significant 60 bits of the SHA-1 hash of the
						value or subjectPublicKey bit string (tag, not
						including the length and number of unused
						bit-string bits).
Policy Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation				S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	cies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.3.11
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Certificate on SSCD compliant with
						ETSI TS 102 042 NCP+ certificate policy. Key
						Generation by CSP.
						Sole Authorised Usage: Data or Entity
						Authentication and Data Encryption for LRAO
						purposes.
	PolicyIdentifier	~				0.4.0.2042.1.2

3.3.14 LuxTrust non SSCD Mass LRAO QCP Certificates supporting Advanced Electronic Signatures

LuxTrust non SSCD QCP Certificates are Qualified Certificates **not** issued on SSCD, with creation of the keys by LuxTrust CSP according to the enrolment and issuing process and procedures described in the applicable CP, with 2048-bit key size and 3 years validity from issuing start date.

rust l



VERSION 1.16

These LuxTrust non SSCD QCP Certificates are compliant with and include the OID reference of the QCP certificate policy of the ETSI Technical Specifications 101 456 (i.e., 0.4.0.1456.1.2; cf. [3]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a qualified certificate for Mass LRAO Signature purposes. These Certificates include the corresponding LuxTrust QCP OID, i.e., < OID 1.3.171.1.10.3.12>.

The following table provides the description of the fields for LuxTrust non SSCD QCP Certificates.

	LuxTrust non SSCD QCP Mass LRAO Signatures Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value					
Base Profile											
Version		~	False								
					S	Version 3 Value = "2"					
SerialNumbe	r	~	False								
					FDV	Validated on duplicates.					
signatureAlg	orithm	~	False								
	Algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with RSA Encryption.					
signatureVal	ue	~	False								
					D	Issuing CA Signature.					
lssuer		~	False		S						
	countryName	~			S	LU					
	commonName	~			S	LuxTrust Global Qualified CA x^{18}					
	organizationName	~			S	LuxTrust S.A.					
Validity		~	False								
	NotBefore	~			D	Certificate generation process date/time.					
	NotAfter	~			D	Certificate generation process date/time + 36 Months					
Subject		~	False								
	serialNumber	~		М	D	Serial Number as constructed by LRAO					
	commonName	~		М	D	Concatenation of given name(s) and surname(s) as on ID card separated by a "Space" character					
	givenName	~		М	D	Given name(s) as on ID card					
	sumame	~		М	D	Surname(s) as on ID card without indication "épouse", "ép." or similar and the subsequent name(s)					
	countryName	~		М	D	Nationality of holder (ISO3166)					
	emailAddress	~		0	D	Subject's email address					



VERSION 1.16

	LuxTrust non SSC	CD QC	P Mas	s LRAO	Signa	tures Certificate Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	Title	~		м	D	"LuxTrust RA officer – LRS"
	organizationName	~		м	D	"RA" & RA number & " – " & Name of the LuxTrust RA
	localityName	~		М	D	Country of RA (as in articles of association)
	organizationalUnitName 1	~		М	D	RA code Constructed by LuxTrust
	organizationalUnitName 2	~		Ο	D	RAO code Constructed by LuxTrust
subj	jectPublicKeyInfo	~	False			
	Algorithm	~				Public Key: Key length: 2048 bit (RSA); public
	subjectPublicKey	~		М		exponent: Fermat-4 (=010001).
Extensions						
Authority Pro	operties					
authorityKey	Identifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Global Qualified CA public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
cRLDistributi	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Prop	perties					
subjectAltNa	me	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeyId	lentifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Prope	rties					

Page 67 de 98



VERSION 1.16

LuxTrust non SSCD QCP Mass LRAO Signatures Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value				
keyUsage		~	True							
	digitalSignature	~			S	False				
	nonRepudiation	~			S	True				
	keyEncipherment	~			S	False				
	dataEncipherment	~			S	False				
certificatePo	licies	~	False							
	PolicyIdentifier	~				1.3.171.1.1.10.3.12				
	policyQualifierID	~			S	Id-qt-1 (CPS)				
	qualifier	~			S	https://repository.luxtrust.lu				
	policyQualifierID	~			S	Id-qt-2 (User Notice)				
	noticeNumbers									
	DisplayText	~				LuxTrust Qualified Certificate not SSCD compliant with ETSI TS 101 456 QCP certificate policy. Key Generation by CSP.				
						Sole Authorised Usage: Support of Advanced Electronic Signature for Mass LRAO purposes				
	PolicyIdentifier	~				0.4.0.1456.1.2				
QualifiedCe	rtificateStat									
	QcCompliance	~		М	S	0.4.0.1862.1.1				
	QcLimitValue			Ο	D	As provided by LuxTrust S.A. in compliance with [5]				
	QcRetentionPeriod			0	D	As provided by LuxTrust S.A. in compliance with [5]				
	QcSSCD	~				NOT SET				

3.3.15 LuxTrust NCP+ Certificates supporting SEAL Signature Services

LuxTrust NCP+ Certificates for Advanced Seal Signature Services are Normalised Certificates certified as generated on Secure User Device, with creation of the keys by the Subscriber and LuxTrust, with 2048-bit key size and 3 years validity from issuing start date.

These LuxTrust Secure User Device NCP+ Certificates are compliant with and include the OID reference of the NCP+ certificate policy of the ETSI Technical Specifications 102 042 (i.e., 0.4.0.2042.1.2; cf. [4]).

The usage purpose of these Certificates is limited to sole authorised usage of supporting the creation of non-qualified (advanced) electronic signatures supported by a normalised certificate for Seal Signature purposes. These Certificates include the corresponding LuxTrust NCP+ OID, i.e., < OID 1.3.171.1.10.3.13>.

The following table provides the description of the fields for LuxTrust Secure User Device NCP+ Certificates.



LuxTrust nor	n SSCD NCP+ Publi	c Cert	ificate	Profile	e for N	lass Signature Services
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumber		√	False			
					FDV	Validated on duplicates.
signatureAlgorithm		~	False			
	algorithm				S	OID = "1.2.840.113549.1.1.11" -
						SHA256 with RSA Encryption
signatureValue		~	False			
					D	Issuing CA Signature.
Issuer		~	False		S	
	countryName	 ✓ 			S	LU
	commonName	~			S	LuxTrust Global Qualified CA x ¹⁸
	organizationName	~			S	LuxTrust S.A.
Validity	-	✓	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 36 Months
subject		✓	False			
	commonName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	countryName	V		М	D	Country in which the organization's registered office is established (as specified in the memorandum and articles of association). (ISO3166)
	stateOrProvinceName	~		0	D	
	emailAddress	~		0	D	Subject's email address if available
	organizationName	V		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	localityName	~		М	D	Location in which the organization's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	organizationalUnitName 1	~		0	D	As provided by Subscriber



VERSION 1.16

Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Attribute	Field	IN '4	CE®	0/м10	CO"	value
	organizationalUnitName 2	✓		0	D	As provided by Subscriber
subjectPublicKeyInfo		~	False			
	algorithm	~				Public Key: Key length: 2048 b
	subjectPublicKey	\checkmark		М		(RSA); public exponent: Fermat-
						(=010001).
Extensions						
Authority Properties						
authorityKeyIdentifier		✓ ✓	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust Globa Qualified CA public key
authorityInfoAccess		~	False			
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTGQCAx ¹⁸ .crt
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
cRLDistributionPoint		\checkmark	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTGQCAx ¹⁸ .crl
Subject Properties						
subjectAltName		~	False			
	Rfc822Name	 ✓ 		0	D	Certificate Holder's email address
subjectKeyIdentifier	1	√	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four
						bit field with a 0100 value, follower
						by the least significant 60 bits of the
						SHA-1 hash of the value of
						subjectPublicKey bit string (tag, no including the length and number of
						unused bit-string bits).
Policy Properties						
keyUsage		√	True			
reyusaye	digitalSignature	~	nue		S	True
					0	
	nonRepudiation				S	True
	·····				-	
	keyEncipherment	√			S	False
	···· /				-	
	dataEncipherment	~			S	False
	-					
certificatePolicies		~	False			
	PolicyIdentifier	√				1.3.171.1.1.10.3.13
	policyQualifierID	√			S	ld-qt-1 (CPS)
	qualifier	√			S	https://repository.luxtrust.lu
	policyQualifierID	√			S	Id-qt-2 (User Notice)
	noticeNumbers					

Page 70 de 98



VERSION 1.16

LuxTrust non SSCD NCP+ Public Certificate Profile for Mass Signature Services							
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value	
	DisplayText	~				LuxTrust Certificate on Secure User Device compliant with ETSI TS 102 042 NCP+ certificate policy. Key Generation by CSP. Sole Authorised Usage : Advanced electronic seal signature services. <i>GTC, CP and CPS on</i> http://repository.luxtrust.lu.	
	PolicyIdentifier	~				0.4.0.2042.1.2	

3.3.16 LuxTrust SSL/TLS Standard Server Certificates – LCP certificates supporting Signature, Authentication & Encryption

LuxTrust SSL/TLS Standard Server Certificates are ETSI TS 102 042 LCP Certificates not certified as generated on SSCD, with creation of the keys by the Subscriber, with 2048-bit key size and one (1) or three (3) years validity from issuing start date.

These LuxTrust SSL/TLS Standard Server Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.3).

The usage purpose of these LuxTrust SSL/TLS Standard Server Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust LCP Server Certificates include the corresponding LuxTrust LCP OID for SSL/TLS server certificates, i.e., <1.3.171.1.1.10.5.1>.

	LuxTrust SSL Server LCP Certificate Profile								
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value			
Base									
Profile									
Version		~	False						
					S	Version 3 Value = "2"			
SerialNumber		~	False						
					FDV	Validated on duplicates.			
signatureAlgorithm		~	False						
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256			
						with RSA Encryption.			
signatureVa	lue	~	False						
					D	Issuing CA Signature.			
issuer		~	False		S				
	countryName	~			S	LU			
	commonName	√			S	LuxTrust SSL CA x ¹⁸			
	organizationName	~			S	LuxTrust S.A.			
Validity	Validity		False						
	NotBefore	~			D	Certificate generation process date/time.			

The following table provides the description of the fields for LuxTrust Server Certificates.



LuxTrust SSL Server LCP Certificate Profile								
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value		
	NotAfter	✓			D	Certificate generation process date/time + 12;36 Months		
subject		~	False					
	countryName	~		М	D	Country in which the company's or institution's registered office is established (as specified in the memorandum and articles of association). (ISO3166)		
	stateOrProvinceName	~		0	D			
	localityName	~		М	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)		
	organizationName	~		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)		
	organizationalUnitName1	~		0	D	As provided by Subscriber		
	organizationalUnitName2	~		0	D	As provided by Subscriber		
	commonName	~		М	D	FQDN (Fully Qualified Domain Name) of application/server – Exact and full URL for a Web Server or IP address or unique name of server.		
	serialNumber	~		0	D	Serial Number as provided by subscriber		
	emailAddress	~		0	D	Subject's email address		
subjectPubli	cKeyInfo	~	False					
	algorithm	~				Public Key: Key length: 2048 bit (RSA);		
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).		
Extensions								
Authority Properties								
authorityKey	Identifier	~	False					
	keyldentifier	~				SHA-1 Hash of the LuxTrust SSL CA public key		
authorityInfo	Access	~	False					
	AccessMethod	~				ld-ad-1		
	accessLocation	√				http://ocsp.luxtrust.lu		
	AccessMethod	√				ld-ad-2		
	accessLocation	✓				http://ca.luxtrust.lu/LTSSLCAx ¹⁸ .crt		
cRLDistribut	ionPoint	✓ ✓	False					
	distributionPoint	✓ ✓	<u> </u>		S			
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx ¹⁸ .crl		



	LuxTrust	SSL Se	erver L	.CP Cer	tificat	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Subject						
Properties						
subjectAltNa	ame	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
				Ū		application/server – Exact DNS for a Web
		~				Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
		v				Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of
	SubjectAltName-dNSName			0		server. FQDN (Fully Qualified Domain Name) of
						application/server – Exact DNS for a Web
		✓				Server or IP address or unique name of
						server.
	SubjectAltName-dNSName			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact DNS for a Web
						Server or IP address or unique name of
						server.



	LuxTrust	SSL Se	erver L	.CP Cer	tificat	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server - Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second URL for a Web Server or IP address or
						unique name of server.
	SubjectAltNeme LIDI			0		FQDN (Fully Qualified Domain Name) of
	SubjectAltName-URL			0		application/server – Exact and full second
		~				URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
				Ū		application/server – Exact and full second
		~				URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		,				application/server – Exact and full second
		~				URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
		v				URL for a Web Server or IP address or
						unique name of server.
	SubjectAltName-URL			0		FQDN (Fully Qualified Domain Name) of
		~				application/server – Exact and full second
						URL for a Web Server or IP address or
						unique name of server.
subjectKeylo		✓ ✓	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit
						field with a 0100 value, followed by the
						least significant 60 bits of the SHA-1 hash
						of the value or subjectPublicKey bit string
						(tag, not including the length and number
						of unused bit-string bits).



VERSION 1.16

	LuxTr	ust SSL S	erver L	.CP Cer	tificat	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePo	blicies	✓	False			
	PolicyIdentifier	~				1.3.171.1.1.10.5.1
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust Standard SSL/TLS Server Certificate. Not supported by SSCD, Key Generation by Subscriber. GTC, CP and
						CPS on http://repository.luxtrust.lu. Signed by a SSL CA.
	PolicyIdentifier	✓				0.4.0.2042.1.3
Extended K	ey Usage	~	False			
	serverAuth	✓			S	True
	clientAuth	✓			S	True
	emailProtection	✓			S	True
Netscape Proprietary						
Netscape C	ertificate Type	~	False			
	SSL Client	✓			S	Set
	SSL Server	~			S	Set
	S/MIME	✓			S	Set

3.3.17 SSL/TLS Extended Validation Server Certificates – EVCP certificates supporting Signature, Authentication & Encryption

LuxTrust SSL/TLS Extended Validation Server Certificates (hereinafter EV SSL Certificates) are ETSI TS 102 042 EVCP Certificates, with creation of the keys by the Subscriber, with 2048-bit key size and one (1) or two (2) years validity from issuing start date.

These LuxTrust SSL/TLS Extended Validation Server Certificates are compliant with and include the OID reference of the EVCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.4).

VERSION 1.16

The usage purpose of these LuxTrust SSL/TLS Extended Validation Server Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust EVCP Server Certificates include the corresponding LuxTrust EVCP OID for SSL/TLS extended validation server certificates, i.e., <1.3.171.1.10.5.2>.

Appropriate Certificate uses:

The primary purposes of these Certificates are to:

- Identify the legal entity that controls a Web site: Provide a reasonable assurance to the user of an Internet browser that
 the Web site the user is accessing is controlled by a specific legal entity identified in the EV SSL Certificate by name,
 address of Place of Business, Jurisdiction of Incorporation or Registration and Registration Number or other
 disambiguating information; and
- Enable encrypted communications with a Web site: Facilitate the exchange of encryption keys in order to enable the encrypted communication of information over the Internet between the user of an Internet browser and a Web site.

The secondary purposes of these Certificates are to help establish the legitimacy of a business claiming to operate a Web site or distribute executable code, and to provide a vehicle that can be used to assist in addressing problems related to phishing, malware, and other forms of online identity fraud. By providing more reliable third-party verified identity and address information regarding the business, EV SSL Certificates may help to:

- Make it more difficult to mount phishing and other online identity fraud attacks using Certificates;
- Assist companies that may be the target of phishing attacks or online identity fraud by providing them with a tool to better identify themselves to users; and
- Assist law enforcement organizations in their investigations of phishing and other online identity fraud, including where appropriate, contacting, investigating, or taking legal action against the Subject.

Prohibited Certificate uses:

The EV SSL Certificates focus only on the identity of the Subject named in the Certificate, and not on the behavior of the Subject. As such, these Certificates are not intended to provide any assurances, or otherwise represent or warrant:

- That the Subject named in the EV SSL Certificate is actively engaged in doing business;
- That the Subject named in the EV SSL Certificate complies with applicable laws;
- That the Subject named in the EV SSL Certificate is trustworthy, honest, or reputable in its business dealings; or
- That it is "safe" to do business with the Subject named in the EV SSL Certificate.

Moreover, usages of EV SSL Certificates for other purposes than those identified in the present CP are prohibited.

Verification of Applicant's Legal Existence and Identity:

For EV SSL Certificates, Applicant's legal existence and identity are verified in compliance with the EV Guidelines [13]:

- For Private Organization Subjects:
 - i. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
 - ii. Verify the Applicant's Organization Name as stipulated in the EV Guidelines [13]);
 - iii. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);
 - iv. Verify the Applicant's Registered Agent as stipulated in the EV Guidelines [13]).
- For Government Entity Subjects:
 - i. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);



VERSION 1.16

ii. Verify the Applicant's Entity name as stipulated in the EV Guidelines [13]);

iii. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);

For EV SSL Certificates, LuxTrust SSL CA shall use a single naming convention as set forth in the EV Guidelines [13] and the Baseline Requirements [14] published by the CA/Browser Forum.

The following table provides the description of the fields for LuxTrust Server Certificates.

Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Base Profile						
Version		~	False			
					S	Version 3 Value = "2"
SerialNumbe	r	~	False		-	
					FDV	Validated on duplicates.
signatureAlgo	prithm	~	False			
0 0	algorithm				S	OID = "1.2.840.113549.1.1.11"
					_	SHA256 with RSA Encryption.
signatureValu	le	~	False			51
					D	Issuing CA Signature.
issuer	I	√	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust SSL CA x ¹⁸
	organizationName	~			S	LuxTrust S.A.
Validity	• ···	√	False			
•	NotBefore	~			D	Certificate generation process date/time
	NotAfter	~			D	Certificate generation process date/tim
						+ 12;24 Months
subject		√	False			
	countryName			м	D	Country in which the company's o
	-				5	institution's registered office i
	(OID: 2.5.4.6)	~				established (as specified in th
						memorandum and articles
						association). (ISO3166)
	jurisdictionOfIncorporationCount			М	D	Contains the country informatio
	ryName					specified using the applicable IS
	(OID: 1.3.6.1.4.1.311.60.2.1.3)					country code for the jurisdiction
		~				Incorporation for the Incorporation
						Agency or Jurisdiction of Registration for
						a Registration Agency that operates a
						the country level, at state/pr.
	stateOrProvinceName			М	D	State or Province in which th
	(OID: 2.5.4.8)					company's registered office
		~				established (as specified in th
						memorandum and articles of association
						or an equivalent document)



	SSL/TLS Exten	ded Va	alidati	on Ser	ver Ce	ertificates
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	jurisdisctionOfIncorporationState OrProvinceName (OID: 1.3.6.1.4.1.311.60.2.1.2)	*		0	D	Contains the jurisdiction for the applicable Incorporating Agency or Registration Agency at the state or province level MUST include both country and state or province information,
	localityName (2.5.4.7)	~		Σ	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	jurisdictionOfIncorporationLocalit yName (1.3.6.1.4.1.311.60.2.1.1)	~		0	D	Jurisdiction for the applicable Incorporating Agency or Registration Agency at the locality level MUST include the country and state or province information, where the state or province regulates the registration of the entities at the locality level, as well as the locality information.
	organizationName (OID: 2.5.4.10)	✓		Μ	D	Full legal organization name as listed in the official records of the Incorporating or Registration Agency in the Subject's Jurisdiction of Incorporation or Registration or as otherwise verified by the CA as provided herein.
	businessCategory (OID: 2.5.4.15)	~		Μ	D	Depending on the Subject qualifications, this field contains one of the following String: Private Organization Government Entity



	SSL/TLS Exten	ded Va	alidati	on Ser	ver C	ertificates
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	serialNumber			М	D	See EV Guidelines [13] :
	(OID: 2.5.4.5)	~				For Private Organizations, this field MUST contain the Registration (or similar) Number assigned to the Subject by the Incorporating or Registration Agency in its Jurisdiction of Incorporation or Registration, as appropriate. If the Jurisdiction of Incorporation or Registration does not provide a Registration Number, then the date of Incorporation or Registration SHALL be entered into this field in any one of the common date formats.
						verifiable date of creation, the CA SHALL enter appropriate language to indicate that the Subject is a Government Entity.
	postalCode (OID: 2.5.4.17)	✓		0	D	Postal code of the subject place of business.
	streedAddress (OID: 2.5.4.9)	~		0	D	Number and Street of the physical location of the subject
subjectPublic	KeyInfo	~	False			
	algorithm	~				Public Key: Key length: 2048 bit (RSA);
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKeylo	dentifier	~	False			
	keyldentifier	\checkmark				SHA-1 Hash of the LuxTrust SSL CA public key
authorityInfoA	ccess	~	False			
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
	AccessMethod	\checkmark				Id-ad-2
	accessLocation	\checkmark				http://ca.luxtrust.lu/LTSSLCAx ¹⁸ .crt
cRLDistributio	onPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx ¹⁸ .crl
Subject Properties						
subjectAltNan	ne	√	False			



	SSL/TLS Exten	ded Va	alidati	on Ser	ver Ce	ertificates
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	SubjectAltName-dNSName	~		Μ		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not
	SubjectAltName-dNSName	~		0		allowed for EV SSL Certificates. FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	¥		Ο		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.



VERSION 1.16

	SSL/TLS Exter	ded V	alidati	on Ser	ver C	ertificates
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by
						the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EV SSL Certificates.
subjectKeyIde	entifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits).
Policy Properties						
keyUsage		√	True			
	digitalSignature	~			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePoli	cies	✓	False			

Page 81 de 98



VERSION 1.16

	SSL/TLS Extended Validation Server Certificates										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value					
	PolicyIdentifier	~				1.3.171.1.1.10.5.2					
	policyQualifierID	~			S	Id-qt-1 (CPS)					
	qualifier	~			S	https://repository.luxtrust.lu					
	policyQualifierID	~			S	Id-qt-2 (User Notice)					
	noticeNumbers										
	DisplayText	V				ETSI TS 102 042 EVCP compliant certificate, produced by SSL CA, with creation of the keys by the Subscriber, 2048-bit key size, (1) or (2) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication.					
	PolicyIdentifier	~				0.4.0.2042.1.4					
Extended Key	/ Usage	\checkmark	False								
	serverAuth	✓			S	True					
	clientAuth	✓			S	True					
	emailProtection	✓			S	False					

3.3.18 SSL/TLS Extended Validation Server Certificates - EVCP+ certificates supporting Signature, Authentication & Encryption

LuxTrust SSL/TLS Extended Validation+ Server Certificates are ETSI TS 102 042 EVCP+ Certificates (hereinafter EVCP+ Certificates) certified as generated on Secure User Device, with creation of the keys by the Subscriber, with 2048-bit key size and one (1) or two (2) years validity from issuing start date.

These LuxTrust SSL/TLS Extended Validation+ Server Certificates are compliant with and include the OID reference of the EVCP+ certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.5).

The usage purpose of these LuxTrust SSL/TLS Extended Validation+ Server Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust EVCP+ Certificates include the corresponding LuxTrust EVCP+ OID for SSL/TLS extended validation+ server certificates, i.e., <1.3.171.1.1.10.5.3>.

Appropriate Certificate uses:

The primary purposes of these Certificates are to:

- Identify the legal entity that controls a Web site: Provide a reasonable assurance to the user of an Internet browser that the Web site the user is accessing is controlled by a specific legal entity identified in the EVCP+ Certificate by name, address of Place of Business, Jurisdiction of Incorporation or Registration and Registration Number or other disambiguating information; and
- Enable encrypted communications with a Web site: Facilitate the exchange of encryption keys in order to enable the encrypted communication of information over the Internet between the user of an Internet browser and a Web site.

The secondary purposes of these Certificates are to help establish the legitimacy of a business claiming to operate a Web site or distribute executable code, and to provide a vehicle that can be used to assist in addressing problems related to phishing, malware, and other forms of online identity fraud. By providing more reliable third-party verified identity and address information regarding the business, EVCP+ Certificates may help to:

VERSION 1.16

- Make it more difficult to mount phishing and other online identity fraud attacks using Certificates;
- Assist companies that may be the target of phishing attacks or online identity fraud by providing them with a tool to better identify themselves to users; and
- Assist law enforcement organizations in their investigations of phishing and other online identity fraud, including where appropriate, contacting, investigating, or taking legal action against the Subject.

Prohibited Certificate uses:

ruxtrust

The EVCP+ Certificates focus only on the identity of the Subject named in the Certificate, and not on the behavior of the Subject. As such, these Certificates are not intended to provide any assurances, or otherwise represent or warrant:

- That the Subject named in the EVCP+ Certificate is actively engaged in doing business;
- That the Subject named in the EVCP+ Certificate complies with applicable laws;
- That the Subject named in the EVCP+ Certificate is trustworthy, honest, or reputable in its business dealings; or
- That it is "safe" to do business with the Subject named in the EVCP+ Certificate.

Moreover, usages of EVCP+ Certificates for other purposes than those identified in the present CP are prohibited.

Verification of Applicant's Legal Existence and Identity:

For EVCP+ Certificates, Applicant's legal existence and identity are verified in compliance with the EV Guidelines [13]:

- For Private Organization Subjects:
 - v. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
 - vi. Verify the Applicant's Organization Name as stipulated in the EV Guidelines [13]);
- vii. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);
- viii. Verify the Applicant's Registered Agent as stipulated in the EV Guidelines [13]).
- For Government Entity Subjects:
 - iv. Verify the Applicant's Legal Existence as stipulated in the EV Guidelines [13]);
 - v. Verify the Applicant's Entity name as stipulated in the EV Guidelines [13]);
 - vi. Verify the Applicant's Registration Number as stipulated in the EV Guidelines [13]);

For EVCP+ Certificates, LuxTrust SSL CA shall use a single naming convention as set forth in the EV Guidelines [13] and the Baseline Requirements [14] published by the CA/Browser Forum.

The following table provides the description of the fields for LuxTrust Server Certificates.

SSL	SSL/TLS Extended Validation Server Certificates on Secure User Device									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value				
Base Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumber		~	False							



Attribute	SL/TLS Extended Validation	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	
Attribute	Field	IN ¹⁴	CE	0/м18		Value
		✓	False		FDV	Validated on duplicates.
signatureAlg	algorithm		Faise		S	OID = "1.2.840.113549.1.1.11" -
	agonum				5	SHA256 with RSA Encryption.
signatureVa		✓	False			
Signature va			1 0.50		D	Issuing CA Signature.
issuer		✓	False		S	
	countryName	~			S	LU
	commonName	✓			S	LuxTrust SSL CA x ¹⁸
	organizationName	✓			S	LuxTrust S.A.
Validity		✓	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time + 12;24 Months
subject		✓	False			
	countryName (OID: 2.5.4.6)	*		М	D	Country in which the company's or institution's registered office is established (as specified in the memorandum and articles of association). (ISO3166)
	jurisdictionOfIncorporationCountryNa me (OID: 1.3.6.1.4.1.311.60.2.1.3)	¥		М	D	Contains the country information specified using the applicable ISC country code for the jurisdiction of Incorporation for the Incorporating Agency or Jurisdiction of Registration for a Registration Agency that operates at the country level, at state/pr.
	stateOrProvinceName (OID: 2.5.4.8)	×		М	D	State or Province in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)
	jurisdisctionOfIncorporationStateOrPro vinceName (OID: 1.3.6.1.4.1.311.60.2.1.2)	~		0	D	Contains the jurisdiction for the applicable Incorporating Agency of Registration Agency at the state of province level MUST include both country and state or province information,



SSL	SSL/TLS Extended Validation Server Certificates on Secure User Device								
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value			
	localityName (2.5.4.7)	~		Μ	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association or an equivalent document)			
	jurisdictionOfIncorporationLocalityNam e (1.3.6.1.4.1.311.60.2.1.1)	V		Ο	D	Jurisdiction for the applicable Incorporating Agency or Registration Agency at the locality level MUST include the country and state or province information, where the state or province regulates the registration of the entities at the locality level, as well as the locality information.			
	organizationName (OID: 2.5.4.10)	~		Μ	D	Full legal organization name as listed in the official records of the Incorporating or Registration Agency in the Subject's Jurisdiction of Incorporation or Registration or as otherwise verified by the CA as provided herein			
	businessCategory (OID: 2.5.4.15)	~		Μ	D	Depending on the Subject qualifications, this field contains one of the following String: Private Organization Government Entity			



SS	L/TLS Extended Validation	Serve	er Cert	ificate	s on S	Secure User Device
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	serialNumber			М	D	See EV Guidelines [13] :
	(OID: 2.5.4.5)	×				For Private Organizations, this field MUST contain the Registration (or similar) Number assigned to the Subject by the Incorporating or Registration Agency in its Jurisdiction of Incorporation or Registration, as appropriate. If the Jurisdiction of Incorporation or Registration does not provide a Registration Number, then the date of Incorporation or Registration SHALL be entered into this field in any one of the common date formats. For Government Entities that do not have a Registration Number or readily verifiable date of creation, the CA SHALL enter appropriate language to indicate that the Subject
	postalCode (OID: 2.5.4.17)	~		0	D	is a Government Entity. Postal code of the subject place of business.
	streedAddress (OID: 2.5.4.9)	~		0	D	Number and Street of the physical location of the subject
subjectPublic		✓	False			
	algorithm	✓	1 8130			Public Key: Key length: 2048 bit
	subjectPublicKey	v		м		(RSA); public exponent: Fermat-4 (=010001).
Extensions						
Authority Properties						
authorityKey	Identifier	~	False			
	keyldentifier	~				SHA-1 Hash of the LuxTrust SSL CA public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTSSLCAx ¹⁸ .crt
cRLDistributi	ionPoint	~	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx ¹⁸ .crl



SSL	/TLS Extended Validation	Serve	er Cert	ificate	s on S	Secure User Device
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
Subject						
Properties						
subjectAltNam		~	False			
	SubjectAltName-dNSName	¥		Μ		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	V		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		Ο		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.



SS	L/TLS Extended Validation	Serve	er Cert	ificate	s on S	Secure User Device
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
	SubjectAltName-dNSName	~		0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.
subjectKeyId	SubjectAltName-dNSName	✓	False	0		FQDN (Fully Qualified Domain Name) of application/server – Exact DNS for a Web Server or IP address or unique name of server, owned or controlled by the subject and to be associated with the Subject's server. Wildcard name not allowed for EVCP+ Certificates.



VERSION 1.16

SS	L/TLS Extended Validation	n Serve	er Cert	ificate	s on s	Secure User Device
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
	keyldentifier	~			Fixed	The Key Identifier comprises a four- bit field with a 0100 value, followed by the least significant 60 bits of the
						SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of
. .						unused bit-string bits).
Policy Properties						
keyUsage	1	✓ ✓	True			
	digitalSignature	v			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.5.3
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				ETSI TS 102 042 EVCP+ compliant certificate, on Secure User Device, produced by SSL CA, 2048-bit key size, (1) or (2) years validity, and a key usage combining digital signature (dS bit), key and data encryption as well as extended key usage for server and client authentication.
	PolicyIdentifier	~				0.4.0.2042.1.5
Extended Ke	ey Usage	~	False			
	serverAuth	✓			S	True
	clientAuth	~			S	True
	emailProtection	~			S	False

3.3.19 LuxTrust Object (or Code) Signing Certificates

LuxTrust Code Signing Certificates are ETSI TS 102 042 LCP Certificates not certified as generated on SSCD, with creation of the keys by the Subscriber, with a 2048-bit key size and one (1) or three (3) years validity from issuing start date.

These LuxTrust Code Signing Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.3).

VERSION 1.16

The usage purpose of these LuxTrust Code Signing Certificates is the purpose of digital signature. The LuxTrust LCP Code Signing Certificates include the corresponding LuxTrust LCP OID, i.e., *<1.3.171.1.1.10.5.4>*.

The following table provides the description of the fields for LuxTrust Code Signing Certificates.

	LuxTrust LCP Code Signing Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value					
Base Profi	le										
Version		~	False								
					S	Version 3 Value = "2"					
SerialNum	ber	~	False								
					FDV	Validated on duplicates.					
signatureA	lgorithm	~	False								
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256 with RSA Encryption.					
signatureV	/alue	~	False								
					D	Issuing CA Signature.					
issuer	•	~	False		S						
	countryName	~			S	LU					
	commonName	~			S	LuxTrust SSL CA x ¹⁸					
	organizationName	~			S	LuxTrust S.A.					
validity		~	False								
	NotBefore	~			D	Certificate generation process date/time.					
	NotAfter	~			D	Certificate generation process date/time + 12; 36 months					
subject		~	False								
	countryName	~		м	D	Country in which the company's registered office is established (as specified in the memorandum and articles of association) (ISO3166)					
	stateOrProvinceName	~		0	D						
	localityName	~		М	D	Location in which the company's registered office is established (as specified in the memorandum and articles of association o an equivalent document)					
	organizationName	~		м	D	Names as in articles of association including the legal form (as specified in the memorandum and articles of association o					

trust l



VERSION 1.16

	Lu	xTrust L	CP Code	Signing	Certificate	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
						an equivalent document)
	organizationalUnitName1	\checkmark		0	D	As provided by Subscriber
	organizationalUnitName2	✓		0	D	As provided by Subscriber
	commonName	V		М	D	Names as in articles of association, including the legal form (as specified in the memorandum and articles of association or an equivalent document)
	serialNumber	\checkmark		о	D	NA or Serial Number as provided by subscriber
	emailAddress	\checkmark		0	D	Subject's email address if available
subjectPub	licKeyInfo	\checkmark	False			
	algorithm	\checkmark				Public Key: Key length: 2048 (RSA); public
	subjectPublicKey	\checkmark		М		exponent: Fermat-4 (=010001).
Extensions						
Authority P	roperties					
authorityKe	eyldentifier	~	False			
	keyldentifier	√				SHA-1 Hash of the LuxTrust SSL CA public key
authorityIn	foAccess	~	False			
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
	AccessMethod	~				ld-ad-2
	accessLocation	~				http://ca.luxtrust.lu/LTSSLCAx ¹⁸ .crt
CRLDistrib	utionPoint	\checkmark	False			
	distributionPoint	\checkmark			S	
	fullName	\checkmark				http://crl.luxtrust.lu/LTSSLCAx ¹⁸ .crl
Subject Pro	operties					
subjectAltN	lame	✓	False			
	Rfc822Name	✓		0	D	Subject's email address
subjectKey	Identifier	~	False			
	keyldentifier	~			Fixed	The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused

Page 91 de 98



VERSION 1.16

	L	.uxTrust I	CP Code	Signing	Certificate	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
						bit-string bits).
Policy Prop	perties					
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	False
	dataEncipherment	~			S	False
certificateF	Policies	~	False			
	PolicyIdentifier	~			S	1.3.171.1.1.10.5.4
	policyQualifierID	~			S	ld-qt-1 (CPS)
	qualifier	~			S	http://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~			S	LuxTrust Code Signing Certificate. Not supported by SSCD, Key Generation by Subscriber. GTC, CP and CPS on <u>http://repository.luxtrust.lu</u> . Signed by an SSL CA.
	PolicyIdentifier	~			S	0.4.0.2042.1.3
Extended I	Key Usage	~	False			
	Object Signing	~			S	Set
Netscape I	Proprietary					·
NetscapeC	CertificateType	~	False			
	Object Signing	~			S	Set

3.3.20 LuxTrust SSL/TLS Certificate for Client Authentication

LuxTrust SSL/TLS Client Certificates are ETSI TS 102 042 LCP Certificates not certified as generated on SSCD, with creation of the keys by the Subscriber, with 2048-bit key size and one (1) or three (3) years validity from issuing start date.

These LuxTrust SSL/TLS Client Certificates are compliant with and include the OID reference of the LCP certificate policy of the ETSI Technical Standard 102 042 (i.e., 0.4.0.2042.1.3).

The usage purpose of these LuxTrust SSL/TLS Client Certificates is the combined purpose of digital signature, key and data encryption. The LuxTrust LCP Server Certificates include the corresponding LuxTrust LCP OID for SSL/TLS client certificates, i.e., <1.3.171.1.1.10.5.5>.

The following table provides the description of the fields for LuxTrust Server Certificates.



	LuxTrus	t SSL (client l	LCP Cer		e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Base						
Profile						
Version		•	False			
<u> </u>		✓	_		S	Version 3 Value = "2"
SerialNumb	er		False		FDV	
signatureAlg	l	~	False		FDV	Validated on duplicates.
Signaturerrig	algorithm		1 0130		S	OID = "1.2.840.113549.1.1.11" - SHA25
	agonann				Ŭ	with RSA Encryption.
signatureVa	lue	~	False			
U					D	Issuing CA Signature.
issuer		~	False		S	
	countryName	~			S	LU
	commonName	~			S	LuxTrust SSL CA
	organizationName	~			S	LuxTrust S.A.
Validity		~	False			
	NotBefore	~			D	Certificate generation process date/time.
	NotAfter	~			D	Certificate generation process date/time
						12;36 Months
subject		v	False			
	countryName	✓		М	D	Country in which the company's of institution's registered office is established
						(as specified in the memorandum an articles of association). (ISO3166)
	stateOrProvinceName	~		0	D	
	localityName			М	D	Location in which the company' registered office is established (a
		~				specified in the memorandum and article
						of association or an equivalent document)
	organizationName			М	D	Names as in articles of association
		~				including the legal form (as specified in th
						memorandum and articles of associatio or an equivalent document)
	organizationalUnitName 1			0	D	As provided by Subscriber
	organizationalUnitName 2	~		0	D	As provided by Subscriber
	commonName	~		М	D	As provided by Subscriber
	serialNumber	✓		0	D	Serial Number as provided by subscriber
	emailAddress	~		0	D	Subject's email address
subjectPubli	icKeyInfo	~	False			
	algorithm	✓				Public Key: Key length: 2048 bit (RSA



	LuxTru	st SSL (lient	LCP Cer	tificat	e Profile
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Extensions						
Authority						
Properties						
authorityKey	ldentifier	~	False			
	keyldentifier	\checkmark				SHA-1 Hash of the LuxTrust SSL C
						public key
authorityInfo	Access	~	False			
	AccessMethod	~				ld-ad-1
	accessLocation	~				http://ocsp.luxtrust.lu
	AccessMethod	~				ld-ad-2
	accessLocation	✓				http://ca.luxtrust.lu/LTSSLCAx ¹⁸ .crt
cRLDistribut	ionPoint	✓	False			
	distributionPoint	~			S	
	fullName	~				http://crl.luxtrust.lu/LTSSLCAx ¹⁸ .crl
Subject						
Properties						
subjectAltNa	ame	~	False			
	Rfc822Name	~		0	D	Certificate Holder's email address
subjectKeylo	dentifier	~	False			
	keyldentifier	✓			Fixed	The Key Identifier comprises a four-b
						field with a 0100 value, followed by th
						least significant 60 bits of the SHA-1 has
						of the value or subjectPublicKey bit strin
						(tag, not including the length and number
						of unused bit-string bits).
Policy						
Properties						
keyUsage		~	True			
	digitalSignature	~			S	True
	nonRepudiation	~			S	False
	keyEncipherment	~			S	True
	dataEncipherment	~			S	True
certificatePo	licies	~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.5.5
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~	İ		S	Id-qt-2 (User Notice)
	noticeNumbers		1		1	



VERSION 1.16

	LuxTrust SSL Client LCP Certificate Profile										
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value					
	DisplayText	~				LuxTrust Standard SSL/TLS Client					
						Authentication Certificate. Not supported					
						by SSCD, Key Generation by Subscriber.					
						GTC, CP and CPS on					
						http://repository.luxtrust.lu.					
						Signed by a SSL CA.					
	PolicyIdentifier	\checkmark				0.4.0.2042.1.3					
Extended Ke	ey Usage	~	False								
	serverAuth	✓			S	False					
	clientAuth	~			S	True					
	emailProtection	✓			S	True					

3.3.21 Timestamping Certificate Profile

LuxTrust Timestamping Certificates are issues by the LuxTrust Timestamping CA with keys located on HSM devices, with generation by LuxTrust CSP according to the processes and procedures described in the applicable CP, with a 2048-bit key size and 5 years validity from issuing start date.

The profiles of the public key certificates used by the LuxTrust TSA comply with the RFC 3161 [6]. The full set of rules used by LuxTrust S.A. for the issuing and management of these certificates that are issued by a LuxTrust CA, as well as their extensions, are described in the LuxTrust Internal Certificate Policy for PKI Participants other than Subscribers and Relying Parties.

	LuxTrust Timestamping Certificate Profile									
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value				
Base										
Profile										
Version		~	False							
					S	Version 3 Value = "2"				
SerialNumbe	er	~	False							
					FDV	Validated on duplicates.				
signatureAlg	orithm	~	False							
	algorithm				S	OID = "1.2.840.113549.1.1.11" - SHA256				
						with RSA Encryption.				
signatureVal	ue	~	False							
					D	Issuing CA Signature.				
issuer		~	False		S					
	countryName	~			S	LU				
	commonName	~			S	LuxTrust Global Timestamping CA x ¹⁸				
	organizationName	~			S	LuxTrust S.A.				
Validity		~	False							
	NotBefore	~			D	Certificate generation process date/time.				
	NotAfter	~			D	Certificate generation process date/time +				
						60 Months				
subject		~	False							



subjectPublicKey ✓ M M public exponent: Fermat-4 (=010001). Extensions Image: Status of the stat		LuxTrus	t Time	stampi	ing Cer	tificat	e Profile
Interface Image: Market M	Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value
Instantion Image: Construction Construction organizationName ✓ M D LutTrust S.A. organizationalUnitName1 ✓ M D PKI Entity countryName ✓ O D LU subjectPublicKeyInfo ✓ Faise D Public Key: Key length: 2048 bit (RSA); authority/Name ✓ M D Public Key: Key length: 2048 bit (RSA); subjectPublicKeyInfo ✓ M D Public Key: Key length: 2048 bit (RSA); Properties M M D Public Key: Key length: 2048 bit (RSA); authority/infoAccess Y Faise D D AccessMethod ✓ Faise D D authority/infoAccess Y Faise D Hitp://cat.lutt.st.lut.TGTSACAx1*G.ct accessLocation ✓ Faise D Ind-ad-1 S accessLocation ✓ Faise D Inde://public.key.st.lut.TGTSACAx1*G.ct GRLDistrbutonPoint ✓ Faise		commonName	~		м	D	tts.luxtrust.lu
organizationalUnitName 1 ✓ M D PKI Entity countryName ✓ O D UU subjectPublicKeyInfo ✓ Faise I D algorithm ✓ I M D Public Key: Key length: 2048 bit (RSA) subjectPublicKeyInfo ✓ M D Public Key: Key length: 2048 bit (RSA) subjectPublicKeyInfo ✓ M D public exponent: Fermat-4 (=010001). Extensions M M D public key: Key length: 2048 bit (RSA) Authorty Faise C SHA-1 Hash of the LuxTrust Timestamping CA public key authorty/MoAccess ✓ Faise C Interational Unitrust In/LITGTSACAx ¹⁸ crt AccessMethod ✓ C Id-ad-1 Id-ad-1 accessLocation ✓ Faise C Id-ad-1 accessLocation ✓ Faise C Id-ad-1 accessLocation ✓ Faise C Intip//ortiustrust/u oRLDistributionPoint		localityName	~		М	D	Capellen
organizational method image image image image image subjectPublicKeynin0 × False image image <t< td=""><td></td><td>organizationName</td><td>~</td><td></td><td>М</td><td>D</td><td>LuxTrust S.A.</td></t<>		organizationName	~		М	D	LuxTrust S.A.
ubider Ubik-Keynino ✓ False ✓ algorithm ✓ ✓ ✓ ✓ subjectPublicKey ✓ ✓ ✓ ✓ Properties ✓ ✓ ✓ ✓ authority/Key/dentifier ✓ ✓ ✓ ✓ Autority/intoAccess ✓ ✓ ✓ ✓ authority/intoAccess ✓ ✓ ✓ ✓ AccessMethod ✓ ✓ ✓ ✓ accessLocation ✓ ✓ ✓ ✓ AccessMethod ✓ ✓ ✓ ✓ accessLocation ✓ ✓ ✓ ✓ distributionPoint ✓ ✓ ✓ ✓ fullName ✓ ✓ ✓ ✓ ✓ subjectKey/dentifier ✓ ✓ ✓ ✓ fullName ✓ ✓ ✓ ✓ ✓ subjectKey/dentifier ✓ ✓ ✓ ✓ fullstistionPoint <t< td=""><td></td><td>organizationalUnitName 1</td><td>~</td><td></td><td>М</td><td>D</td><td>PKI Entity</td></t<>		organizationalUnitName 1	~		М	D	PKI Entity
adjectPublicKeymin autortkymin subjectPublicKey subjectKey subjectKe		countryName	~		0	D	LU
algorithm V M Public Key: Key length: 2048 bit (KSA), subjectPublicKey Extensions M public exponent: Fermat-4 (=010001). Extensions M public exponent: Fermat-4 (=010001). Authority Properties False M authority/Key/dentifier V False M AccessMethod V False M AccessMethod V False M AccessMethod V Id-ad-2 Id-ad-1 AccessMethod V M Http://ca.luxtrust.lu/LTGTSACAx. ¹⁸ .crl GatirbutionPoint V False M cacessLocation V M M cacessLocation V False M GatirbutionPoint V False M SubjectAlName V False M Ro822Name V False M subjectKeyldentifier V False M field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not	subjectPubli	cKeyInfo	~	False			
Subject ublickey M Public Exponent. Fermat-4 (=010001). Authority Properties M M Public Exponent. Fermat-4 (=010001). Authority Properties M M M M authority/Key/dentifier ✓ False M M key/dentifier ✓ False M SHA-1 Hash of the LuxTrust Timestamping CA public key authority/InfoAccess ✓ False M Id-ad-2 AccessMethod ✓ False M Id-ad-2 AccessMethod ✓ Id-ad-1 accessLocation ✓ AccessMethod ✓ False M M distributionPoint ✓ False M M fullName ✓ False M M subjectKeyldentifier ✓ False M M subjectKeyldentifier ✓ False M M subjectKeyldentifier ✓ False M M glaubidtKeyldentifier ✓ <		algorithm	~				Public Key: Key length: 2048 bit (RSA);
Authority Properties Authority Properties Authority Regidentifier ✓ False ✓ authority/Key/dentifier ✓ False ✓ SHA-1 Hash of the LuxTrust Timestamping CA public key authority/IntoAccess ✓ False ✓ Id-ad-2 AccessMethod ✓ ✓ Id-ad-2 AccessMethod ✓ ✓ Id-ad-2 AccessMethod ✓ ✓ Id-ad-1 accessLocation ✓ ✓ False ✓ distributionPoint ✓ False ✓ Id-ad-1 discossLocation ✓ False ✓ Mathematical Structure State distributionPoint ✓ False ✓ Mathematical Structure State Subject fulName ✓ False ✓ subjectKeyldentifier ✓ False ✓ ✓ weighentifier ✓ False ✓ ✓ subjectKeyldentifier ✓ False ✓ ✓ field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). ✓ Properties ✓ True ✓ S field w		subjectPublicKey	~		М		public exponent: Fermat-4 (=010001).
Properties Image: second	Extensions						
authorityKeyldentifier							
authoritykeytdermier Paise Paise SHA-1 Hash of the LuxTrust keyidentifier Ý False SHA-1 Hash of the LuxTrust authorityInfoAccess Ý False Id-ad-2 AccessMethod Ý Id-ad-2 Id-ad-2 accessLocation Ý Id-ad-1 Id-ad-1 accessLocation Ý Id-ad-1 Id-ad-1 accessLocation Ý Id-ad-1 Id-ad-1 accessLocation Ý False Id-ad-1 distributionPoint Ý False Id-ad-1 gubject False Id-ad-1 Id-ad-1 Subject False Id-ad-1 Id-ad-1 gubjectAltName Ý False Id-ad-1 subjectAltName Ý False Id-ad-1 keyldentifier Ý False Id-ad-1 subjectAltName Ý False Id-ad-1 keyldentifier Ý False Id-ad-1 keyldentifier Ý	•						
Reyidentmer Y False Timestamping CA public key authortlyInfoAccess Ý False Id-ad-2 AccessMethod Ý Id-ad-1 Id-ad-1 accessLocation Ý Id-ad-1 Id-ad-1 AccessMethod Ý Id-ad-1 Id-ad-1 accessLocation Ý False Id-ad-1 accessLocation Ý False Id-ad-1 distributionPoint Ý False Id-ad-1 Subject InfulName Ý Id-ad Info@luxtrust.lu/LTGTSACAx ¹⁸ .crl SubjectAltName Ý False Info@luxtrust.lu/LTGTSACAx ¹⁸ .crl Id-ad-1 subjectKeyldentfiler Ý False Info@luxtrust.lu/LTGTSACAx ¹⁸ .crl Id-ad-1 subjectAltName Ý False Info@luxtrust.lu/LTGTSACAx ¹⁸ .crl Id-ad-1 subjectAltName	authorityKey			False			
AccessMethod ✓ Paise Id-ad-2 AccessMethod ✓ Id-ad-2 AccessMethod ✓ Id-ad-1 AccessMethod ✓ Id-ad-1 AccessMethod ✓ False Id-ad-1 CRLDistributionPoint ✓ False Id-ad-1 Subject ✓ False Id-ad-1 Fropprise ✓ False Id-ad-1 SubjectName ✓ False Id-ad-1 Rfc822Name ✓ False Id-ad-2 subjectMetifier ✓ False <td></td> <td>keyldentifier</td> <td>v</td> <td></td> <td></td> <td></td> <td></td>		keyldentifier	v				
AccessMethod - - 10-16-3-2 accessLocation - - 10-16-22 AccessMethod - - 10-16-22 AccessLocation - - 10-36-2 accessLocation - - 10-36-2 cRLDistributionPoint - - 10-36-2 distributionPoint - - 10-36-2 distributionPoint - - - 10-36-2 Subject - - - - - Properties - - - - - subjectKey/dentifier - - - - - Rfc822Name - - - - - - subjectKey/dentifier - False - - - - - subjectKey/dentifier - False -<	authorityInfo	Access	~	False			
AccessMethod ✓ Id Id-ad-1 accessLocation ✓ False Id-ad-1 cRLDistributionPoint ✓ False Iditrip/iocsp.luxtrust.lu distributionPoint ✓ S Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Subject ✓ S Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Subject Properties ✓ ✓ S subjectAttName ✓ False Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Rfo822Name ✓ False Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl subjectKey/dentifier ✓ False Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Rfo822Name ✓ ✓ O D subjectKey/dentifier ✓ False Iditrip/iocsp.luxtrust.lu Rfo822Name ✓ ✓ O D subjectKey/dentifier ✓ False Iditrip/iocsp.luxtrust.lu key/dentifier ✓ False Iditrip/iocsp.luxtrust.lu key/dentifier ✓ False Iditrip/iocsp.luxtrust.lu field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Properties ✓ True Iditrip/		AccessMethod	~				Id-ad-2
AccessMethod ✓ Id Id-ad-1 accessLocation ✓ False Id-ad-1 cRLDistributionPoint ✓ False Iditrip/iocsp.luxtrust.lu distributionPoint ✓ S Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Subject ✓ S Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Subject Properties ✓ ✓ S subjectAttName ✓ False Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Rfo822Name ✓ False Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl subjectKey/dentifier ✓ False Iditrip/iocsp.luxtrust.lu/LTGTSACAx ¹⁸ .crl Rfo822Name ✓ ✓ O D subjectKey/dentifier ✓ False Iditrip/iocsp.luxtrust.lu Rfo822Name ✓ ✓ O D subjectKey/dentifier ✓ False Iditrip/iocsp.luxtrust.lu key/dentifier ✓ False Iditrip/iocsp.luxtrust.lu key/dentifier ✓ False Iditrip/iocsp.luxtrust.lu field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Properties ✓ True Iditrip/		accessLocation	~				http://ca.luxtrust.lu/LTGTSACAx ¹⁸ .crt
accessLocation ✓ False Imtp://cdsp.iuxtrust.iu cRLDistributionPoint ✓ False S distributionPoint ✓ S Imtp://cd.luxtrust.lu/LTGTSACAx ¹⁸ .crl Subject ✓ Imtp://cd.luxtrust.lu/LTGTSACAx ¹⁸ .crl Imtp://cd.luxtrust.lu/LTGTSACAx ¹⁸ .crl Subject ✓ False Imtp://cd.luxtrust.lu/LTGTSACAx ¹⁸ .crl subjectAttName ✓ False Imtp://cd.luxtrust.lu/LTGTSACAx ¹⁸ .crl subjectAttName ✓ False Imtp://cd.luxtrust.lu subjectAttName ✓ False Imtp://cd.luxtrust.lu subjectKeyldentfiler ✓ False Imtp://cd.luxtrust.lu subjectKeyldentfiler ✓ False Imtp://cd.luxtrust.lu subjectAttName ✓ False Imtp://cd.luxtrust.lu subjectKeyldentfiler ✓ False Imtp://cd.luxtrust.lu subjectAttName ✓ False Imtp://cd.luxtrust.lu subjectAttName ✓ False Imtp://cd.luxtrust.lu subjectAttName ✓ False Imtp://cd.luxtrust.lu subjectAttStrettort False I		AccessMethod	~				
cRLDistributionPoint ✓ False Image: Comparison of the second secon		accessLocation	~				http://ocsp.luxtrust.lu
distributionPoint \checkmark \sim <th< td=""><td>cRLDistribut</td><td>ionPoint</td><td>~</td><td>False</td><td></td><td></td><td></td></th<>	cRLDistribut	ionPoint	~	False			
Initial Subject Image: Subject AltName Image: Subject AltName Image: Subject AltName Subject Properties Rtc822Name Image: Subject AltName Image: Subject AltName Image: Subject AltName subjectKeyldentifier Image: Subject AltName Image: Subject AltName Image: Subject AltName Image: Subject AltName subjectKeyldentifier Image: Subject AltName Image: Subject AltName Image: Subject AltName Image: Subject AltName keyldentifier Image: Subject AltName Image: Subject AltName Image: Subject AltName Image: Subject AltName Policy Image: Subject AltName Image: Subject AltName Image: Subject AltName Image: Subject AltName Policy Image: Subject AltName Image: Subject AltName Image: Subject AltName Image: Subject AltName Policy Image: Subject AltName Image: Subject AltName Image: Subject AltName Image: Subject AltName Policy Image: Subject AltName Policy Image: Subject AltName Key		distributionPoint	~			S	
Subject Properties Subject/Properties Subject/AttName Y False False subject/AttName Y False 0 D info@luxtrust.lu subjectKeyIdentifier Y False Image: Comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Y True Image: Comprise a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Y True Image: Comprise a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Y True Image: Comprise a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Y True Image: Comprise a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). KeyUsage Y True S		fullName	~				http://crl.luxtrust.lu/LTGTSACAx ¹⁸ .crl
subjectAltName Ý False Ø D info@luxtrust.lu subjectKeyldentifier Ý False Ø D info@luxtrust.lu subjectKeyldentifier Ý False Ø D The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Ý True Ø S True keyUsage Ý True S S False digitalSignature Ý S S False S keyEncipherment Ý S S False Extended Key Usage Ý False S Set TimeStamping Ý S Set Set	-						
Rfc822Name ✓ O D info@luxtrust.lu subjectKeyldentifier ✓ False ✓ False ✓ keyldentifier ✓ False ✓ Fixed The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy ✓ True ✓ S True keyUsage ✓ True ✓ S False keyEncipherment ✓ S False ✓ S False Extended Key Usage ✓ False ✓ S Set TimeStamping (1.3.6.1.5.5.7.3.8) ✓ False ✓ S Set	•	Ime	~	False			
subjectKeyldentifier Ý False Í keyldentifier Ý False Fixed The Key Identifier comprises a four-bit field with a 0100 value, followed by the least significant 60 bits of the SHA-1 hash of the value or subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy ✓ True ✓ Properties ✓ True ✓ keyUsage ✓ True ✓ keyEncipherment ✓ S False keyEncipherment ✓ S False Extended Key Usage ✓ False ✓ TimeStamping ✓ S Set TimeStamping ✓ S Set			✓		0	D	info@luxtrust.lu
keyldentifier ✓ Image: Section of the section of t	subjectKevic		✓	False			
Policy Image: second secon			✓			Fixed	The Key Identifier comprises a four-bit
Policy Properties Image: section of the value of subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Properties Image: section of the value of subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). KeyUsage Image: section of the value of subjectPublicKey bit string bits). KeyUsage Image: section of the value of subjectPublicKey bit string bits). KeyEncipherment Image: section of the value of subjectPublicKey bit string bits). Image: section of the value of subjectPublicKey bit string bits). Image: section of the value of subjectPublicKey bit string bits). Image: section of the value of subjectPublicKey bit section of the value of subjectPublicKey bit string bits). Image: section of the value of subjectPublicKey bit section of the value of subjectPublicKey bit section of the value of of the v		Royldonanol				1 IAGU	
Policy ✓ Image: Section of the value of subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). Policy Properties ✓ True ✓ keyUsage ✓ True ✓ Section of the value of subjectPublicKey bit string (tag, not including the length and number of unused bit-string bits). keyUsage ✓ True ✓ keyUsage ✓ True ✓ nonRepudiation ✓ S False keyEncipherment ✓ S False dataEncipherment ✓ S False Extended Key Usage ✓ False ✓ TimeStamping (1.3.6.1.5.5.7.3.8) ✓ S Set							
Policy Properties Image: Constraint of the second of							-
Policy Properties Properties Image: second sec							(tag, not including the length and number
Policy Properties Properties Image: second sec							of unused bit-string bits).
keyUsage ✓ True ✓ digitalSignature ✓ S True nonRepudiation ✓ S False keyEncipherment ✓ S False dataEncipherment ✓ S False Extended Key Usage ✓ False ✓ TimeStamping ✓ S Set (1.3.6.1.5.5.7.3.8) ✓ S Set	Policy						
digitalSignature ✓ Image: Constraint of the second							
digital signature Image: Sector S	keyUsage			True			
Indication S False keyEncipherment ✓ S False dataEncipherment ✓ S False Extended Key Usage ✓ False ✓ TimeStamping (1.3.6.1.5.5.7.3.8) ✓ S Set						S	True
KeyEncipherment ✓ S False dataEncipherment ✓ S False Extended Key Usage ✓ False ✓ TimeStamping (1.3.6.1.5.5.7.3.8) ✓ S Set							
GataEncipherment S False Extended Key Usage ✓ False TimeStamping (1.3.6.1.5.5.7.3.8) ✓ S Set						S	False
TimeStamping (1.3.6.1.5.5.7.3.8) ✓ S Set		dataEncipherment				S	False
(1.3.6.1.5.5.7.3.8)	Extended Ke	ey Usage		False			
			~			S	Set
	Private Kev		~	False			



VERSION 1.16

LuxTrust Timestamping Certificate Profile						
Attribute	Field	IN ¹⁴	CE ¹⁵	O/M ¹⁶	CO17	Value
	Usage period (2.5.29.16)	~		М	D	Certificate generation process date/time +
						12 Months
certificatePolicies		~	False			
	PolicyIdentifier	~				1.3.171.1.1.10.8.1
	policyQualifierID	~			S	Id-qt-1 (CPS)
	qualifier	~			S	https://repository.luxtrust.lu
	policyQualifierID	~			S	Id-qt-2 (User Notice)
	noticeNumbers					
	DisplayText	~				LuxTrust LCP certificate compliant with ETSI TS 102 042. Sole authorised usage: Signature of LuxTrust Trusted Time Stamp
		✓				tokens generated by LuxTrust time- stamping authority.
	PolicyIdentifier	v				0.4.0.2042.1.3

3.3.22 Certificate extensions

X.509 v3 extensions are supported and used as indicated in the Certificates profiles as described in the present document.

3.3.23 Algorithm object identifiers

Algorithms OID are conforming to IETF RFC 3279 [10] and RFC 5280 [11].

3.3.24 Name forms

Name forms are in the X.500 distinguished name form as implemented in RFC 3739 [12].

3.3.25 Name constraints

Name constraints are supported as per RFC 5280 [11].

3.3.26 Certificate policy object identifier

Certificate policy object identifiers are used as per RFC 3739 [12].

3.3.27 Usage of Policy Constraints extension

Usage of Policy Constraints extension is supported as per RFC 5280 [11].

3.3.28 Policy qualifiers syntax and semantics

The use of policy qualifiers defined in RFC 5280 [11] is supported.

3.3.29 Processing semantics for the critical Certificate Policies

Not applicable.

3.4 CRL profile

In conformance with the IETF PKIX RFC 2459, the LuxTrust CAs support CRLs compliant with:

- Version numbers supported for CRLs
- CRL and CRL entry extensions populated and their criticality.

Page 97 de 98



VERSION 1.16

The profile of the CRL is provided in the table below:

LuxTrust CRL Profile					
Field	Comments				
Version	v2				
Signature	Sha1RSA				
Issuer	<subjectca></subjectca>				
thisUpdate	<creation time=""></creation>				
nextUpdate	<creation +="" 100="" ca="" days="" for="" global="" root="" time=""></creation>				
	<creation (4="" +="" 30="" 4,5="" and="" for="" hours="" minutes)="" subordinate<="" th="" time=""></creation>				
	Qualified and SSL CAs>				
	<creation +="" 24="" cas="" for="" hours="" other="" subordinate="" time=""></creation>				
revokedCertificates					
userCertificate	<certificate number="" serial=""></certificate>				
revocationDate	<revocation time=""></revocation>				
crlEntryExtensions					
reasonCode	<insert code="" list="" of="" reason="" revocation="" used=""></insert>				
crlExtensions					
cRLNumber	Non-critical <subject ca="" identifier="" key=""></subject>				
authorityKeyIdentifier	Non-critical <ca assigned="" number="" unique=""></ca>				

3.4.1 Version number(s)

See section 3.4.

The CA will support X.509 version 2 CRLs, retrievable by online at http://crl.luxtrust.lu.

As an alternative to CRLs the CA may provide other web based or "other" revocation checking service.

3.4.2 CRL entry extensions

See section 3.4.

3.5 OCSP profile

The OCSP profile follows IETF PKIX RFC 2560 OCSP v1 and v2. No OCSP extensions are supported. The LuxTrust CAs support signed status requests, and multiple Certificates status requests in one OCSP request as long as they are signed by the same CA.

3.5.1 Version number(s)

See section 3.5.

3.5.2 OCSP extensions

See section 3.5.